



aux.contact module, 4-poles, front



Powering Business Worldwide™

Part no. DILA-XHI40
 Article no. 276428
 Catalog No. XTCEXFAC40

Delivery programme


Product range
 Accessories
 Description
 Function
 Pole
 Connection technique
 Rated operational current
 AC-3
 Conventional free air thermal current, 3 pole, 50 - 60 Hz
 Open
 at 60 °C
 AC-15
 220 V 230 V 240 V
 380 V 400 V 415 V
 Contacts
 N/O = Normally open
 Mounting type
 Contact sequence

$I_{th} = I_e$	A
I_e	A
I_e	A

Accessories
 Auxiliary contact modules with interlocked opposing contacts for standard applications
 4 pole
 Screw terminals

16
4
4

4 N/O
 Front fixing



For use with

DILM(C)7...
 DILM(C)9...
 DILM(C)12...
 DILM(C)15...
 DILM(C)17...
 DILM(C)25...
 DILM(C)32...
 DILM38...
 DILMP20...
 DILMP32...
 DILMP45...
 DILL...
 Interlocked opposing contacts according to IEC/EN 60947-5-1 appendix L, inside the auxiliary contact modules, also for the integrated auxiliary contacts of the DILM 7 - DILM32
 Auxiliary contacts used as mirror contacts according to IEC/EN 60947-4-1 Appendix F (not N/C late open)

Instructions

Code number and version of combination
 Distinctive number

80E
71
62

Approvals

Product Standards	IEC/EN 60947-4-1; UL 508; CSA-C22.2 No. 14-05; CE marking
UL File No.	E29184
UL Category Control No.	NKCR
CSA File No.	012528
CSA Class No.	3211-03
North America Certification	UL listed, CSA certified
Specially designed for North America	No

Electrical specifications for standard auxiliary contacts

Interlocked opposing contacts within an auxiliary contact module (to IEC 60947-5-1 Annex L)		Yes
N/C contact (not late-break contact) suitable as a mirror contact (to IEC/EN 60947-4-1 Annex F)		DILM7 - DILM32
Rated impulse withstand voltage	U_{imp}	V AC 6000
Overvoltage category/pollution degree		III/3
Rated insulation voltage	U_i	V AC 690
Rated operational voltage	U_e	V AC 500
Safe isolation to EN 61140		
	between coil and auxiliary contacts	V AC 400
between the auxiliary contacts	V AC 400	

Rated operational current

Conventional free air thermal current, 3 pole, 50 - 60 Hz

Open

at 60 °C

AC-15

220 V 230 V 240 V

380 V 400 V 415 V

500 V

DC current

DC L/R 15 ms
24 V

60 V

110 V

220 V

DC L/R 50 ms
3

3

3

3

DC-13 (6xP)

Contacts in series:

3

3

3

3

Contacts in series:

1

1

2

1

3

1

3

Control circuit reliability

Component lifespan

at $U_e = 230 V$, AC-15, 3 A

Short-circuit rating without welding

max. fuse

	A	
$I_{th}=I_e$	A	16
I_e	A	4
I_e	A	4
I_e	A	1.5
I_e	A	10
I_e	A	6
I_e	A	3
I_e	A	1
24 V	A	2.5
60 V	A	1
110 V	A	0.5
220 V	A	0.25
	A	
24 V	A	2.5
60 V	A	1
110 V	A	0.5
220 V	A	0.25
	A	
24 V	A	10
60 V	A	6
60 V	A	10
110 V	A	3
110 V	A	6
220 V	A	1
220 V	A	5
Failure rate	λ	$<10^{-8}$, < one failure at 100 million operations (at $U_e = 24 V$ DC, $U_{min} = 17 V$, $I_{min} = 5.4 mA$)
Operations	x 10^6	1.3
	A gG/ gL	10

Technical data ETIM 5.0

Low-voltage industrial components (EG000017) / Auxiliary contact block (EC000041)

Electric engineering, automation, process control engineering / Low-voltage switch technology / Component for low-voltage switching technology / Auxiliary switch block
(ecl@ss8-27-37-13-02 [AKN342009])

Number of contacts as change-over contact

0

Number of contacts as normally open contact

4

Number of contacts as normally closed contact

0

Rated operation current I_e at AC-15, 230 V

A

4


Type of electric connection

Screw connection


Mounting method

Top mounting

Dimensions

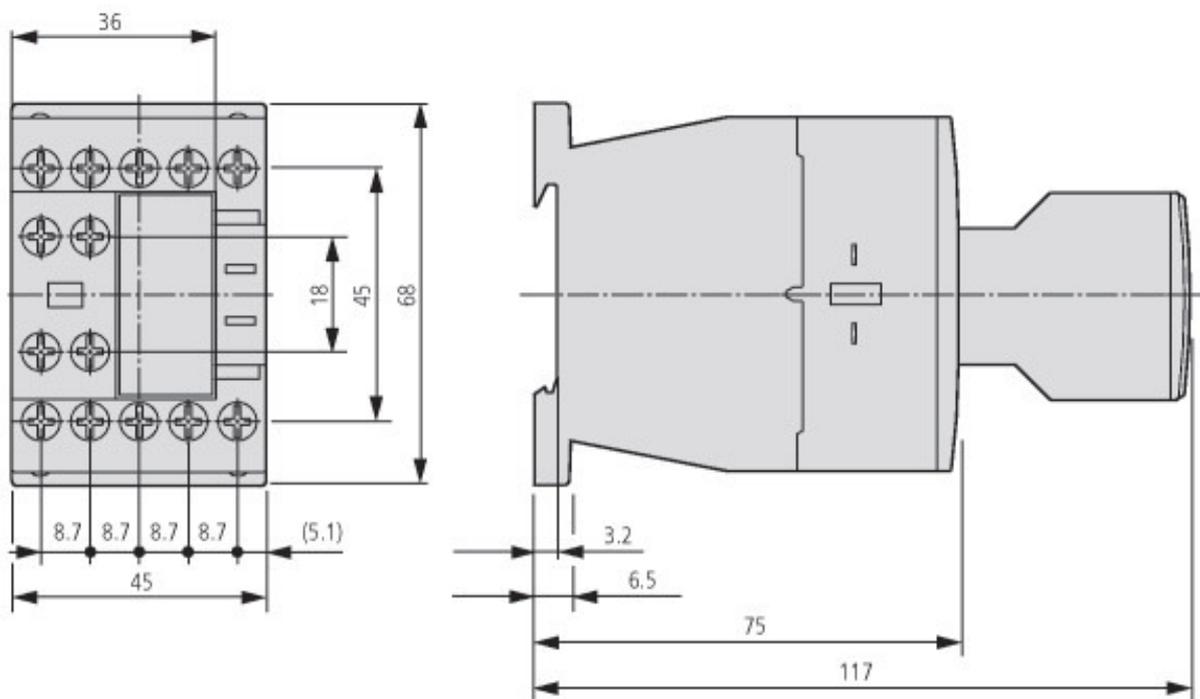

Contacteur avec module de contact auxiliaire

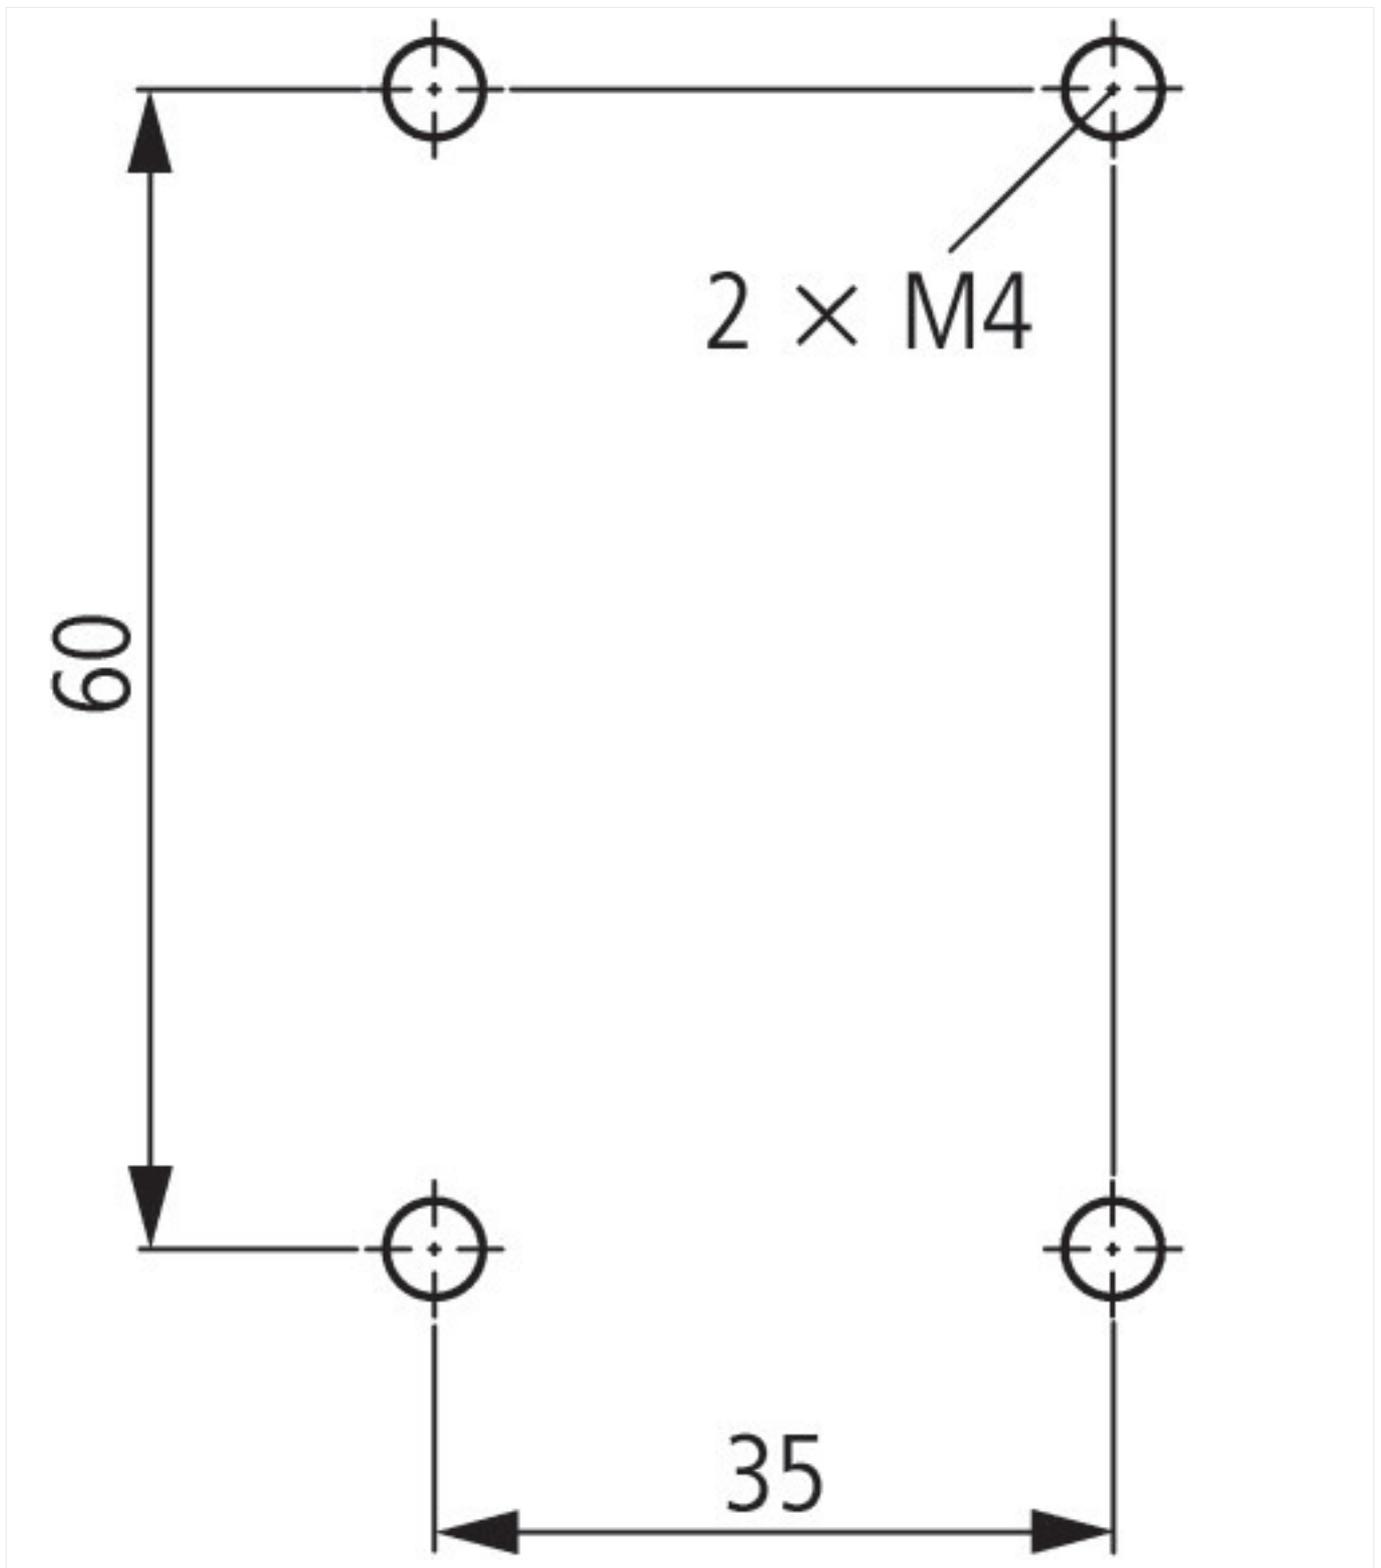

Additional product information (links)

IL03407013Z (AWA2100-2126) Contactors

IL03407013Z (AWA2100-2126)
Contactors

ftp://ftp.moeller.net/DOCUMENTATION/AWA_INSTRUCTIONS/IL03407013Z2012_03.pdf

<http://de.ecat.moeller.net/flip-cat/?edition=HPLTE&startpage=5.84>

Switchgear of Power Factor Correction
Systems

http://www.moeller.net/binary/ver_techpapers/ver934en.pdf

X-Start - Modern Switching
Installations Efficiently Fitted and
Wired Securely

http://www.moeller.net/binary/ver_techpapers/ver938en.pdf

Mirror Contacts for Highly-Reliable
Information Relating to Safety-Related
Control Functions

http://www.moeller.net/binary/ver_techpapers/ver944en.pdf

Effect of the Cabel Capacitance of
Long Control Cables on the Actuation
of Contactors

http://www.moeller.net/binary/ver_techpapers/ver949en.pdf

Motor starters and "Special Purpose Ratings" for the North American market	http://www.moeller.net/binary/ver_techpapers/ver953en.pdf
Switchgear for Luminaires	http://www.moeller.net/binary/ver_techpapers/ver955en.pdf
Standard Compliant and Functionally Safe Engineering Design with Mechanical Auxiliary Contacts	http://www.moeller.net/binary/ver_techpapers/ver956en.pdf
The Interaction of Contactors with PLCs	http://www.moeller.net/binary/ver_techpapers/ver957en.pdf
Busbar Component Adapters for modern Industrial control panels	http://www.moeller.net/binary/ver_techpapers/ver960en.pdf