

PVC FLEXIBLE CORDS



AUSTRALIA PACIFIC ELECTRIC CABLES


TWIN FIG 8 250V to AS 3191

Conductor: annealed copper.
Insulation and sheath: PVC

Compounds for continuous
conductor temperature of:
*75°C (with FFC Code)
**90°C (with FFR Code)

Standard Colours

Sheath: White
- Black
- Grey/Black
- Red/White
- White/Black

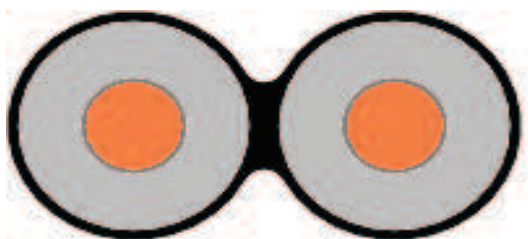

Nominal conductor area	Average insulation thickness	Approximate overall diameter	Approximate mass	Product Code
mm ²	mm	mm	kg/100m	
Fig. 8				
0.75	0.8	2.8 x 6	2.8	*Old - FFC22402 **New – FFR22402

Brisbane Office and Factory	Sydney Distribution Centre	Melbourne Distribution Centre	Perth Distribution Centre
89 Platinum Street, Crestmead, Qld 4132 Phone: (07) 3802 3688 Fax: (07) 3803 6868	Unit 2, 423-427 Victoria St, Wetherill Park, NSW 2164 Phone: (02) 9609 1580 Fax: (02) 9609 1063	188 Holt Parade, Thomastown, VIC 3074 Phone: (03) 9465 1188 Fax: (03) 9465 9333	41 Banksia Road, Welshpool, WA 6106 Phone: (08) 9350 1300 Fax: (08) 9350 1333