





RG6Q/30B — 30m coil
RG6Q/100B — 100m spool
RG6Q/305B — 305m reel in a box



RG6 QUAD SHIELD COAXIAL CABLE

30M COIL, 100M SPOOL, 305M REEL IN A BOX

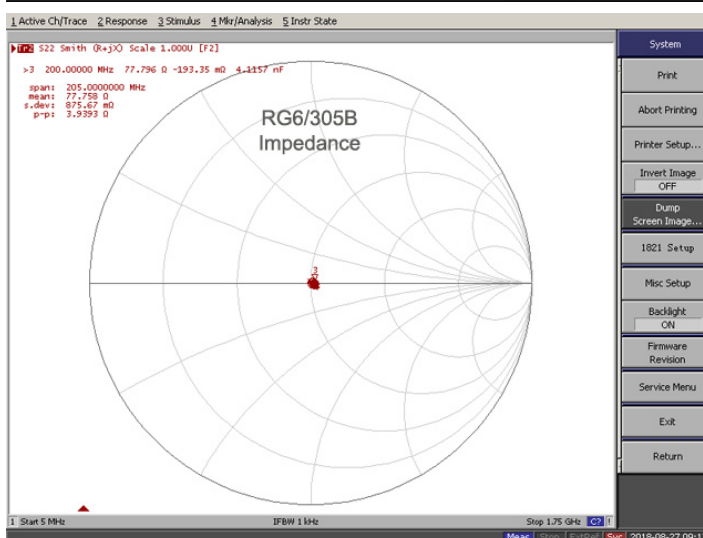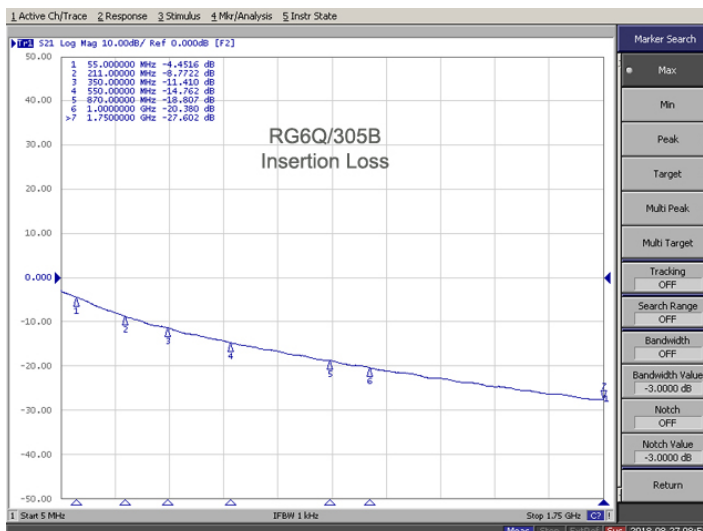

CONSTRUCTION

Center Conductor: 1.02 ±0.01mm Solid Copper Clad Steel
Dielectric: 4.57 ±0.05mm Foam Polyethylene
Shield: AL Foil bonded to dielectric
Braid Coverage: 60% x 16 x 4 x 0.16 ±0.005 mm AL Wire
Foil: APA
Braid Coverage: 40% x 16 x 3 x 0.16 ±0.005 mm AL Wire
Jacket: 7.5 ±0.10mm PVC

CHARACTERISTICS

Spark Test: 4000VAC
Impedance: 75 Ohms ±3
Capacitance: 54 pF/m ±3
Velocity of Propagation: 85%
Return Loss: 20dB min (5-2300MHz)

ATTENUATION

Attenuation measured @ 20°C

Frequency (MHz)	dB per 100m max
55	4.94
211	9.43
350	12.2
550	15.62
870	19.99
1000	21.46
1750	28.66

Laceys.tv
 Email: sales@laceys.tv
 Website: online.laceys.tv

Melbourne Head Office:
 42 Brunel Road, Seaford
 VIC 3198, Australia
 Ph (03) 9776 9222
 Fax (03) 9776 9766

Sydney:
 Ph (02) 9755 5026
 Fax (02) 9755 5027

Brisbane:
 Ph (07) 3290 2410
 Fax (07) 3290 2552

Coffs Harbour:
 Ph (02) 6651 6100
 Fax (02) 6651 7022

Townsville:
 Ph (07) 4779 3608