

Brass Female Couplings for Hazardous Areas


- For indoor or outdoor use
- Jointing of conduit - male to male penetration
- Degree of protection against ingress of water IP66/68
- Compliance with IECEx CES 13.0022X

Protection types: Ex db IIC Gb, Ex eb IIC Gb, Ex tb IIIC Db, IP66/68

Standards: IEC/AS/NZS60079 (.0, .1, .7, .31), IEC/AS/NZS 60529

Material: Brass, Nickel Plated

Temperature Range: -60°C/+130°C

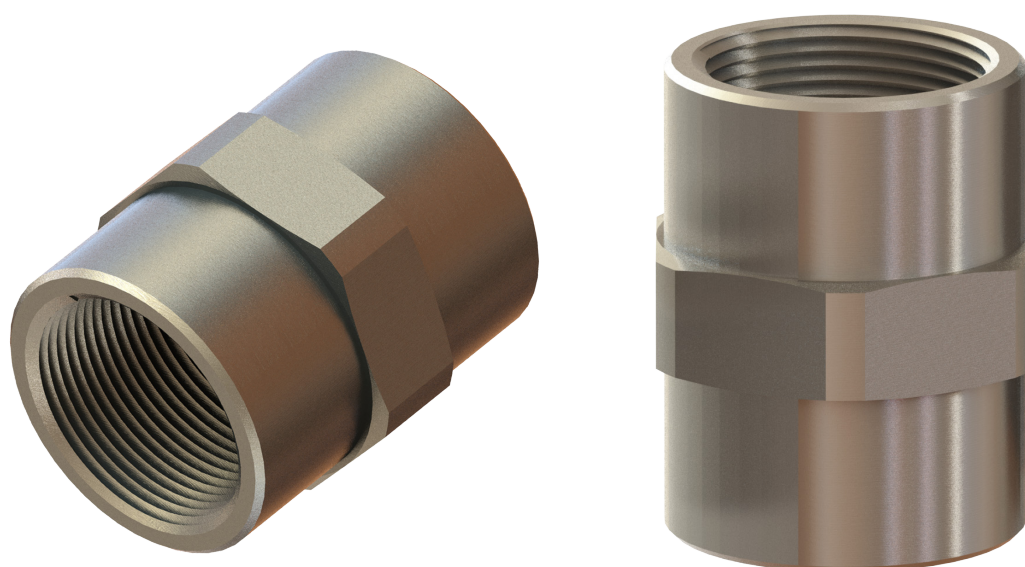

Cat. No.	Threads Diameter x Length	Diameter		Length
		Across Flats	Across Points	
ALCBJBM16M16	M16 X 15	20	22	33
ALCBJBM20M20	M20 X 15	25	27.5	32
ALCBJBM25M20	M25 X 15 / M20 x 15	32	35	33
ALCBJBM25M25	M25 X 15	32	35	33
ALCBJBM32M32	M32 X 15	36	39.5	32
ALCBJBM40M40	M40 X 18	45	50	38
ALCBJBM50M50	M50 X 18	55	61	38
ALCBJBM63M63	M63 X 18	68	75	38

All dimensions in mm unless otherwise specified. Note: metric threads 1.5mm pitch, unless otherwise specified.