

AXIAL IN-LINE FANS

Punto Ghost Series

COMPACT



The Punto Ghost is suitable for installation in walls and ceilings, false ceilings, lofts and internal walls. Available with or without a timer.


Technical Data

| Model | Code | V | W | A | Rpm | m ³ /h | L/s | Pa | dBA@3m | °C max |
|-------------|----------|-----|----|------|------|-------------------|------|----|--------|--------|
| MG100/4" LL | ALV11100 | 240 | 18 | 0.10 | 2415 | 80 | 22.2 | 25 | 39 | 40 |
| MG120/5" LL | ALV11116 | 240 | 20 | 0.12 | 2250 | 160 | 44.4 | 44 | 43 | 50 |
| MG150/6" LL | ALV11117 | 240 | 30 | 0.18 | 2200 | 320 | 89 | 69 | 48 | 50 |

Features

- Available with or without timer
- Motor with shielded poles and ball bearings
- Can be used as temperature blenders in adjacent rooms
- Rating IPX4

Dimensions

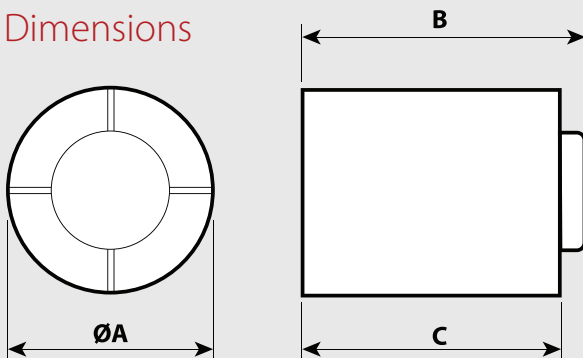

| | A | B | C |
|-------------|-----|-----|-----|
| MG100/4" LL | 99 | 92 | 89 |
| MG120/5" LL | 119 | 103 | 89 |
| MG150/6" LL | 155 | 110 | 107 |

Performance Curves

