

WALL / CEILING FANS

Punto Series

ENERGY EFFICIENT

The Punto Range is excellent for intermittent and continuous ventilation of bathrooms, toilets, kitchens or utility rooms in domestic or commercial properties.


Technical Data

Model	Code	V	W	A	Rpm	m ³ /h	L/s	Pa	dBA-3m	Kg
M100/4	ALV11201	240	18	0.1	2300	90	25	29	37.5	0.6
M120/5	ALV11301	240	20	0.12	2100	175	48.6	44	39.5	0.8
M150/6	ALV11401	240	30	0.15	2100	335	93.1	59	46	1.1

Features

- High air-flow rate
- Low operating noise levels
- Low power consumption
- Auto-shutter

Dimensions

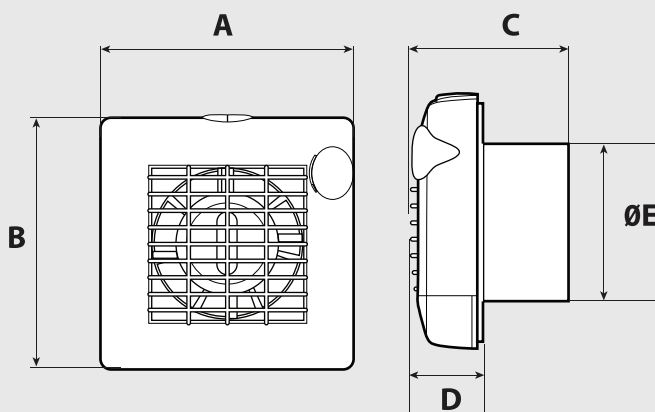

	A	B	C	D	ØE
M100/4	159	160	100	47	99
M120/5	179	181	110	47	119
M150/6	214	215	117	47	156

Performance Curves

