

Product Datasheet

Underground to Overhead (UGOH)



- 1.9mm hot dipped galvanised zinc sheet metal
- Mounting saddles required
- 3 Metres long
- Mechanical protection for underground to overhead cables and conduits
- Suitable for use on Supply Authority Poles


Specifications

Category	Pole Accessories
Material	1.9mm hot dipped galvanised zinc sheet metal
Mounting	Saddles: x2 8.5mm diameter holes, 18mm off cable guard each side
Shape	Laser-cut & folded “U” section
Weight	2 – 7kg
Compliance	NSW Service & Installation Rules AS/NZS 4680 Suitable for Supply Authority Use


Product Datasheet

Underground to Overhead (UGOH)

Part No.	Saddle	Dimensions (mm)	Suits	Mounting Holes
UGOH5530	-	55 x 55 x 3000	-	-
UGOH7530	-	75 x 75 x 3000	-	-
UGOH10030	-	100 x 100 x 3000	-	-
UGOH15030	-	150 x 150 x 3000	-	-
UGOH5530.AD	Pack of 3	59 x 101	UGOH5530	x2 8.5mm
UGOH7530.AD	Pack of 3	79 x 121	UGOH7530	x2 8.5mm
UGOH10030.AD	Pack of 3	104 x 146	UGOH10030	x2 8.5mm
UGOH15030.AD	Pack of 3	164 x 196	UGOH15030	x2 8.5mm

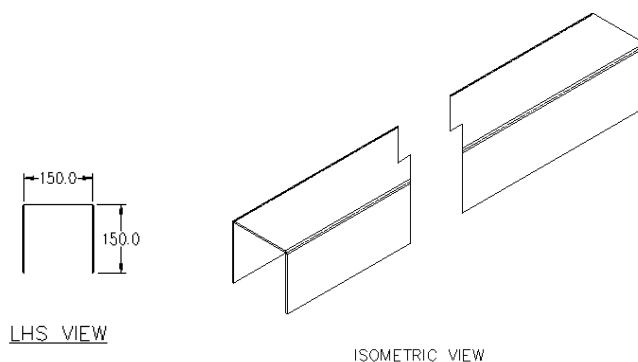

UGOH15030 – UGOH CHANNEL GALVANISED 150x150x3000 (SADDLE EXCLUDED)

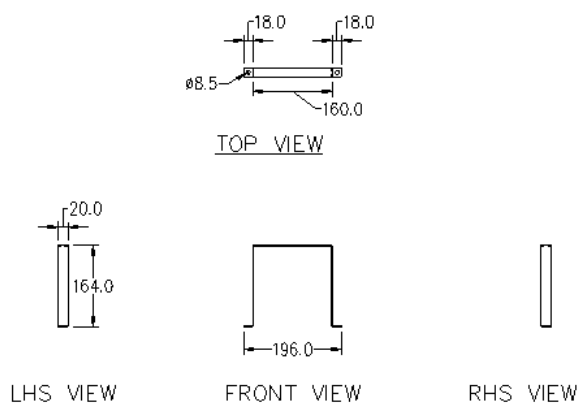

UGOH15030.AD – UGOH CHANNEL GALVANISED 150mm SADDLE (3 OFF)