



ECO LED CCT DIMMABLE DOWNLIGHT



220-
240V
AC

8W
800lm

TRI-COLOUR
CCT

100°
BEAM
SPREAD

DIMMING

90mm

IC-F
ABUTTED &
COVERED

IC-4

3YR
WARRANTY

The ideal downlight for new or existing downlight installs. Its fixed design provides a wide angled diffused beam. Change the colour temperature from warm white to cool white or daylight, using the switch located on the back of the unit.

- Fixed head, flush fascia downlight that easily integrates with ceiling.
- 0.6m Flex & plug.
- Delivers a high level of lumens with a lower wattage output.
- Perfect for new or retro-fit installations with a standard 90mm hole cut-out.
- Easily change colour temperature (CCT) from warm white 3000K, cool white 4000K to daylight 5000K using the switch located on the back of the unit.
- IC-F and IC-4 rated - Can be safely covered and abutted to building insulation.
- IP44 rated (front fascia only).
- SAA approved with integrated dimmable driver.

APPLICATIONS

- Ideal for any residential or commercial interior space






ECO LED CCT DIMMABLE DOWNLIGHT

TECHNICAL SPECIFICATIONS

Operating voltage:	220-240V / 50Hz
Class:	Class II (2)
Wattage:	8W Total
Working Temperature Range:	0 - 40°C
Lumens:	650 Total lumens (3000K) 800 Total lumens (4000K) 720 Total lumens (5000K)
Colour temperature:	3000°K (Warm white) 4000°K (Cool white) 5000°K (Daylight)
Macadam Steps (SDCM):	5
Beam angle:	100 degrees
Colour rendering index:	≥80
Power factor:	≥0.90
Dimmable:	Yes
IC-4 rated:	Ta 40°C
Rated lifetime:	60,000 hrs, reported TM-21, L70(10k)
Construction:	Polyamide, aluminium and PC diffuser
Warranty:	3 year replacement
Standards:	AS/NZS 60598.1 AS/NZS 60598.2.2 AS/NZS 61347.1 AS/NZS 61347.2.13 AS CISPR 15

INSTALLATION

Must be installed by a licensed electrician

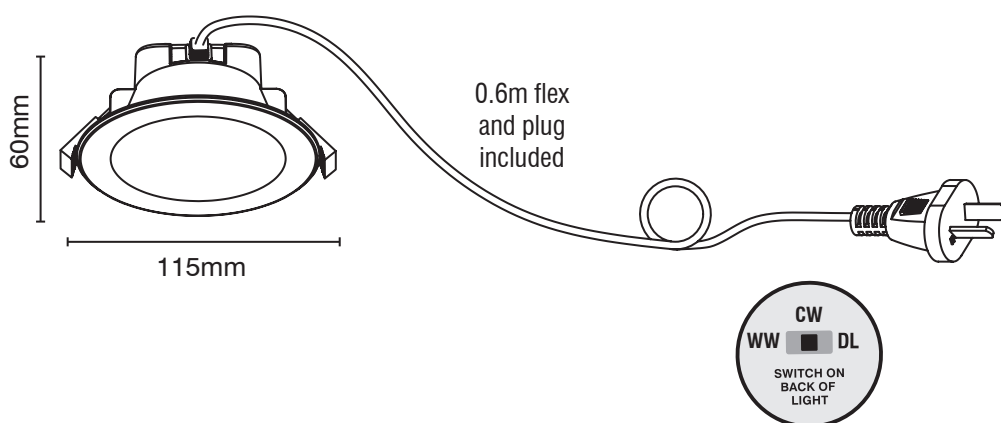

	MODEL	COLOUR	DESCRIPTION	BOX SIZE	GROSS WEIGHT	BOX QTY	BARCODE/TUN
RETAIL BOX	22828/05	White	Eco LED CCT Downlight	W120 x H75 x D120 mm	0.2 kg	1 pc	 9 312641 228288 >
OUTER CTN	22828/05	White	Eco LED CCT Downlight	W380 x H310 x L500 mm	10.1 kg	48 pc	 19312641228285