


CCG A2 compression gland

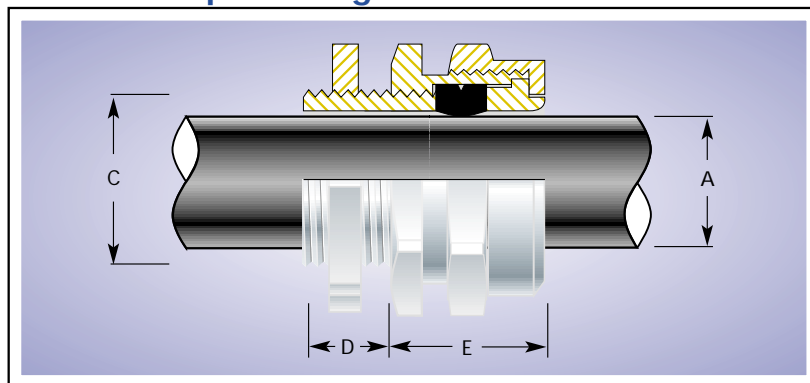

Product Code	Gland Size Reference	Entry Thread		Cable Details Min-Max 'A'	Overall Length 'E'	Hexagonal Details (Max)	
		Diameter 'C'	Length 'D'			'Flats'	'Crns'
053516	00-16ss	M16	10	1.0-6.0	18	17	19
053500	00-20ss	M20	10	3.0-8.0	18	22	25
0535-0	0-20s	M20	10	7.0-11.0	18	22	25
053501	1-20	M20	10	11.0-14.5	20	27	31
053502	2-25	M25	10	14.5-20.5	25	35	40
053503	3-32	M32	10	20.5-26.5	25	42	48
053504	4-40	M40	15	26.5-34.5	28	52	60
053505	5-50	M50	15	34.5-43.5	30	65	75
053506	6-63	M63	15	43.5-56.0	35	82	94
053507	7-75	M75	15	56.0-65.0	40	96	110
053508	8-82	M82	15	65.0-74.0	50	100	115
053509	*9-90	M90	15	73.0-82.0	59		

All dimensions are in mm. † Dimensions may differ from published table.

*Size 9 is of round slotted material, for use with 'C' spanner.

Features and Benefits

- For indoor/outdoor use.
- Seals on the cable sheath, to IP68 if fitted with a gasket.
- Specially formulated elastomeric seals.
- Wide sealing range
- Precision manufactured from high quality brass and nickel plated.
- Complete with high quality brass locknuts.
- By removing the outer nut seal and bush the inners of sizes 1 to 3 can be used as metric reducers.
- Also available in aluminium on request.

Technical Data

Type	A2
Gland Material	Brass (Nickel Plated), Aluminium
Seal Material	Thermoplastic Elastomer (Silicone on request)
Cable Type	Unarmoured
Sealing Area	Outer sheath
Optional Accessories	Locknut, Shroud, Earth Tag, Adaptor / Reducer

Standards and Certifications

Compliance Code	Certification No.
BS6121 Part 1 1989	SGS 1542\97153
SANS/SABS 1213	787\80054\D586
Ingress Protection	IP66/67/68
Operating Temperature	-30°C TO +130°C