


CCG BW captive cone gland

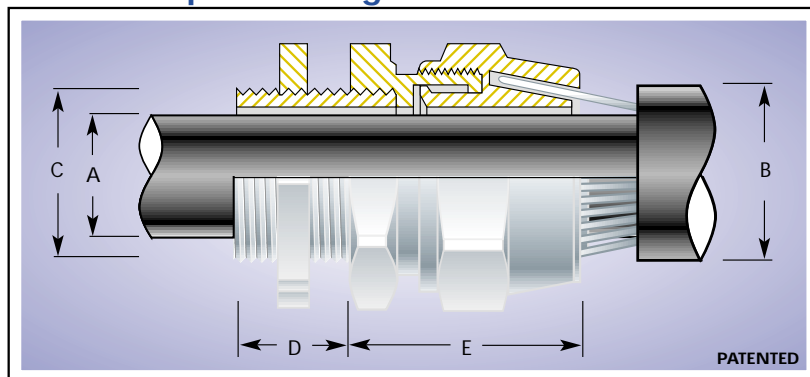

Product Code	Gland Size Reference	Entry Thread		Cable Details Maximum Diameter		Overall Length 'E'	Hexagonal Details (Max)	
		Diameter 'C'	Length 'D'	'A'	'B'		'Flats'	'Crns'
0503-0	0-20s	M20	10	12.6	16.0	23	22	25
050301	1-20	M20	10	15.9	19.0	26	27	31
050302	2-25	M25	10	20.6	26.5	29	35	40
050303	3-32	M32	10	26.5	33.0	32	42	48
050304	4-40	M40	15	34.9	40.5	36	52	60
050305	5-50	M50	15	44.6	51.0	45	65	75
050306	6-63	M63	15	57.0	67.0	50	82	94
050307	7-75	M75	15	68.0	79.5	60	96	110
050308	8-82	M82	15	74.0	83.0	65	100	115
050309	*9-90	M90	15	82.0	91.0	69		
050310	*10-100	M100	15	93.0	100.0	88		

All dimensions are in mm. † Dimensions may differ from published table.

*Sizes 9 and 10 are of round slotted material, for use with 'C' spanner.

Features and Benefits

- For indoor use.
- Two piece handling, no loose parts.
- Freely rotating captive cone, providing an armour clamp and earth bond without twisting the steel wire armouring.
- Adjustable bush for use with thick gland plates.
- By removing the outer nut and bushes the inners of sizes 1 to 3 can be used as metric reducers.
- Precision manufactured from high quality brass and nickel plated.
- Complete with high quality brass locknuts.
- Also available in aluminium on request.

Technical Data

Type	BW
Gland Material	Brass (Nickel Plated), Aluminium
Cable Type	Steel Wire Armour / Aluminium Armour Wire
Armour Clamping	Captive Rotating Cone
Optional Accessories	Locknut, Shroud, Earth Tag, Adaptor / Reducer

Standards and Certifications

Compliance Code	Certification No.
BS6121 Part 1 1989	SGS3641\99367
SANS/SABS 1213	787\85772K756
Ingress Protection	IP2X