


CCG POSI-FLEX compression gland

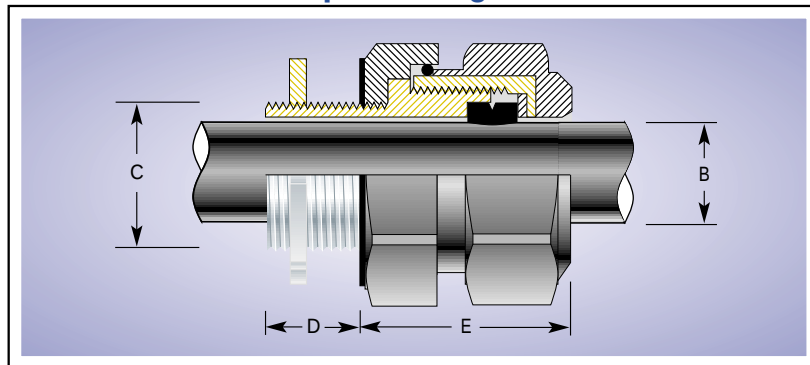

Features and Benefits

- For use in highly corrosive locations.
- All brass parts encapsulated in a non-corrosive body.
- Wide Sealing Range
- Complete with a fitted elastomeric seal to seal cable IP68.
- Supplied with a brass locknut and polypropylene gasket.

Technical Data

Type	POSI FLEX
Gland Material	Brass Encapsulated in Glass Reinforced Polyester/PBT
Seal Material	Thermoplastic Elastomer
Cable Type	Unarmoured
Seal Material	Outer sheath
Optional Accessories	Locknut

Standards and Certifications

Compliance Code	Certification No.
SANS/SABS 1213	SR56U
BS6121 Part 3 1987	
AS1939-1990	WATAC 1089.2
Ingress Protection	IP66/67/68
Operating Temperature	-30°C to +130°C

Product Code	Gland Size Reference	Entry Thread		Cable Details	Overall Length	Hexagonal Details	
		Diameter 'C'	Length 'D'	Min-Max 'A'		'E'	'Flats'
0538-00	*00-20ss	M20	15	3.0-8.0	33	28	31.5
0538-0	*0-20s	M20	15	7.0-11.0	33	30	33.5
053801	*1-20	M20	15	11.0-14.5	37	34	36.5
053802	*2-25	M25	15	14.5-20.5	40	42	48.5
053803	*3-32	M32	15	20.0-26.5	50	52	58.0
053804	4-40	M40	20	26.0-34.5	57	62	67.5

All dimensions are in mm. *For use with Handi-Fit boxes.
For Sizes larger than 4-40 use Posi Grip Glands Leaflet G070703.