




Assembly Diagram Cat No. FFOB-142/143

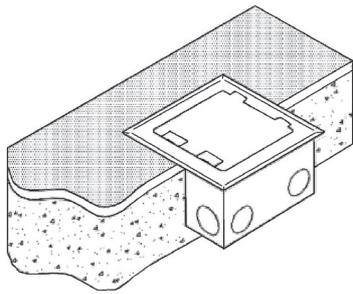

FFOB-142 :
Brass look lid
Bevelled Edge
2 Auto switched 10Amp GPOs
125mm x 135mm x 65mm

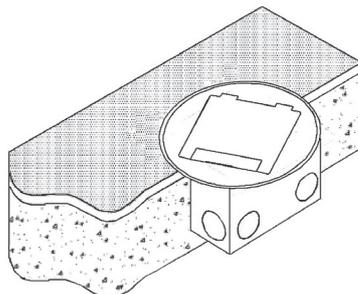

FFOB-143R :
Stainless Steel Round lid
Bevelled Edge
2 Auto switched 10Amp GPOs
125mm x 135mm x 65mm

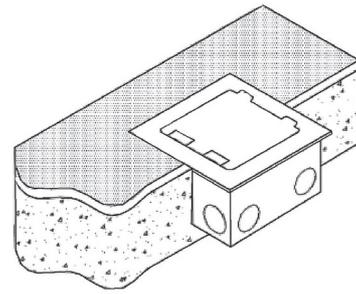

FFOB-143F :
Stainless steel lid
Flush Fitting Edge
2 Auto switched 10Amp GPOs
125mm x 135mm x 65mm

FFOB-143 :
Stainless Steel lid
Bevelled Edge
2 Auto switched 10Amp GPOs
125mm x 135mm x 65mm

Features:

Hinged cover 145mm x 145mm, screw fixes to steel box body.


2 x Cord outlet flaps – fold down when in use to allow cords out with main cover closed.

Temporary lid – secure to body during concrete pour to prevent ingress of slurry.


Steel Box Body 126mm x 135mm x 65mm (nom.) deep has 5 of 25mm conduit knock-outs – feeding bracket. (4 on sides of box and 1 on the base).

Outlet Bracket to 2x autoswitched power outlet.

Block-out in concrete slab 155mm x 155mm x 75mm (nom.)
Cut-out in raised floor 128mm x 138mm (nom.).



Assembled side view
FFOB - 142 and FFOB - 143
single compartment format
showing cord outlet flap
in use.

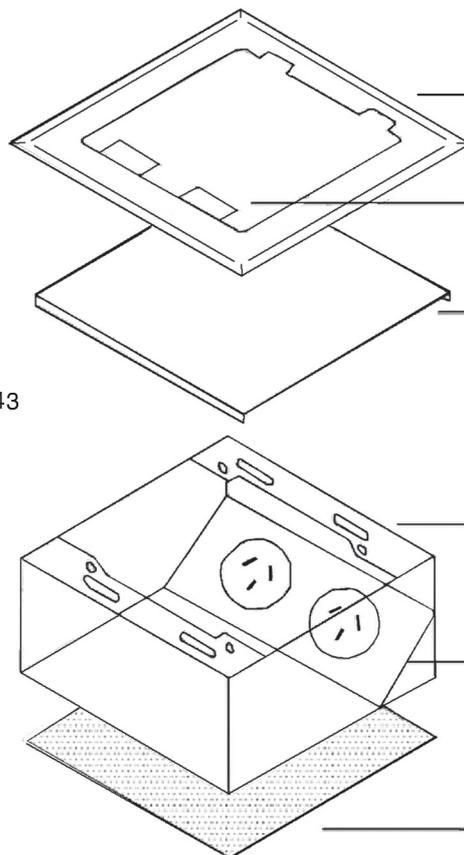

All dimensions quoted are nominal only. Drawings, images and text are for illustrative purposes only and product details and dimensions are subject to change without notice

This product is not suitable for use in wet areas, is intended for use with fixed wiring only and must be installed by a licensed Electrical Mechanic in accordance with AS 3000, SAA Wiring Rules and Austel requirements.



CableDuct
Systems

CableDuct Systems Pty Ltd

T : 08 9204 4444

F : 08 9204 4455

www.cableduct.com.au

For Safe & Effective
Cabling Solutions

