
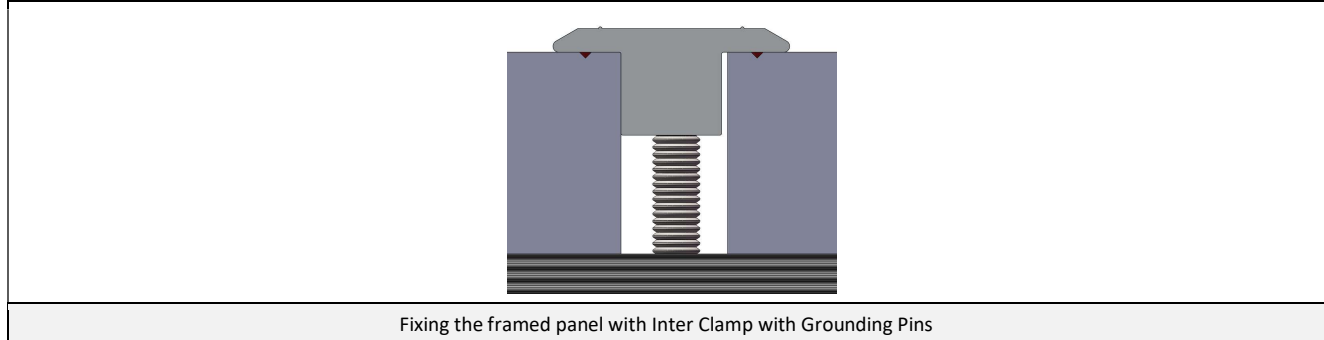
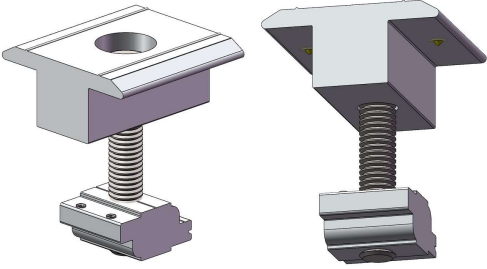


Inter Clamp Standard 30 and 35 mm with Grounding Pins


Assembly

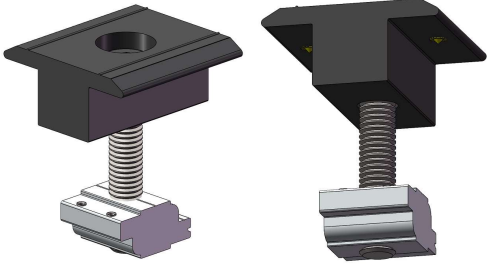

Component

	
Inter Clamp with Grounding Pins Part No.: ER-IC-ST30/G (bar code: 13-11010-044) Part No.: ER-IC-ST35/G (bar code: 13-11010-045)	Inter Clamp with Grounding Pins, black anodized Part No.: ER-IC-ST30B/G (bar code: 13-11010-058) Part No.: ER-IC-ST35B/G (bar code: 13-11010-059)

Technical Specification

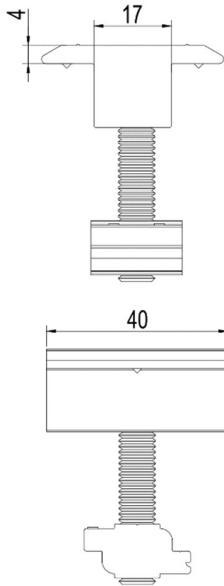Application	ER-IC-ST30/G and ER-IC-ST30B/G is for framed PV Modules of 24-31mm (with ECO-Rail) / 26-31mm (with T-Rail) in height ER-IC-ST35/G and ER-IC-ST35B/G is for framed PV Modules of 29-36mm (with ECO-Rail) / 31-36mm (with T-Rail) in height	
Requirement	Needs 18mm space between PV Modules	
Recommended Torque	16-20N•m	
Weight	ER-IC-ST30/G and ER-IC-ST30B/G: 0.068 Kg ER-IC-ST35/G and ER-IC-ST35B/G: 0.070 Kg	
Packaging	ER-IC-STXX/G: 100 units per pack, 4 packs (400 units) per carton ER-IC-STXXB/G: 45 units per pack, 4 packs (180 units) per carton	
Material	Main Structure: AL6005-T5 Fasteners: SUS 304	
Finish	ER-IC-STXX/G: Silver anodized, no less than 10 μm (excluding machine surfaces) ER-IC-STXXB/G: Black anodized, no less than 10 μm (excluding machine surfaces)	