



Main Benefits

- Quick and Easy Installation
- Versatile Klip-lok Interface

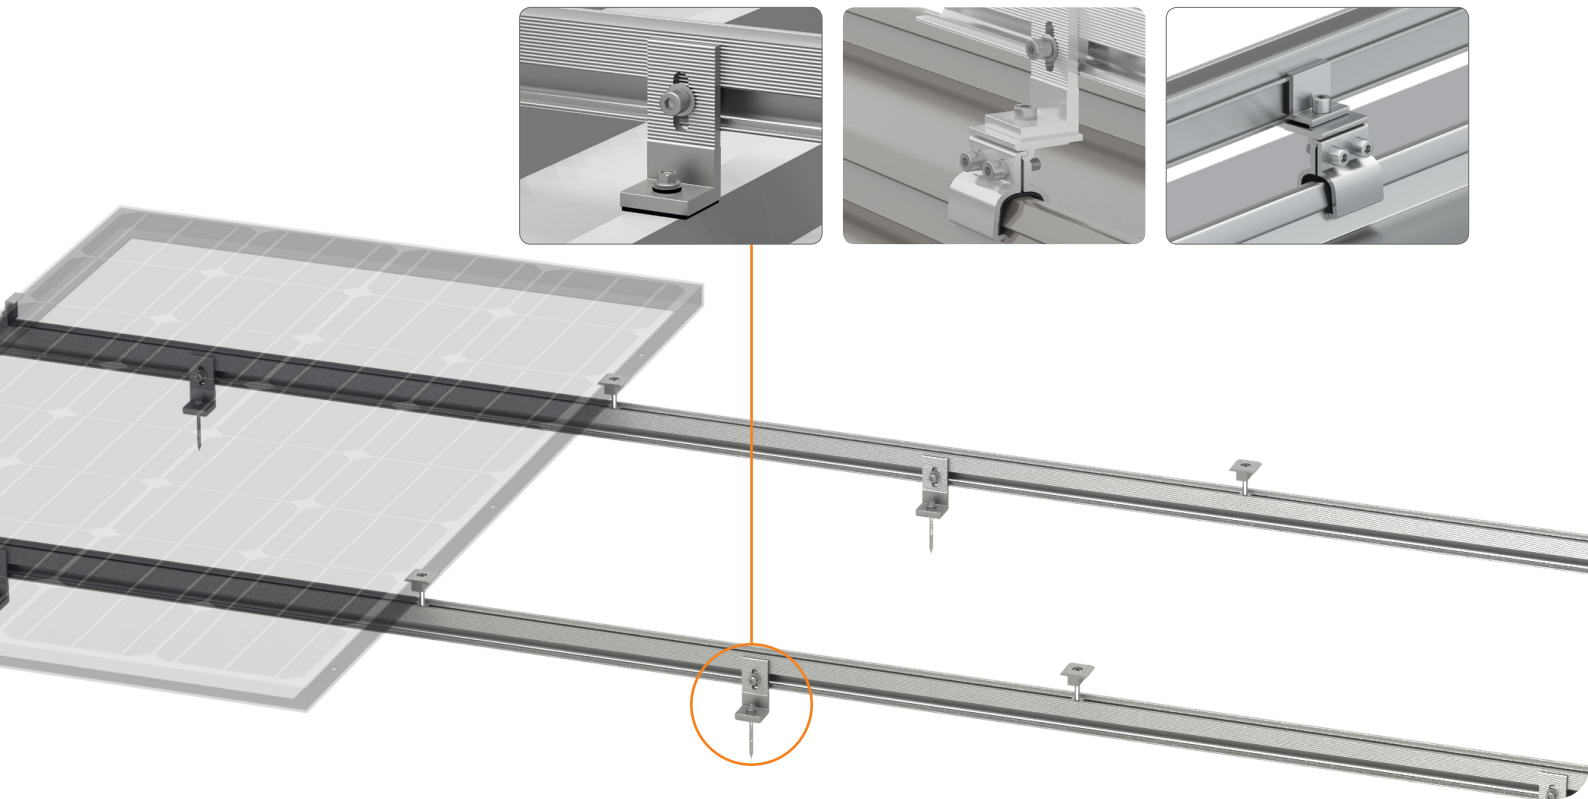

Item	Part Number	Description	Torque (N.m.)
1	ER-EC-ST35	PV-ezRack End Clamp, Standard 35mm	M8: 16-20 N.m.
2	ER-IC-ST35/U18	PV-ezRack Module Inter Clamp, Standard, for Frame Height 32-35mm with 18mm U-shape profile	M8: 16-20 N.m.
3	ER-SP-ECO/150	PV-ezRack Splice for ECO Rail 150mm	M8: 10-12 N.m.
4	All Kliplok	PV-ezRack SolarRoof, Interface for Standing Seam 20 Klip- Lok Roofs(with threaded hole)	M8: 16-20 N.m.
5	L feet on kliplok	PV-ezRack SolarRoof, Tin Interface with M8x28 Bolt and for Threaded Holes	M8: 16-20 N.m.
6	EZ-GL-STII	PV-ezRack Grounding Lug II	M8: 16-20 N.m. M6: 5-6 N.m.



ER-EC-ST30/35/40/45
End Clamp



ER-IC-ST35(40)/U18
Inter Clamp



CRC-R/ECO
Cross Connector Clamp of ECO-
Rail without Bolt




ER-R-ECO/4200/5200
ECO Rail



ER-SP-ECO
Splice for ECO Rail



I-05-8/28/TH
Tin Interface with M8x28-Bolt



I-05/6.3/85/CS
Tin Interface with Carbon Steel Self-drilling Screw 6.3x85 for metal purlin




ER-I-05/HB/MP
Tin Interface M8x150 SUS304 with Blue White Zinc Coating



ER-I-51/SM6.3/25
Tile Interface



ER-I-13-TH
Klip-lok Interface for Hidden 26



ER-I-16-TH
Klip lok interface for standing seam 22



ER-I-18-TH
Interface for Standing Seam 20



ER-I-20A-TH
Klip-lok interface for Angularity 18A



ER-I-31/45/M8
Klip-lok Interface 400-700HS




ER-I-32/45/M8
Klip-lok Interface 406 with U-opening



ER-TL-10/15/6.3/85
Tilt legs, adjustable 10-15 degree



TL-10/15/L/PS/6.3/85
Tilt Leg with L-feet, Adjustable, 10-15 Degree, Pre-assembled



EZ-GL-STII
Grounding Lug II



EZ-GC-ST
Grounding Clip



EZ-CC-PV/2
Universal Cable Clip for PV Panels for holding 2 cables



CC-R/ECO/6
AL Cable clip for ECO rail



Distributor Outlets



Clenergy Thailand

9/2, 5th Floor, Vorasin Building, Soi Yasob 2, Viphavadee-Rungsit Road, Chomphon Sub-district, Chatuchak District, Bangkok 10900
Tel: +66 (0) 2 277 5201, +66 (0) 6 3228-0200
E-mail: sales_th@clenergy.com, support_th@clenergy.com
www.clenergythailand.com

Check out our SolarRoof ECO rail system installation video:

Residential Solar Project: <https://youtu.be/8YnbLzo7Mtk>
Commercial Solar Project: <https://youtu.be/6FFYZJwNBDw>

Material AL6005 T5 anodised 10-12 micron.

A full standard pallet for parts is 1200*1100*1800mm
A full standard pallet for 4.2m rails is 4200*1100*1000mm
A full standard pallet for 5.2m rails is 5200*1100*1000mm