

# BARE EMERGENCY



## Steel Batten Range at the Right Price

The Bare Emergency batten range has been designed as an ideal solution for projects or applications where a non-maintained emergency light is required to cover existing paint lines of a traditional batten.

Available in EL, LP or L10 featuring lithium battery technology and CTP, DALI or Zoneworks® XT Hive testing options.

### Applications



Office buildings



Corridors



Galleries



Back of House



Schools



### Features and Benefits

- AS/NZS 2293.3 compliant
- Lithium Iron Phosphate Battery
- Zoneworks® XT Hive or DALI test options in LP Premium and L10
- Clevertest Plus System compatible



# BARE EMERGENCY

## BARE EMERGENCY 600MM

ORDERING INFORMATION		EL	LP	L10
Nominal Size		600mm	600mm	600mm
TEST OPTIONS   PART NO.	Standard	EBS2N-LI	CBS2N	LBS2N
	Motion Sensors	No		
	CTP System Compatible	No	Yes	
	DALI	-	CBS2N-DALI	LBS2N-DALI
	Zoneworks® XT Hive	-	CBS2N-HV	LBS2N-HV
Carton Quantity		1		
Weight - single (carton)		1.3kg	1.6kg	1.6kg
Dimensions (L X W x H)		611mm x 111mm x 54mm		

TECHNICAL SPECIFICATIONS		EL	LP	L10
Construction - Base		Powder Coated Steel		
Voltage (V) (Frequency (Hz))		220-240V (50Hz)		
Power Consumption ♦ (Standby / Max)		0.4W / 1.3W	1.0W / 3.9W	1.3W / 3.0W
Lamp		1 x LED Lifelight (Lifetime warranty on the lamp head and loom assembly)		
Operating Temperature		1°C to 40°C		

♦ Please refer to the specific product data sheet for actual power, light output, lamp lifetime and driver values.

EMERGENCY SPECIFICATIONS		EL	LP	L10
Operating Mode		Non-Maintained		
Battery Configuration		Integral		
Battery Type		Lithium Iron Phosphate		Lithium Nanophosphate®
Voltage / Capacity (mAh)		3.2V / 3000mAh	3.2V / 3200mAh	3.3V / 2500mAh
Charging Method		Intelligent Current Limited Constant Voltage		

CLASSIFICATION	EL	LP	L10
Co	D40		D63
C90	D40		D63

SPARE PARTS	EL	LP	L10
Battery	1560150	1550010	1530010

# BARE EMERGENCY

## BARE EMERGENCY 1200MM

ORDERING INFORMATION		EL	LP	L10
Nominal Size		1200mm	1200mm	1200mm
TEST OPTIONS   PART NO.	Standard	EBS4N-LI	CBS4N	LBS4N
	Motion Sensors	No		
	CTP System Compatible	No	Yes	
	DALI	-	CBS4N-DALI	LBS4N-DALI
	Zoneworks® XT Hive	-	CBS4N-HV	LBS4N-HV
Carton Quantity		1		
Weight - single (carton)		1.3kg	1.6kg	1.6kg
Dimensions (L x W x H)		1219mm x 111mm x 54mm		

TECHNICAL SPECIFICATIONS		EL	LP	L10
Construction - Base		Powder Coated Steel		
Voltage (V) (Frequency (Hz))		220-240V (50Hz)		
Power Consumption ♦ (Standby / Max)		0.4W / 1.3W	0.4W / 4.7W	0.4W / 2.2W
Lamp		1 x LED Lifelight (Lifetime warranty on the lamp head and loom assembly)		
Operating Temperature		1°C to 40°C		

♦ Please refer to the specific product data sheet for actual power, light output, lamp lifetime and driver values.

EMERGENCY SPECIFICATIONS		EL	LP	L10
Operating Mode		Non-Maintained		
Battery Configuration		Integral		
Battery Type		Lithium Iron Phosphate		Lithium Nanophosphate®
Voltage / Capacity (mAh)		3.2V / 3000mAh	3.2V / 3200mAh	3.3V / 2500mAh
Charging Method		Intelligent Current Limited Constant Voltage		

CLASSIFICATION	EL	LP	L10
Co	D40	D63	
C90	D40	D63	

SPARE PARTS	EL	LP	L10
Battery	1560150	1550230	1530230

# BARE EMERGENCY


**SPACING TABLE AND MOUNTING HEIGHTS – AS/NZS 2293.1:2018 (MINIMUM LIGHT LEVEL OF 0.2 LUX)**

Classification	2.1m	2.4m	2.7m	3.0m	3.3m	3.6m	4.0m	4.5m	5.0m	6.0m	7.0m	8.0m
D40	11.5	13.2	14.8	16.5	18.1	19.5	20.1	20.7	21.2	22.1	22.6	23
D63	11.5	13.2	14.8	16.5	18.1	19.8	22	24.5	25.2	26.4	27.3	28


For 1 lux and AS/NZS 2293.1:2005 spacing tables please visit: <https://clevertronics.com.au/spacing-tables/>

\*Warranty information located at: <https://clevertronics.com.au/warranty-statement/>

## 600mm/2ft no pod

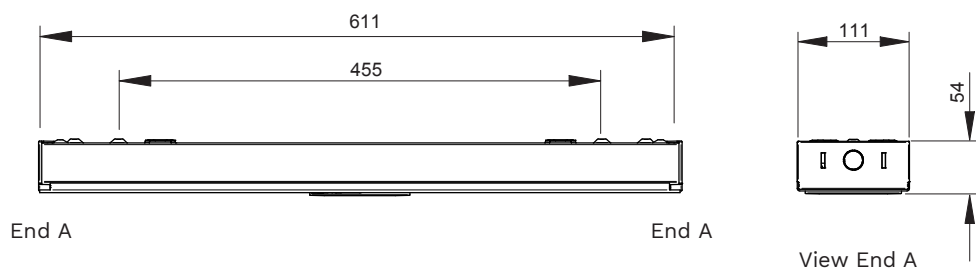

## 1200mm/4ft no pod

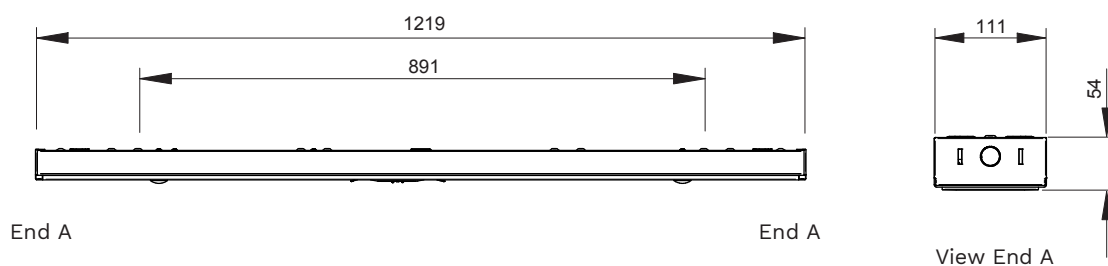

**clevertronics.co.nz**  
**clevertronics.com.au**

195 Chesterville Road, Moorabbin VIC 3189  
P +61 3 9559 2700 F +61 3 9559 2799 E [info@clevertronics.com.au](mailto:info@clevertronics.com.au)

Clevertronics is committed to continuously improving its products.  
All features and specifications are subject to change without prior notice.  
CT-BRO-ANZ-ODQBARE-BA-001