

# WEATHERPROOF UNIVERSAL EXIT

## Weatherproof and Easy to Install


The Weatherproof Universal Exit offers a cost effective solution for applications that require an IP66/67 rated exit. Mounting can be either wall or ceiling with the option of single or double sided decals. Built with a polycarbonate clear cover and nylon base that is tested to an impact rating of IK10 it is easy to see why it is a popular choice for weatherproof applications.

### Applications



### Features and Benefits

- AS/NZS 2293 compliant
- Wall or ceiling mount
- All directional decals in one box
- Lithium Iron Phosphate or Nanophosphate® battery
- Clevertest Plus System compatible
- Theatre version available

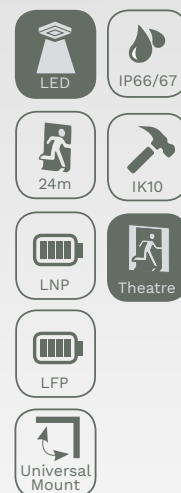

# WEATHERPROOF UNIVERSAL EXIT

PART NO.	ORDERING INFORMATION	EL ECONOMY	LP PREMIUM	L10 NANOPHOSPHATE®
	Standard / Self-Test Capable	EWELED-LI	CWELED	LWELED
	Clevertest Plus System Compatible	No	Yes	Yes
	Digital Addressable Lighting Interface	-	CWELED-DLI	LWELED-DLI
	Zoneworks®	-	CWELED-ZW	LWELED-ZW
	Classic version	-	-	LCWELED-R
	Carton Quantity	4		
	Weight - Net (Gross)	2.8kg (11.2kg)		
	Dimensions (L x W x H)	410mm x 100mm x 272mm		
	Directional Options	All Directional Inserts Included (Excluding theatre versions)		

POWER, LAMPS AND BATTERY	EL ECONOMY	LP PREMIUM	L10 NANOPHOSPHATE®
Power Consumption (Standby/Max)	1.1W / 2.0W	2.7W / 5.1W	
Lamp(s)	50,000 Hours LEDs	100,000 Hours LEDs	
Battery	Lithium Iron Phosphate		Lithium Nanophosphate®
Voltage (V)/Milliamp Per Hour (mAh)	3.2V/600mAh	3.2V/1500mAh	3.3V/2500mAh
Charging Method	Intelligent Current Limited Constant Voltage		

TECHNICAL SPECIFICATIONS	
Operating Mode	Maintained
Voltage (V) Frequency (Hz)	220-240V(50Hz)
Construction	Cleverfit Inside Glass Reinforced Nylon Base and PC Cover
Viewing Distance	24m
Mounting Type	Wall and Ceiling (Single and Double Sided)
Operating Temperature	0°C to 40°C
Ingress Protection Rating (IP)	IP66/67
Impact Rating (IK)	IK10

SPARE PARTS	EL	LP	L10
Battery	1550195	1550190	1530090
Lamp Bar	8002900	8002120	8002430
Clevertest Node	N/A	8002185	8002185
Zoneworks® Node	N/A	8001450	8001450
DLI Node	N/A	8002200	8002200
Diffuser	2710140	2710140	2710140


ACCESSORIES	EL	LP	L10
Cantilever Bracket	CLVBRT-CF-WP	CLVBRT-CF-WP	CLVBRT-CF-WP

CLASSIFICATION	EL	LP	L10
Co	E2	E2	E2
C90	E1.6	E2	E2

AS2293 SPACING TABLE AND MOUNTING HEIGHTS								
Classification	2.1m	2.4m	2.7m	3.0m	3.3m	3.6m	4.0m	5.0m
E1.6	4.8	4.8	4.8	4.4	4.0	4.2	3.8	-
E2	5.2	5.2	5.4	5.2	5.0	4.6	4.8	-

\*Warranty information located at: <https://clevertronics.com.au/warranty-statement/>

Based on minimum light level of 0.2 lux.  
Maximum allowed mounting height is 2.7m  
but for exceptions see AS/NZS 2293.1.

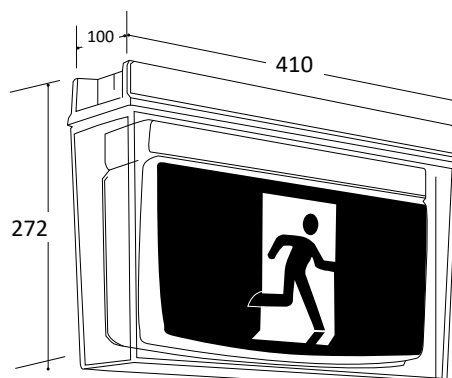

Dimensions (mm)

**clevertronics.co.nz**  
**clevertronics.com.au**

195 Chesterville Road , Moorabbin VIC 3189  
P +61 3 9559 2700 F +61 3 9559 2799 E [info@clevertronics.com.au](mailto:info@clevertronics.com.au)

Clevertronics is committed to continuously improving its products.  
All features and specifications are subject to change without prior notice.  
CT-BRO-ANZ-WEATHERPROOF-UNI-EX-001