


# Fittings - TWAB Terminator® Cable Glands

## Technical Data

Zone 1	Zone 2	Zone 21/22
<b>Type of Protection</b> Ex d, Ex e, Ex tD		
<b>Degree of Protection</b> IP66/67		
<b>Gas Group</b> IIC		
<b>Approvals</b> IEC Ex TSA09.0024		
<b>Application</b> Termination of steel wire armoured cables		
<b>Standard Materials</b> Brass, nickel plated		
<b>Options</b> Stainless steel (add suffix SS to part no., minimum order qty's applicable) Other thread types available upon request		

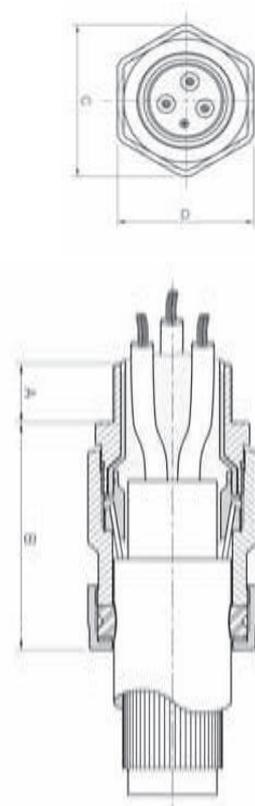

## Ordering Details

Gland Size Data				Cable Range Detail					Gland Size Data			
Catalogue No.	Entry Size	Catalogue No.	Entry Size	Actual Diameter (mm)				Wire Armour Diameter (mm)	Approx (mm)		Hexagon Size (mm)	
				Under Armour		Overall			Entry Length	Projected Length	Across Flats	Across Cnrs
Cat. No.	Metric	Cat. No.	NPT	Min	Max	Min	Max	Min/Max	A	B	C	D
TWAB1M13	20	TWAB1N13	1/2"	6	8	7	13.2	0.9/1.25	14	56	23.3	26
TWAB1M16	20	TWAB1N16	1/2"	6	8	10.2	15.8	0.9/1.25	14	56	27	31
TWAB1M20	20	TWAB1N20	1/2"	7	12	15.5	20.8	0.9/1.25	14	56	30.5	35.2
TWAB2M27	25	TWAB2N27	3/4"	11	18	20	27.2	1.25/1.6	16	56	38.5	44.5
TWAB3M34	32	TWAB3N34	1"	17	25	27	33.5	1.6/2	20	66	47.6	54
TWAB4M40	40	TWAB4N40	1 1/4"	24	31	32	39.9	1.6/2	20	71	55	65.8
TWAB5M53	50	TWAB5N53	1 1/2"	30	41	43	52.6	2/2.5	20	75	70	80.8
TWAB6M66	63	TWAB6N66	2"	40	54	53	65.3	2/2.5	22	85	80	92.4
TWAB7M78	75	TWAB7N78	2 1/2"	53	65	63	78	2.5/3.15	24	100	101	116.6
TWAB8M88	85	-	--	60	74	77	88	2.5/3.15	24	100	111	122