

EV-MERCURY-B

Mercury Professional Emergency Exit, 24m

FEATURES

- Single and double sided decals
- Soft-start charger to reduce building load
- Available in low illumination area black model
- IP65 Weatherproof Case available but not included
- Fast emergency switch-over (<0.5s) for high-task areas
- Wall, ceiling, chain and rod mounting (with Rod Mount Kit)
- Long life electronics
- 10 years design life at max. ambient
- High Quality Lithium battery (LiFePO4) and smart charger
- Standalone (SPU)
- Self test (AS2293/ IEC62034)
- IEC62386 over IEC62386-104
- Ektor wired monitored system



ORDERING INFORMATION

Order code	03136
Description	Mercury Emergency Exit - Black
Driver Type	DALI DT1 Emergency
Item Code	EV-MERCURY-B

MECHANICAL

Body Material	Polycarbonate
Diffuser Material	Polycarbonate
Fitting Colour	Black
Installation Type	Wall or Ceiling
IP Rating	IP20

ELECTRICAL

Electrical Rating	Class II
Input Frequency	50 Hz
Input voltage	230Vac
In Australia the Input voltage is defined as 230Vac -6%/+10%. This effectively means that the voltage range of these products are 216Vac - 253Vac or 240V +6%	
Maximum Wattage	4.5 W
Standby Power	3 W

Standby power for non-maintained/switched maintained emergency devices is measured when the light is off and the charger is in standby mode. For maintained emergency devices, standby power is measured when the light is on and the charger is in standby mode. Typically, charging occurs for the first 16

hours after the device is powered or after a battery discharge.

Working Temp Range	0 to 40 °C
---------------------------	------------

COLOUR TEMPERATURE

LED Wattage	1.5 W
--------------------	-------

DRIVER

Dimmable	No
Driver Included	Yes
Driver Type	DALI DT1 Emergency
Wiring Type	Re-wireable terminal block (5 pin)

EMERGENCY (EM SUFFIX)

Replacement Battery Code	01300
Emergency Control	DALI Monitored (DT1)
DALI Monitored ~ Supports Emergency test and monitoring over DALI (IEC62386) with full compliance to IEC62386-202.	
Decal Size	300 x 150 mm
Emergency Duration	90 mins
Emergency Mode	Maintained
Emergency Output Power	1500 mW

Viewing Distance 24 m

COMPLIANCE

Product Design Life 10 years

The product design life relates to the total product life which includes LEDs, drivers and the enclosure. This is different to the LED lifetime which only refers to the economical lifetime of the LEDs at which time the lumen output has dropped below the L Value. The product design life is calculated at the maximum ambient or working temperature of the product and takes into account the Daily Use.

Standards AS/NZS 60598.1
 AS 60598.2.22
 AS/NZS 61347.1
 AS/NZS 61347.2.13
 AS CISPR 15
 AS/NZS 2293.3

WARRANTY


Commercial Use Warranty 5 RTB (Total 5 Years)

DIMENSIONS

Product Height 326 mm
Product Length 211 mm
Product Width 80 mm

LINE DRAWINGS

EV/MERCURY

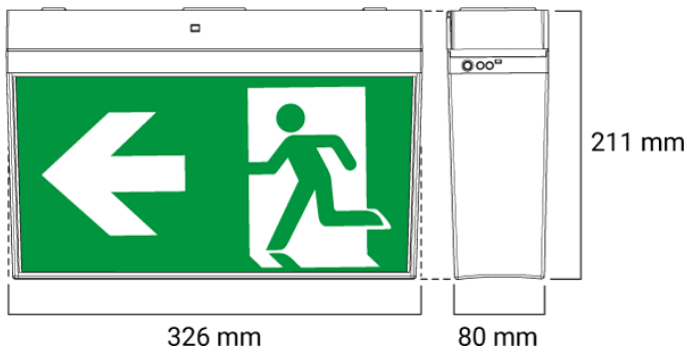

PHOTOMETRICS

EV/MERCURY_03135_2hr

