

**Tube terminals 0.75 - 10 mm²**

■ Data: Cu 99.95%, tin plated

■ Cable inspection hole, for flexible (class5) and stranded (class 2) Cu conductors.

■ UL-approved (1-10 mm²).Marking example KR: 10 10 10 = mm² 10 = palm hole for M10


AWG	mm ²	Cat. no.	Screw	mm W	d	t	L	s	Pcs/ pack	Rec. tool
(22)-18	0,75	KR0,75-3*	M3	6,0	1,3	0,8	16,0	7	100	DKB0325, DKB0760
(22)-18		KR0,75-4*	M4	6,0	1,3	0,8	17,0	7	100	DKB0325, DKB0760
(18)-16	1,5	KR1,5-3*	M3	6,5	1,8	1,0	16,0	7	100	DKB0325, DKB0760
(18)-16		KR1,5-4*	M4	6,5	1,8	1,0	17,0	7	100	DKB0325, DKB0760
(18)-16		KR1,5-5*	M5	7,5	1,8	0,8	18,0	7	100	DKB0325, DKB0760
(16)-14	2,5	KR2,5-3*	M3	7,5	2,3	1,3	17,0	8	100	DKB0325, DKB0760
(16)-14		KR2,5-4*	M4	7,5	2,3	1,3	18,0	8	100	DKB0325, DKB0760
(16)-14		KR2,5-5*	M5	8,5	2,3	1,2	19,0	8	100	DKB0325, DKB0760
(16)-14		KR2,5-6*	M6	8,5	2,3	1,1	19,0	8	100	DKB0325, DKB0760
12	4	KR4-4	M4	8,5	3,0	1,5	21	9	100	GWB4099, ES2258
12		KR4-5	M5	9,0	3,0	1,5	22	9	100	GWB4099, ES2258
12		KR4-6	M6	10,0	3,0	1,4	23	9	100	GWB4099, ES2258
10	6	KR6-4	M4	9,5	4,0	1,7	22	9	100	GWB4099, ES2258
10		KR6-5	M5	9,5	4,0	1,7	22	9	100	GWB4099, ES2258
10		KR6-6	M6	10,0	4,0	1,6	23	9	100	GWB4099, ES2258
10		KR6-8	M8	13,0	4,0	1,2	30	9	100	GWB4099, ES2258
8	10	KR10-5	M5	11,5	5,0	3,0	29	11	100	GWB4099, ES2258
8		KR10-6	M6	11,5	5,0	3,0	29	11	100	GWB4099, ES2258
8		KR10-8	M8	13,5	5,0	2,2	33	11	100	GWB4099, ES2258
8		KR10-10	M10	16,0	5,0	2,0	34	11	100	GWB4099, ES2258
8		KR10-12	M12	19,0	5,0	1,7	41	11	100	GWB4099, ES2258

t = palm thickness s = strip length

* without inspection hole

Fork terminals 0.25 - 10 mm²

■ Data: Cu 99.95%, tin plated, brazed necks.

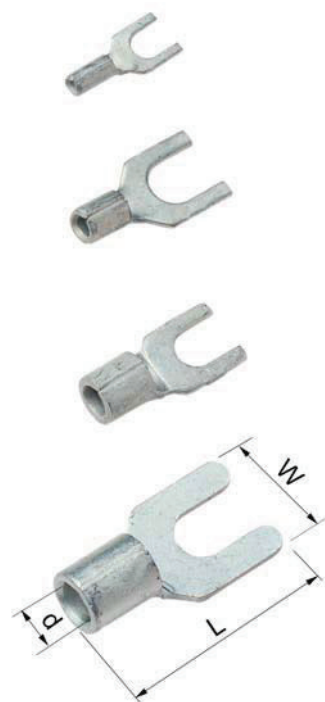

mm ²	Cat. no.	Screw	mm W	d	t	L	s	Pcs/ pack	Rec. tool
0,25-0,75	B0832G	M3	5,5	1,3	0,5	13,0	7	100	DKB0325
	B0843G	M4	7,5	1,3	0,5	16,2	7	100	DKB0325
0,75-1,5	B1532G	M3	5,5	1,8	0,7	13,0	7	100	DKB0325, DKB0760
	B1537GS	M3,5	5,5	1,8	0,7	16,2	7	100	DKB0325, DKB0760
	B1543G	M4	7,0	1,8	0,7	16,2	7	100	DKB0325, DKB0760
	B1553G	M5	9,0	1,8	0,7	17,0	7	100	DKB0325, DKB0760
1,5-2,5	B2532G	M3	5,5	2,3	0,8	13,0	8	100	DKB0325, DKB0760
	B2543G	M4	7,0	2,3	0,8	16,2	8	100	DKB0325, DKB0760
	B2553G	M5	9,0	2,3	0,8	17,0	8	100	DKB0325, DKB0760
4-6	B4643G	M4	7,8	3,4	1,0	18,0	9	100	DKB0760, GWB4099
	B4653G	M5	9,0	3,4	1,0	18,0	9	100	DKB0760, GWB4099
10	B9953G	M5	12,0	4,6	1,2	24	11	100	GWB4099
	B9965G	M6	11,0	4,6	1,1	23	8	100	GWB4099

t = palm thickness s = strip length

For detailed information regarding recommended tool, see tool section at the end of this chapter.