




- Recessed gimble ideal for highlighting area and items of interest, such as pictures and ornaments.

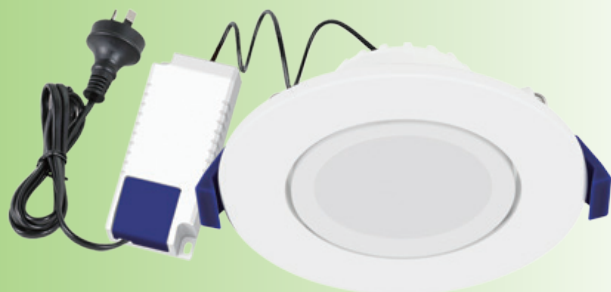

FEATURES

- Die-cast aluminium heat sink
- High efficiency SMD chips
- Constant current driver
- 40 degree gimble angle
- Opal polycarbonate diffuser
- CA135 Rating

DIMMING OPTIONS

- Trailing and Leading Edge
- Universal

INCLUDES

- Gimble LED downlight
- Dimmable LED driver
- 1.2 m flex and plug

APPLICATIONS

- Residential
- Hotels
- Shops
- Conference rooms
- Reception areas

WARRANTY

- Five years (subject to terms and conditions)

CERTIFICATION	IP RATING	DIMMABLE	DISTRIBUTION	DIMENSIONS(mm)
		leading and trailing edge		

Part No.	Voltage	Watt.	PF	CCT.	Ra	Lumen	Beam Angle	Lifetime L70B50	Fitting Colour
172007A	220-240V	11W	0.9	3000K	≥80	800lm	100°	35000h	White
172008A	220-240V	11W	0.9	4000K	≥80	850lm	100°	35000h	White
172077A	220-240V	11W	0.9	5000K	≥80	850lm	100°	35000h	White

Part No.	Model No.	Driver Model No.	VEET Status	IPART Status
172007A	YKRS3EA2G1W-D-11W	YKD12CC270D	Approved VEET No.: 5463	Approved IPART No.: 24143D12-1HJDGHF
172008A	YKRS3EA2G1W-D-11W	YKD12CC270D	Approved VEET No.: 5463	Approved IPART No.: 24143D12-1HJDGHF
172077A	YKRS3EA2G1W-D-11W	YKD12CC270D	Approved VEET No.: 5463	Approved IPART No.: 24143D12-1HJDGHF

[1] Operating Frequency=50/60Hz

[2] Switch Times≥20000

