

ORDERING INFORMATION

CODE	DESCRIPTION	PRODUCT NUMBER	CARTON QTY.	WEIGHT (NET/ GROSS)
I1190	Ledfire Basic Emergency Luminaire	9336462111901	4	-

OPERATIONAL INFORMATION


GENERAL				BATTERY	
Voltage (V)	~230V	Emergency Classification	D25	Battery Type	LiFePO4
Frequency (Hz)	50 Hz	Mounting Type	Recessed mounting	Battery Voltage	3.2 V
Max. Ambient Temp.	40°C	Wiring	Flex & Plug	Battery Code(s)	I307
Class	2	Lamp Power	1.5W (D25)		
Duration	90 / 120 min	Avg. Circuit Power	0.45 W	Charging Time	16 Hours
IP Rating	IP20	Max. Circuit Power	2 W	Charger Type	Variable

CONSTRUCTION AND DIMENSIONS

BODY	PC
DISH	PC
CUT OUT**	70 mm - 80 mm
CUT OUT*	75 mm - 130 mm

** Size without outer ring
* Size with outer ring

NOTE: For more information on the chemical resistance of our polycarbonate, please see the technical downloads page at ektor.com.au

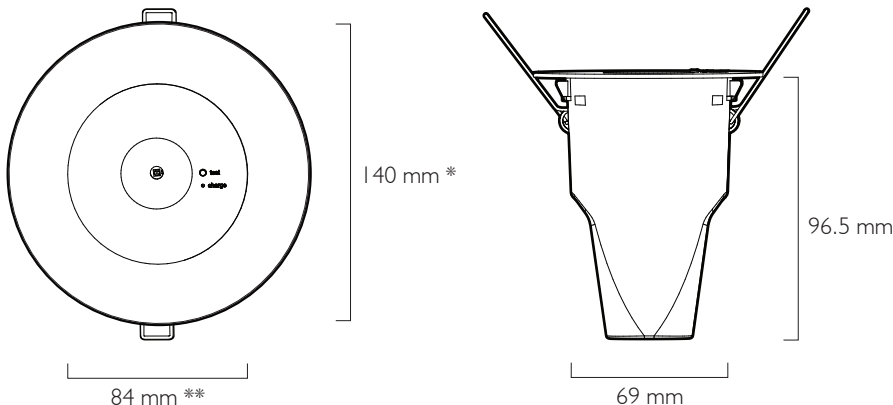

Top view dimensions: 84 mm ** (width), 140 mm * (height)

Side view dimensions: 69 mm (width), 96.5 mm (height)

ACCESSORIES AND SPARE PARTS

CODE	DESCRIPTION
I307	Battery 1500mAh 2 Cell LiFePO4

SPACING TABLE (DISTANCE BETWEEN FITTINGS)

LUX	CLASSIFICATION	MOUNTING HEIGHT (M)															
		2.1	2.4	2.7	3	3.3	3.6	4	4.5	5	6	7	8	9	10	15	20
0.2	D25	14.2	14.7	15.3	15.7	16.1	16.5	16.9	17.3	17.7	18.1	18.3	18.2	17.9	17.3	7.7	
0.5	D25	10.1	10.5	10.8	11.0	11.2	11.3	11.4	11.5	11.5	11.1	10.2	8.6	5.2			
1	D25	7.7	7.9	8.0	8.1	8.1	8.1	7.9	7.6	7.2	4.8	1.1					

Datasheet is subject to change without notice

Last updated: **24.February 2016**