

Garland's Pro Series range is the experts' choice for high quality cables.


Part No: TAW263WHBK

Description	Stranded 15AWG PACW, Figure 8 construction, PVC Insulation.
Applicable Standards	AS/NZS 1125, AS/NZS 3808
Suitable Applications	For the wiring of electronic and allied equipment, extension speakers, security system etc.

Cable Construction Drawing



Cable Construction Relative Parts

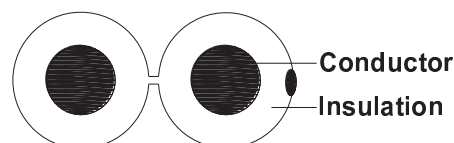

Cable Description

Conductor	AWG	Stranding	Area(mm ²)	Diameter(mm)	Material
	15	26/0.3	1.84	1.77	PACW
Insulation	Cores : 2 Material : PVC Colour : White/Black Stripe Nominal Thickness (mm) : 0.6 Nominal OD (mm) : 3.0 x 6.5				



Industrial / Power / Data / Security / Fibre

Garland's Pro Series range is the experts' choice for high quality cables.

Electrical Properties

Max. Conductor DC Resistance @ 20°C	10.05 Ω /km
Min. Insulation Resistance @ 20°C	50M Ω .km
Voltage Test: Conductor to core	2.0 kV ac/1min
Voltage Rating	ELV

Mechanical Properties

Operating Temperature Range	-15 to 70°C
Max. Recommended Pulling Tension	257N
Min. Bend Radius (install)	30mm
Approximate Mass	4.94kg/100m

Supply Information

Pack Size	Pack Type	Dimensions	Qty Per Carton	Cartons Per Pallet
100m	Plastic Reel	10 x 4.5 x 3.0"	4R	
500m	Wooden Reel	W33 x H21.8cm	1R	
1000m	Wooden Reel	W40 x H25.4cm	1R	

- Madison reserves the right to make changes to the products described in this specification without prior notice
- All values subject to factory tolerances

With Garland, you are always well connected.

Sales Enquiries **1800 66 99 99**
www.madisontech.com.au/garland

TAW263WHBK-150331.docx

