


ASTRO

ASTRO30W230R

SAP CODE: 2001947

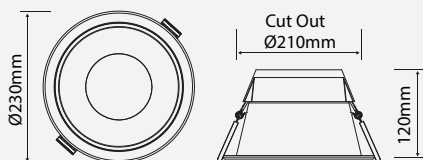


High Output Commercial Downlight

Deep recessed 24/32W High Output Tritone Downlight with remote driver and polished reflector.



Photometric Diagram



Unit: cd
— C0/180 55.0deg
— C90/270 55.2deg

KEY INFORMATION

Lumen Output	32W 24W	2850 / 3100 / 3000lm 2100 / 2300 / 2200lm
Input Power	32W, 24W	
Hole Cutout Size	Ø210mm	
Install	RECESSED	
Dimming Options	Non-Dimmable	
Fitting Colour	WHITE	
Warranty	4yr	
IP Rating	IP54	
IK Rating	N/A	
IC Rating	N/A	
Rebate Scheme Approvals	N/A	

PHOTOMETRIC

Efficacy	32W 24W	89 / 97 / 94lm/W 88 / 96 / 92lm/W
LED	SMD	
CCT	3000 / 4000 / 5700K	
CRI	>80	
Beam Angle	53	

ELECTRICAL

Driver	Remote	
Supply Input	220-240V, 50/60Hz	
Driver Output Voltage	45V DC	
Power Factor	>0.9	
LED Input Current (nominal)	700mA	
Useful life @Ta25° (L70)	50,000hr	

CONSTRUCTION

Housing	Aluminium 1070	
Optics	Polycarbonate Diffuser	
Adjustable Angle	N/A	
Fixings/Hardware	Rubberised Clip	
Connection Type	1m Flex & Plug	
Total Weight	0.83kg	
Dimensions	Ø230 x 120mm	
Operating Ambient Temp.	-20 to 40°C	
Electrical Classification	Class 2	