


Specifications

Version: 2.1


Hi-Lighter -2a

Version: 2.1							
Model No.	LTT19-020	LTT19-030	LTT19-050	LTT19-070	LTT19-090	LTT19-120	LTT19-150
Power Consumption	20±2W	30±3W	50±3W	70±4W	90±5W	120±6W	150±8W
LED Type	SEOUL SMD						
Luminous Flux (±5%)	2600lm	3900lm	6500lm	9450lm	12150lm	16200lm	20250lm
Efficacy (±5%)lm	130LM/W			135 LM/W			
Color Temperature	5000K (3000K, 4000K Optional)						
Color Rendering Index	Ra80 (Ra70 Optional)						
Beam Angle	R06302			R11201		R18401	
Power Supply	SOSEN						
Input Voltage	AC100-240V			AC200-240V			
Power Factor	≥0.90						
Frequency	50 / 60 Hz						
Surge Protection	6kV line-line, 10kV line-earth						
Driver Type	Constant Current (CC)						
Product Dimension	478×166×81mm			507.2*202.5*86.5mm		570.2*255.5*86.5mm	
Luminaire Net Weight	2.0±0.3kg		2.2±0.3kg	3.1±0.2kg		4.0±0.2kg	
Export Carton Size	534×205×125mm			578*245*152mm		640*300*152mm	
Gross Weight	2.5±0.3kg		2.7±0.3kg	3.9±0.2kg		4.9±0.2kg	
Material	Housing	Aluminum Alloy					
	Optics	Polycarbonate Optical Lens					
Finish	Powder Coating						
Fixture Color	silvery grey						
IP Rating	IP66 / WET Locations						
Mounting Option	Pole Mounting						
Operating Temperature	-30°C to + 50°C (-22°F to 122°F)						
Life Time	>50,000Hrs (Ta=30°C@L70)						
Warranty	5 Years						
Dimmable	Dimmable and Non-dimmable						
Control System	Photocell (Optional)						


Photometry

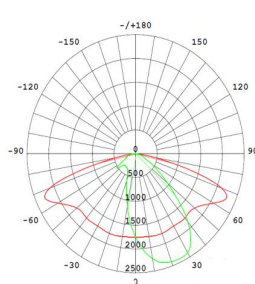

06302 (60x159°)
20W/30W/50W

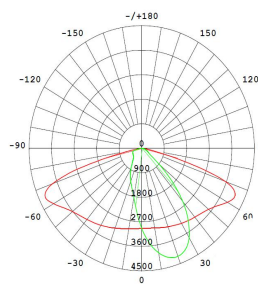


11201(50x150°)
70W/90W




18401 (65x164°)
120W /150W


Mounting Options

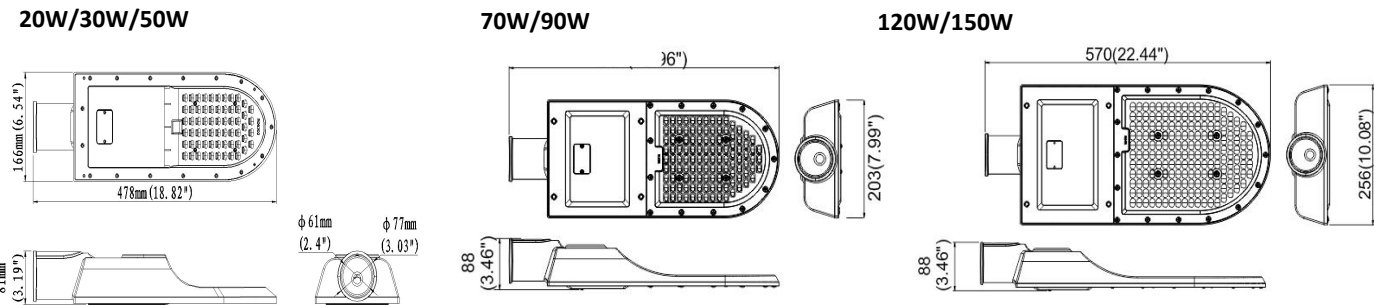

Photocell control

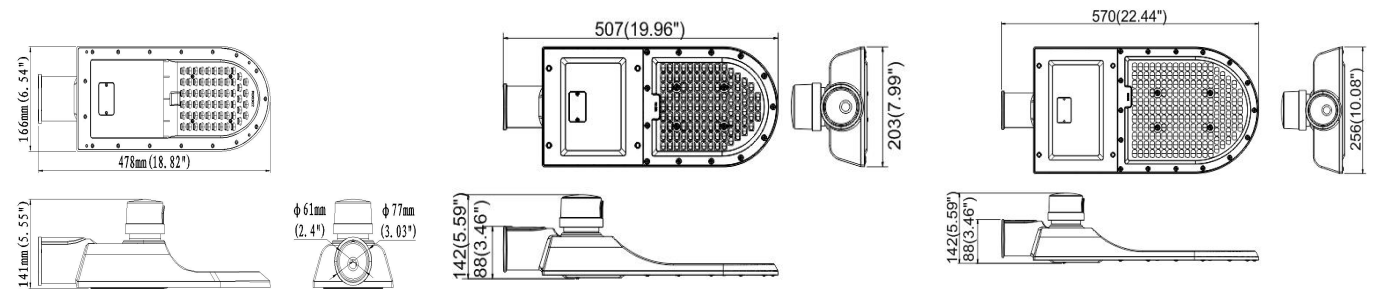

Mounting Options




Wall Mount Bracket



T Bracket



Pole Adaptor



L Bracket



Corner Mount