

Data Sheet

LED Satellite Surface Mount – D63



CAT NO. 659015LI, 659016LI



659015LI

Specifications		
Cat No	659015LI	659016LI
Finish	White	Black
Battery pack	Li-ion 6.4V, 3.0Ah	
Operating Voltage	240V a.c. +/- 6% 50Hz	
Power Consumption	2W	
Body Constructions	Polycarbonate	
Operating Temperature	10° to 40°	
IP Rating	IP20	
Compliance	AS/NZS 2293 AS/NZS 60598  	



GALAXY™
CONNECTED EMERGENCY LIGHTING SYSTEM



LED Satellite Surface Mount – D63




CAT NO. 659015LI, 659016LI

- Embedded Bluetooth for smart device connectivity
- Low Power Wide Area Network type of communications utilising the LoRa platform
- LoRa communication to maximise reliability, coverage and infiltration
- iSmart™ temperature sensing technology for the LIION battery
- Electronics designed to lengthen the life of the battery, minimising maintenance costs
- Environmentally friendly battery
- Easy to install
- One high Brightness LED
- 5 year warranty

Cat No	Description	Classification C ₀ /C ₉₀
659015LI	Galaxy LED Satellite Surface Mount White	D63
659016LI	Galaxy LED Satellite Surface Mount Black	D63

DIMENSIONS

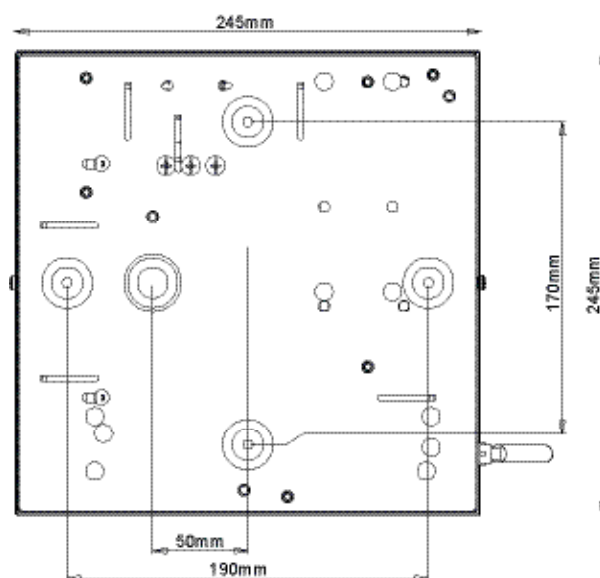



Spacing table:

Maximum spacings between luminaires for 0.2 lux (Australia)

Mounting Height (m)	2.4	2.7	3	3.3	3.6	4.0
A	20.3	21.1	21.8	22.4	23.0	23.7
B	20.3	21.1	21.8	22.4	23.0	23.7

Maximum spacings between luminaires for 1 lux (New Zealand)

Mounting Height (m)	2.4	2.7	3	3.3	3.6	4.0
A	11.4	11.8	12.1	12.3	12.5	12.7
B	11.4	11.8	12.1	12.3	12.5	12.7

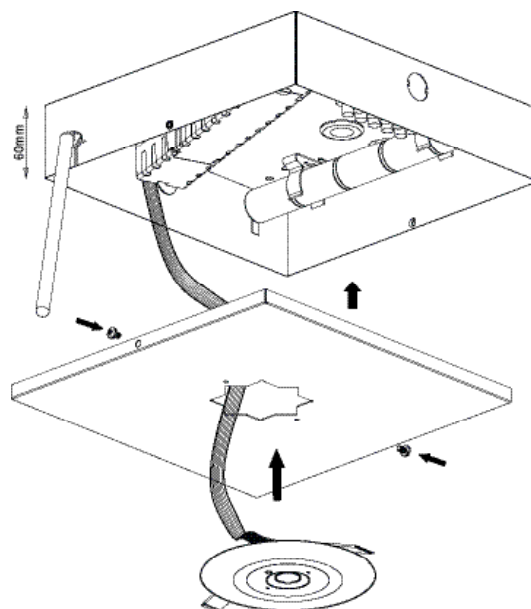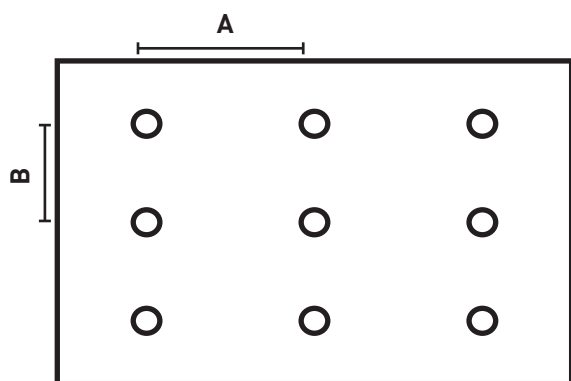

Legrand - Australia
1300 369 777
www.legrand.com.au
ABN 31 000 102 661

Legrand - New Zealand
0800 476 009
www.legrand.co.nz

Refer to your group buying office, Legrand Sales Representative or Legrand Sales Office for pricing.

Please note: specifications are subject to change without prior notice.