




- Material - Nylon 66
- Temperature Rating: -40°C to +80°C
- Flammability - U.L. 94V-2
- UV Stability - exceeds ASTM-D-4066 (15yrs normal UV exposure)
- Smooth rounded edges (will not cut insulation or hands)
- Closely spaced locking teeth permit fine adjustment
- No metal parts (head and pawl are integrally moulded)
- Bent tip allows for easier pick up, insertion and pull-up
- Material made in USA

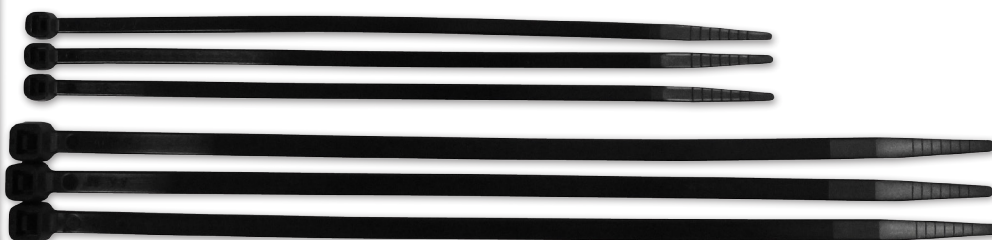

Code	Description	Min Ø	Max Ø	Rated Load	Packing	MOQ	Ctn
NCT-100/25B	100 x 2.5mm Black	3mm	21 mm	8kg	100/Pack	1 Pack	500
NCT-100/25N	100 x 2.5mm Natural	3mm	21 mm	8kg	100/Pack	1 Pack	500
NCT-150/32B	150 x 3.2mm Black	3mm	32 mm	18kg	100/Pack	1 Pack	200
NCT-150/32N	150 x 3.2mm Natural	3mm	32 mm	18kg	100/Pack	1 Pack	200
NCT-200/48B	200 x 4.8mm Black	3mm	50 mm	22kg	100/Pack	1 Pack	100
NCT-200/48N	200 x 4.8mm Natural	3mm	50 mm	22kg	100/Pack	1 Pack	100
NCT-250/48B	250 x 4.8mm Black	3mm	65 mm	22kg	100/Pack	1 Pack	100
NCT-300/48B	300 x 4.8mm Black	3mm	81 mm	22kg	100/Pack	1 Pack	80
NCT-300/48N	300 x 4.8mm Natural	3mm	81 mm	22kg	100/Pack	1 Pack	80
NCT-370/48B	370 x 4.8mm Black	3mm	104 mm	22kg	100/Pack	1 Pack	50
NCT-370/48N	370 x 4.8mm Natural	3mm	104 mm	22kg	100/Pack	1 Pack	50
NCT-450/76B	450 x 7.6mm Black	6mm	131 mm	55kg	100/Pack	1 Pack	20
NCT-450/76N	450 x 7.6mm Natural	6mm	131 mm	55kg	100/Pack	1 Pack	20
NCT-200/76B	200 x 7.6mm Black	6mm	50 mm	55kg	100/Pack	1 Pack	50
NCT-370/76B	370 x 7.6mm Black	6mm	104 mm	55kg	100/Pack	1 Pack	50
NCT-540/76B	540 x 7.6mm Black	6mm	159 mm	55kg	100/Pack	1 Pack	10
NCT-750/90B	750 x 9mm Black	9mm	227 mm	80kg	100/Pack	1 Pack	10
NCT-810/90B	810 x 9mm Black	9mm	245 mm	80kg	100/Pack	1 Pack	10
NCT-810/90N	810 x 9mm Natural	9mm	245 mm	80kg	100/Pack	1 Pack	10
NCT-1220/90B	1220 x 9mm Black	79mm	376 mm	80kg	100/Pack	1 Pack	5
NCT-1220/90N	1220 x 9mm Natural	79mm	376 mm	80kg	100/Pack	1 Pack	5