

Super M




- Sound output 127dB @ 1m
- Continuous rating
- Weatherproof (when mounted with rotor end down)

Order Code	Voltage	Current
SECXSM110	110VAC/DC	3.4A
SECXSM240	240VAC/DC	2.0A

Specifications:

Sound output: 127dB @ 1m (240V)
Sound frequency: 1600 Hz
Protection: IP55 (when mounted with rotor end down)
Rating: Continuous
Voltage tolerance: $\pm 10\%$
Temperature range (°C): -30 to +45
Cable Entry: Through base
Construction: ABS
Weight: 1.8Kg

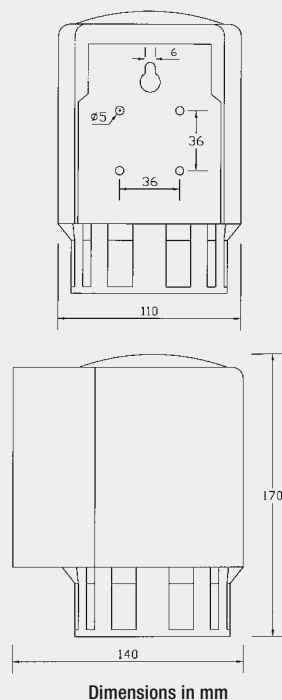

S04



- Sound output 125dB @ 1m
- Low penetrating tone
- Continuous rating
- Weatherproof
- Robust aluminium construction

Order Code	Voltage	Current	Sound Output
SEC1310	110VAC/DC	3.7A	125dB @ 1m
SEC1340	240VAC/DC	2.1A	125dB @ 1m

Specifications:

Sound frequency: 900Hz
Protection: IP55
Rating: 20 min
Voltage tolerance: $\pm 10\%$
Temperature rating (°C): -30 to +45
Cable entry: 20 mm
Construction: Aluminium alloy
Weight: 4.5Kg

