

DULUX® L LUMILUX®

IMPROVED LIFETIME & SYSTEM GUARANTEE



DULUX® L LUMILUX®



QTP-M 1x26-42®




Benefits

- Extremely economical
- Good quality of light
- Excellent luminous flux
- Improved lumen maintenance
- Long service life time
- OSRAM System+ Guarantee LUMILUX with QUICKTRONIC®
- Environmental friendly

Product Features

- Improved average lamp life: up to 20.000 h (with QUICKTRONIC®)
- Good color rendering (R_a 80...89)
- Dimming (from 100...1% with QTI DALI/DIM)
- Also as blue available
- 18 – 36W: Operation with electronic and conventional control gear + starter
- 40 – 80W: Operation with electronic control gear

Dimensions

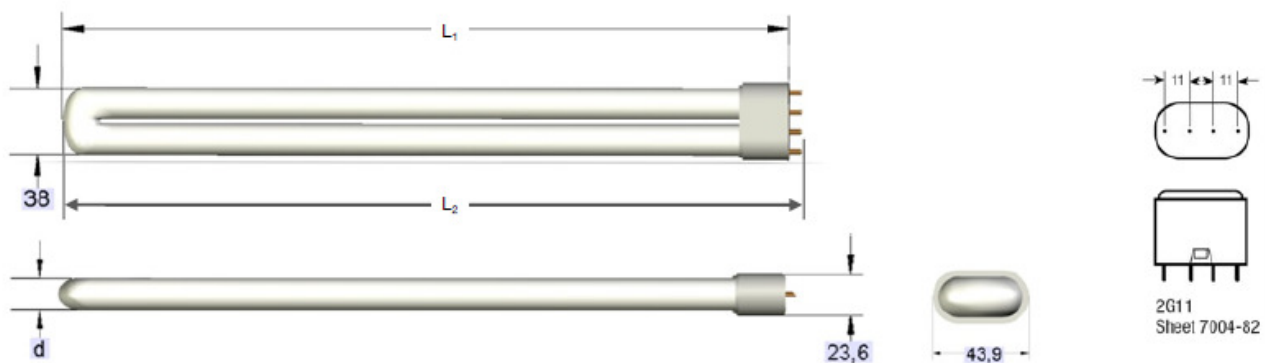

Description	Base	Max Length L1 [mm]	Max Length L1 IEC [mm]	Max Length L2 [mm]	Tube Diameter d [mm]
DULUX® L LUMILUX® 18 W	2G11	217	225	222	17.5
DULUX® L LUMILUX® 24 W	2G11	317	320	322	17.5
DULUX® L LUMILUX® 36 W	2G11	411	415	416	17.5
DULUX® L LUMILUX® 40 W	2G11	533	535	538	17.5
DULUX® L LUMILUX® 55 W	2G11	533	535	538	17.5
DULUX® L LUMILUX® 80 W	2G11	565	565	570	17.5

Electrical Data¹

Lamps operated with **50Hz** reference ballast at 25 °C (100 h aged) ambient temperature

DULUX® L LUMILUX®	Lamp Voltage rated [V]	Lamp Current rated [mA]	Lamp Power rated [W]	Compensation parallel Capacitor CCG ² mode ³ [μF]	Compensation series Capacitor CCG mode ⁴ [μF]
18 W	58	375	16	4.2	2.7
24 W	87	345	22	3.6	2.7
36 W	106	435	32	4.4	3.4

Lamps operated with **HF⁵** reference control gear at 25 °C (100 h aged) ambient temperature

DULUX® L LUMILUX®	Lamp Voltage rated [V]	Lamp Current rated [mA]	Lamp Power rated [W]
18 W	50	320	16
24 W	75	300	22
36 W	90	360	32
40 W	126	320	40
55 W	101	550	55
80 W	145	555	80

Photometrical Data at 25 °C (100 h aged) ambient temperature⁶

DULUX® L LUMILUX®	Light Color LUMILUX®	Color Rendering Index (CRI), Ra	Lumi- nance (LC ⁷ 840) [cd/cm²]	Target Color Coordinate X	Target Color Coordinate Y	Nominal Luminous Flux [lm]	Efficacy 25 °C [lm/W]	Energy Effi- ciency Class
18 W	827 INTERNA	80 ... 89	2.1	0.463	0.420	1200	67	B
18 W	830 Warm White	80 ... 89	2.1	0.440	0.403	1200	67	B
18 W	835 White	80 ... 89	2.1	0.409	0.394	1200	67	B
18 W	840 Cool White	80 ... 89	2.1	0.380	0.380	1200	67	B
24 W	827 INTERNA	80 ... 89	2.1	0.463	0.420	1800	75	B
24 W	830 Warm White	80 ... 89	2.1	0.440	0.403	1800	75	B
24 W	835 White	80 ... 89	2.1	0.409	0.394	1800	75	B
24 W	840 Cool White	80 ... 89	2.1	0.380	0.380	1800	75	B
36 W	827 INTERNA	80 ... 89	2.8	0.463	0.420	2900	81	A
36 W	830 Warm White	80 ... 89	2.8	0.440	0.403	2900	81	A
36 W	835 White	80 ... 89	2.8	0.409	0.394	2900	81	A
36 W	840 Cool White	80 ... 89	2.8	0.380	0.380	2900	81	A
36 W	865 Cool Daylight	80 ... 89	2.8	0.313	0.337	2750	76	B
36 W	880 SKYWHITE	80 ... 89	2.8	0,294	0,309	2610	73	B

¹ According to IEC 60901

² Conventional Control Gear

³ For cos phi = 0.95; Dielectric strength of the capacitor 250V AC; capacitive tolerance +/- 10%

⁴ Dielectric strength of the capacitor 450V AC


⁵ High Frequency

⁶ Measurement in accordance with IEC 60901, annex C and the relevant annex on rated colour characteristics in IEC 60081.

⁷ Light Color

DULUX® L LUMILUX®	Light Color LUMILUX®	Color Rendering Index (CRI), Ra	Lumi- nance (LC 840) [cd/cm ²]	Target Color Coordinate X	Target Color Coordinate Y	Nominal Luminous Flux [lm]	Efficacy 25 °C [lm/W]	Energy Effi- ciency Class
40 W	827 INTERNA	80 ... 89	2.3	0.463	0.420	3500	88	A
40 W	830 Warm White	80 ... 89	2.3	0.440	0.403	3500	88	A
40 W	835 White	80 ... 89	2.3	0.440	0.403	3500	88	A
40 W	840 Cool White	80 ... 89	2.3	0.380	0.380	3500	88	A
40 W	865 Cool Daylight	80 ... 89	2.3	0.313	0.337	3325	83	A
40 W	880 SKYWHITE	80 ... 89	2.3	0,294	0,309	3150	79	B
55 W	827 INTERNA	80 ... 89	3.2	0.463	0.420	4800	87	A
55 W	830 Warm White	80 ... 89	3.2	0.440	0.403	4800	87	A
55 W	835 White	80 ... 89	3.2	0.409	0.394	4800	87	A
55 W	840 Cool White	80 ... 89	3.2	0.380	0.380	4800	87	A
55 W	865 Cool Daylight	80 ... 89	3.2	0.313	0.337	4550	83	B
55 W	880 SKYWHITE	80 ... 89	3.2	0,294	0,309	4320	79	B
80 W	830 Warm White	80 ... 89	3.7	0.440	0.403	6000	75	B
80 W	840 Cool White	80 ... 89	3.7	0.380	0.380	6000	75	B
80 W	880 SKYWHITE	80 ... 89	3.7	0,294	0,309	5400	68	B

Relative Luminous Flux / Ambient Temperature

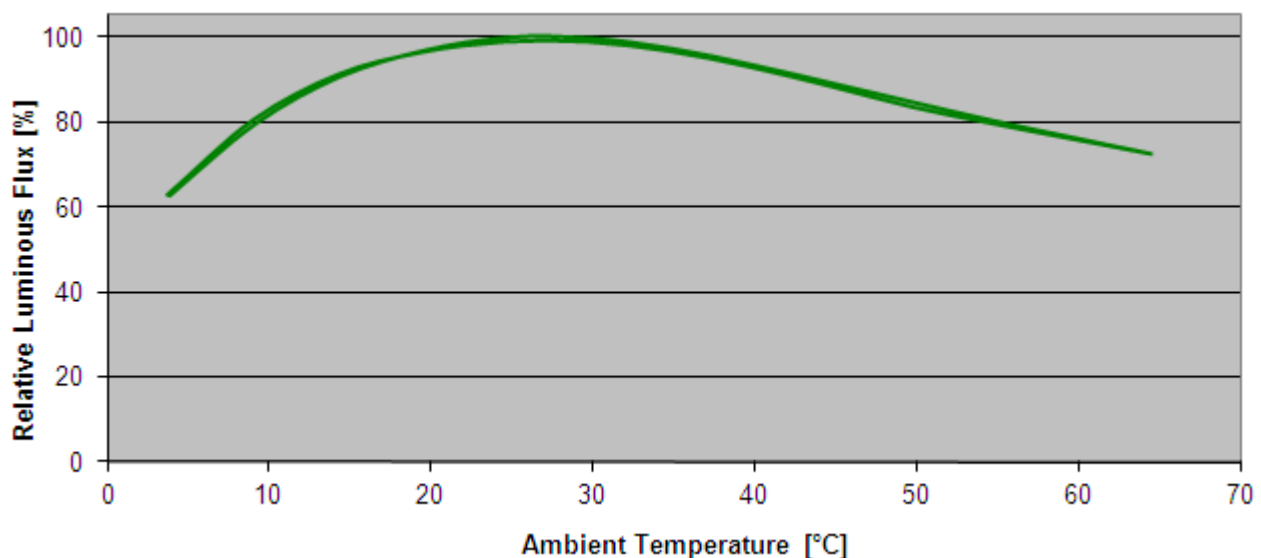

For more detailed information please refer to our technical guide – Compact Fluorescent Lamps. Free download at www.osram.com

Lifetime⁸

DULUX® L LUMILUX®	ECG ⁹ preheated IEC switching cycle ¹⁰	CCG IEC switching cycle
B50 ¹¹	20000 h	10000
Service life time ¹²	13000 h	7500
LLMF ¹³ 2000 h	0.90	0.85
LLMF 4000 h	0.84	0.78
LLMF 6000 h	0.82	0.76
LLMF 8000 h	0.81	0.75
LLMF 12000 h	0.78	-
LLMF 16000 h	0.78	-
LLMF 20000 h	0.76	-
LSF ¹⁴ 2000 h	0.99	0.99
LSF 4000 h	0.99	0.99
LSF 6000 h	0.99	0.97
LSF 8000 h	0.99	0.85
LSF 12000 h	0.95	-
LSF 16000 h	0.80	-
LSF 20000 h	0.50	-

⁸ Measurement in accordance with IEC 60901, annex C.

⁹ Electronic Control Gear

¹⁰ Switching cycle 165 min. on, 15 min. off (according to IEC)

¹¹ Average rated lamp life (B50) is the average value of the life values of individual lamps operated under standardized conditions (50% failure). In other words, this is the operation time at which, for a standardized 3-hour switching cycle (165 minutes on / 15 minutes off, see annex C, IEC 60901), 50% of a sample population of lamps have failed.

¹² Service life time is the mathematical life time (maintenance multiplied with the % of failed lamps e.g. B10) for lamps in an installation after which the installation luminous flux (100 h value) decreased with 30 % (decrease in luminous flux and failed lamps) for indoor lighting.

¹³ Lamp Lumen Maintenance Factor (Lamp luminous flux in %): Ratio of the luminous flux of a specific quantity of lamps at a defined number of hours of operation to their luminous flux at 100 h

¹⁴ Lamp Survival Factor (Lamp Survival in %): Ratio of the number of electrically intact lamps to the total number of lamps

Logistic Data

Description	EAN 10	EAN 40	Packaging Unit
DULUX® L LUMILUX 18W/827	4050300010748	4050300242163	10
DULUX® L LUMILUX 18W/830	4050300010731	4050300242149	10
DULUX® L LUMILUX 18W/835	4050300295893	4050300295909	10
DULUX® L LUMILUX 18W/840	4050300010724	4050300242125	10
DULUX® L LUMILUX 24W/827	4050300010779	4050300242200	10
DULUX® L LUMILUX 24W/830	4050300010762	4050300242187	10
DULUX® L LUMILUX 24W/835	4050300295916	4050300295923	10
DULUX® L LUMILUX 24W/840	4050300010755	4050300242330	10
DULUX® L LUMILUX 24W/67	4050300354033	4050300354040	10
DULUX® L LUMILUX 36W/827	4050300010809	4050300242279	10
DULUX® L LUMILUX 36W/830	4050300010793	4050300242248	10
DULUX® L LUMILUX 36W/835	4050300295930	4050300295947	10
DULUX® L LUMILUX 36W/840	4050300010786	4050300242224	10
DULUX® L LUMILUX 36W/865	4050300328263	4050300139364	10
DULUX® L LUMILUX 36W/880	4008321185891	4008321185907	10
DULUX® L LUMILUX 40W/827	4050300322285	4050300315867	10
DULUX® L LUMILUX 40W/830	4050300298894	4050300298900	10
DULUX® L LUMILUX 40W/835	4050300295954	4050300295961	10
DULUX® L LUMILUX 40W/840	4050300279909	4050300279916	10
DULUX® L LUMILUX 40W/865	4050300592008	4050300592015	10
DULUX® L LUMILUX 40W/880	4008321185914	4008321185921	10
DULUX® L LUMILUX 55W/827	4050300315881	4050300315898	10
DULUX® L LUMILUX 55W/830	4050300298917	4050300298924	10
DULUX® L LUMILUX 55W/835	4050300295978	4050300295985	10
DULUX® L LUMILUX 55W/840	4050300295879	4050300295886	10
DULUX® L LUMILUX 55W/865	4050300553900	4050300553917	10
DULUX® L LUMILUX 55W/880	4008321185938	4008321185945	10
DULUX® L LUMILUX 80W/830	4050300665467	4050300665474	10
DULUX® L LUMILUX 80W/840	4050300665481	4050300665498	10
DULUX® L LUMILUX 80W/880	4008321185952	4008321185969	10

Lamp/ECG System Combination

Lamp	ECG	EAN 10 ECG		Luminous flux @25°C	System power	I _n	Power Factor ECG	System luminous efficacy	Length	Width	Height	Distance between holes	T _a
				[lm]	[W]	[A]	[A]	[lm/W]	[mm]	[mm]	[mm]	[mm]	[°C]
DULUX® L LUMILUX® 18 W	QTi DALI 1x18/220-240 DIM	4050300870403		1200	18	0.08	0.97	67	360.00	30.00	21.00	350	+10...+50 °C
	QTi DALI 2x18/220-240 DIM	4050300870526		2400	37	0.16	0.97	65	425.00	30.00	21.00	415	+10...+50 °C
	QTi DALI 3x18/220-240 DIM	4008321069979		3600	53.6	0.24	0.98	67	360.00	40.00	21.00	350	+10...+50 °C
	QTi DALI 4x18/220-240 DIM	4008321070050		4800	69.3	0.31	0.98	69	360.00	40.00	21.00	350	+10...+50 °C
	QTi 1x18/220-240 DIM	4050300870601		1200	19	0.08	0.97	63	360.00	30.00	21.00	350	+10...+50 °C
	QTi 2x18/220-240 DIM	4050300870960		2400	37	0.16	0.97	65	425.00	30.00	21.00	415	+10...+50 °C
	QTi 3x18/220-240 DIM	4008321069931		3600	53.6	0.24	0.98	67	360.00	40.00	21.00	350	+10...+50 °C
	QTi 4x18/220-240 DIM	4008321070012		4800	69.3	0.31	0.98	69	360.00	40.00	21.00	350	+10...+50 °C
	QTP-DL 1x18-24	4008321117861		1200	18	0.085	0.95	67	239.00	30.00	28.00	229	-20...+50 °C
	QTP-DL 2x18-24	4008321117885		2400	36	0.16	0.98	67	239.00	40.00	28.00	229	-20...+50 °C
	QTP-M 1x26-42	4008321329134		1150	18	0.09	0.88 c	64	103.00	67.00	31.00	110	-20...+50 °C
	QTP-M 2x26-32	4008321329158		2300	36	0.16	0.95	64	123.00	79.00	33.00	129.5	-20...+50 °C
	QT-ECO 1x18-24/220-240 L	4050300660417		1200	18	0.13	0.92	67	150.00	22.00	22.00	140.00	-15...+50 °C
	QT-ECO 1x18-24/220-240 S	4050300638560		1200	18	0.13	0.92	67	80.00	40.00	22.00	72...75	-15...+50 °C
	QTi DALI 1x14/24/220-240 DIM	4050300870380		1600	25	0.11	0.98	64	360.00	30.00	21.00	350	+10...+50 °C
	QTi DALI 2x14/24/220-240 DIM	4050300870861		3600	49	0.22	0.98	73	423.00	30.00	21.00	415	+10...+50 °C
	QTi DALI 3x14/24/220-240 DIM	4008321069955		5400	73	0.32	0.99	74	360.00	40.00	21.00	350	+10...+50 °C
	QTi DALI 4x14/24/220-240 DIM	4008321070036		7200	98	0.43	0.99	73	360.00	40.00	21.00	350	+10...+50 °C
	QTi DALI-T/E 1x18-57 DIM	4008321060808		1200	26	0.12	0.96	46	123.00	79.00	33.00	129.5	+10...+50 °C
	QTi DALI-T/E 2x18-42 DIM	4008321060822		2400	51	0.22	0.97	47	123.00	79.00	33.00	129.5	+10...+50 °C
DULUX® L LUMILUX® 24 W	QTi 1x14/24/220-240 DIM	4050300870922		1800	25	0.11	0.98	72	360.00	30.00	21.00	350	+10...+50 °C
	QTi 2x14/24/220-240 DIM	4050300870946		3600	49	0.22	0.98	73	423.00	30.00	21.00	415	+10...+50 °C
	QTi 3x14/24/220-240 DIM	4008321069719		5400	73	0.32	0.99	74	360.00	40.00	21.00	350	+10...+50 °C
	QTi 4x14/24/220-240 DIM	4008321069993		7200	98	0.43	0.99	73	360.00	40.00	21.00	350	+10...+50 °C
	QTP-DL 1x18-24	4008321117861		1800	26	0.115	0.95	69	239.00	30.00	28.00	229	-20...+50 °C
	QTP-DL 2x18-24	4008321117885		3600	49	0.22	0.98	73	239.00	40.00	28.00	229	-20...+50 °C
	QTP-M 1x26-42	4008321329134		1750	25	0.12	0.94 c	70	103.00	67.00	31.00	110	-20...+50 °C
	QTP-M 2x26-32	4008321329158		3500	48	0.22	0.97	73	123.00	79.00	33.00	129.5	-20...+50 °C
	QT-M 2x26-42/220-240 S	4008321110022		3500	54	0.23	0.97	65	123.00	79.00	33.00	129.5	-20...+50 °C
	QT-ECO 1x18-24/220-240 L	4050300660417		1600	22.5	0.16	0.60	71	150.00	22.00	22.00	140	-15...+50 °C
	QT-ECO 1x18-24/220-240 S	4050300638560		1600	22.5	0.16	0.60	71	80.00	40.00	22.00	72...75	-15...+50 °C

GL LB EU&LM FT, Edition: 13.03.2012. Subject to change without notice. Despite careful review, the possibility of mistakes cannot be excluded-no guarantee will be provided.

Lamp	ECG	EAN 10 ECG	Luminous flux @25°C		System power	I _N	Power Factor ECG	System luminous efficacy	Length	Width	Height	Distance between holes	T _a
			[lm]	[W]									
DULUX® L LUMILUX® 36 W	QTi DALI 1x36/220-240 DIM	4050300870427	2900	36	0.16	0.97	81	360.00	30.00	21.00	350	+10...+50 °C	
	QTi DALI 2x36/220-240 DIM	4050300870885	5800	69	0.31	0.98	84	423.00	30.00	21.00	415	+10...+50 °C	
	QTi 1x14/24/21/39 GII	4008321383334	2750	34	0.15	0.96	81	360.00	30.00	21.00	350	-20...+50 °C	
	QTi 1x36/220-240 DIM	4050300870625	2900	36	0.16	0.97	81	360.00	30.00	21.00	350	+10...+50 °C	
	QTi 2x14/24/21/39 GII	4008321383396	5600	68	0.29	0.98	82	360.00	30.00	21.00	350	-20...+50 °C	
	QTi 2x36/220-240 DIM	4050300870755	5800	69	0.31	0.98	84	425.00	30.00	21.00	415	+10...+50 °C	
	QTP-DL 1x36-40	4008321117908	2900	35	0.17	0.99	83	239.00	30.00	28.00	229	-20...+50 °C	
	QTP-DL 2x36-40	4008321117922	5800	68	0.33	0.99	85	280.00	40.00	28.00	270	-20...+50 °C	
	QTP-M 1x26-42	4008321329134	2800	35	0.16	0.97	80	103.00	67.00	31.00	110	-20...+50 °C	
	QTP-M 2x26-32	4008321329158	5600	68	0.30	0.97	53	123.00	79.00	33.00	129.5	-20...+50 °C	
DULUX® L LUMILUX® 40 W	QT-M 2x26-42/220-240 S	4008321110022	5600	70	0.30	0.97	80	123.00	79.00	33.00	129.5	-20...+50 °C	
	QT-M 2x26-42/220-240 S	4008321110022	5600	70	0.30	0.97	80	123.00	79.00	33.00	129.5	-20...+50 °C	
	QTi DALI 1x21/39/220-240 DIM	4050300870366	3500	41.8	0.18	0.98	84	360.00	30.00	21.00	350	+10...+50 °C	
	QTi DALI 2x21/39/220-240 DIM	4050300870489	7000	82	0.36	0.97	85	425.00	30.00	21.00	415	+10...+50 °C	
	QTi DALI-T/E 1x18-57 DIM	4008321060808	3500	45	0.2	0.98	78	123.00	79.00	33.00	129.5	+10...+50 °C	
	QTi DALI-T/E 2x18-42 DIM	4008321060822	7000	87	0.38	0.99	80	123.00	79.00	33.00	129.5	+10...+50 °C	
	QTi 1x14/24/21/39 GII	4008321383334	3500	44	0.19	0.98	80	360.00	30.00	21.00	350	-20...+50 °C	
	QTi 1x21/39/220-240 DIM	4050300870564	3500	41.8	0.18	0.98	84	360.00	30.00	21.00	350	+10...+50 °C	
	QTi 2x14/24/21/39 GII	4008321383396	7000	86	0.37	0.98	81	360.00	30.00	21.00	350	-20...+50 °C	
	QTi 2x21/39/220-240 DIM	4050300870694	7000	82	0.36	0.97	85	423.00	30.00	21.00	415	+10...+50 °C	
DULUX® L LUMILUX® 55 W	QTP-DL 1x36-40	4008321117908	3600	45	0.21	0.99	80	239.00	30.00	28.00	229	-20...+50 °C	
	QTP-DL 2x36-40	4008321117922	7300	90	0.21	0.99	81	280.00	40.00	28.00	270	-20...+50 °C	
	QTP-M 1x26-42	4008321329134	3500	43	0.19	0.98	81	103.00	67.00	31.00	110	-20...+50 °C	
	QTi DALI 1x28/54/220-240 DIM	4050300870809	4800	59	0.26	0.99	81	360.00	30.00	21.00	350	+10...+50 °C	
	QTi DALI 2x28/54/220-240 DIM	4050300870502	9600	115	0.51	0.99	83	423.00	30.00	21.00	415	+10...+50 °C	
	QTi 1x28/54/220-240 DIM	4050300870588	4800	59	0.26	0.99	81	360.00	30.00	21.00	350	+10...+50 °C	
	QTi 1x35/49/80 GII	4008321383372	4800	59	0.26	0.99	81	360.00	30.00	21.00	350	-20...+50 °C	
	QTi 2x28/54/220-240 DIM	4050300870717	9600	115	0.51	0.99	83	423.00	30.00	21.00	415	+10...+50 °C	
	QTP5 1x54	4008321329394	4450	54	0.24	0.98	82	280.00	30.00	21.00	270	-20...+50 °C	
	QTP5 2x54	4008321329097	8900	110	0.48	0.99	81	360.00	30.00	21.00	350	-20...+50 °C	
QTP-DL 1x55 GII	4008321390158	4800	59	0.26	0.99	81	280.00	30.00	21.00	270	-20...+50 °C		
QTP-DL 2x55 GII	4008321390172	9600	116	0.51	0.99	83	360.00	30.00	21.00	350	-20...+50 °C		
QTP-FC 1x55	4008321537041	4700	60	0.26	0.99	78	103.00	67.00	31.00	350	-20...+50 °C		
QT-FQ 2x80	4050300825564	9600	122	0.59	0.99	79	423.00	30.00	21.00	415	-20...+50 °C		

GL B EU&LM FT, Edition: 13.03.2012. Subject to change without notice. Despite careful review, the possibility of mistakes cannot be excluded-no guarantee will be provided.

Lamp	ECG	EAN 10 ECG	Luminous flux @25°C [lm]	System power [W]	I _n [A]	Power Factor ECG	System luminous efficacy [lm/W]	Length [mm]	Width [mm]	Height [mm]	Distance between holes [mm]	T _a [°C]
DULUX® L LUMILUX® 80 W	QTi DALI 1x35/49/80/220-240 DIM	4050300870342	6000	88	0.4	0.99	68	360.00	30.00	21.00	350	+10...+50 °C
	QTi DALI 2x35/49/80/220-240 DIM	4050300870441	12000	165	0.74	0.99	73	423.00	30.00	21.00	415	+10...+50 °C
	QTi 1x35/49/80 GII	4008321383372	6000	85	0.38	0.98	71	360.00	30.00	21.00	350	-20...+50 °C
	QTi 1x35/49/80/220-240 DIM	4050300870540	6000	88	0.4	0.99	68	360.00	30.00	21.00	350	+10...+50 °C
	QTi 2x35/49/80/220-240 DIM	4050300870540	12000	165	0.74	0.99	73	360.00	30.00	21.00	350	+10...+50 °C
	QTP5 1x80	4008321329059	6000	86	0.38	0.98	70	360.00	30.00	21.00	350	-20...+50 °C
	QT-FQ 2x80	4050300825564	12300	175	0.76	0.99	70	423.00	30.00	21.00	415	-20...+50 °C

For more information on ECG refer to <http://www.osram.com/ecg>

For more information on System Guarantee refer to <http://www.osram.com/guarantee>

In case of lamp breakage: www.osram.com/brokenlamp

For more information technical Information see Technical guide. Free download at www.osram.com