



MASTERColour CDM-TC Elite

MASTERColour CDM-TC Elite 70W/930 G8.5 1CT/12

Single-ended, compact size, high-efficiency Ceramic Metal Halide discharge lamp

Warnings and Safety

- Use only in totally enclosed luminaire, even during testing (IEC61167, IEC 62035, IEC60598)
- The luminaire must be able to contain hot lamp parts if the lamp ruptures
- Use only with electronic control gear
- Control gear must include end-of-life protection (IEC61167, IEC 62035)
- A lamp breaking is extremely unlikely to have any impact on your health. If a lamp breaks, ventilate the room for 30 minutes and remove the parts, preferably with gloves. Put them in a sealed plastic bag and take it to your local waste facilities for recycling. Do not use a vacuum cleaner.

Product data

General Information			
Cap base	G8.5 [G8.5]	Lumen maintenance 12,000 hours (nom.)	82 %
Burning Position	UNIVERSAL [Any/Universal]	Lumen maintenance 10,000 hours (nom.)	83 %
Life to 5% failures (nom.)	12000 h	Lumen maintenance 2,000 hours (nom.)	95 %
Life to 10% failures (nom.)	14000 h	Lumen maintenance 5,000 hours (nom.)	88 %
Life to 20% failures (nom.)	16000 h	Chromaticity coordinate X (nom.)	0.435
Life to 50% failures (nom.)	20000 h	Chromaticity coordinate Y (nom.)	0.396
ANSI code HID	C139/E	Colour Temperature, horizontal (Nom)	3000 K
Light Technical		Lamp Luminous Efficacy EM (Nom)	107 lm/W
Colour Code	930 [CCT of 3,000 K]	Colour Rendering Index,horiz (Min)	87
Lamp Luminous Flux (Nom)	7800 lm	Colour Rendering Index,horiz (Nom)	90
Colour Designation	Warm white (WW)	Operating and Electrical	
		Power (Rated) (Nom)	73.2 W

MASTERColour CDM-TC Elite

Lamp current run-up (max.)	2 A
Ignition supply voltage (max.)	198 V
Ignition peak voltage (max.)	5000 V
Ignition supply voltage (min.)	198 V
Re-ignition time (min.) (max.)	15 min
Ignition time (max.)	30 s
Voltage (Max)	90 V
Voltage (Min)	80 V
Voltage (Nom)	85 V

Controls and Dimming

Dimmable	No
Run-up time 90% (max.)	3 min
Run-up time 90% (nom.)	1.5 min

Mechanical and Housing

Lamp Finish	Clear
-------------	-------

Approval and Application

Energy efficiency label (EEL)	A+
Mercury (Hg) content (nom.)	6.6 mg
Energy consumption kWh/1,000 hours	80 kWh

Dimensional drawing

. D .

CDM-TC Elite 70W/930 G8.5

UV	
PET (NIOSH) (min.)	8 h/500lx
Damage factor D/fc (max.)	0.3

Luminaire Design Requirements

Bulb temperature (max.)	550 °C
Pinch temperature (max.)	350 °C


Product Data

Full product code	871869648471500
Order product name	MASTERColour CDM-TC Elite 70W/930 G8.5 1CT/12
EAN/UPC – product	8718696484715
Order code	928189505129
Numerator – quantity per pack	1
SAP numerator – packs per outer box	12
Material no. (12 NC)	928189505129
SAP net weight (piece)	10.000 g
ILCOS code	MT/UB-70/930-H-G8.5-17/85


Product	D (max)	O	L (min)	L (max)	L	C (max)
MASTERColour CDM-TC	15 mm	7.15	51 mm	53 mm	52 mm	85 mm
Elite 70W/930 G8.5 1CT/12		mm				

MASTERColour CDM-TC Elite

Photometric data

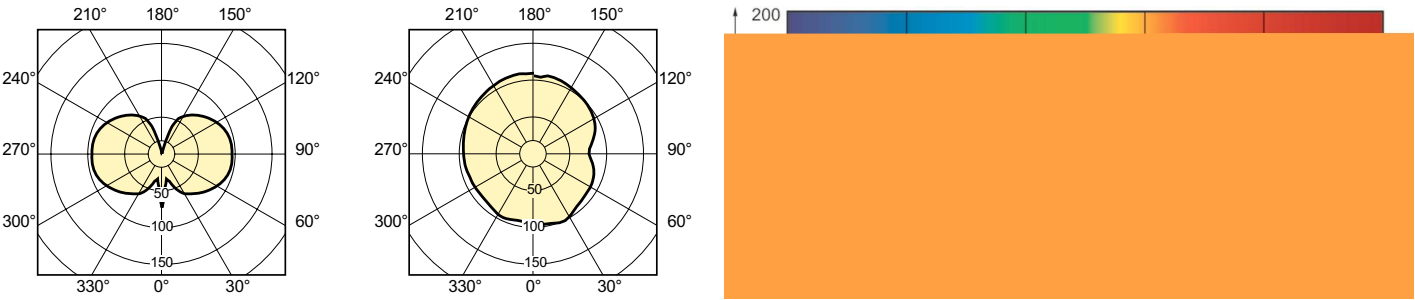

Lifetime

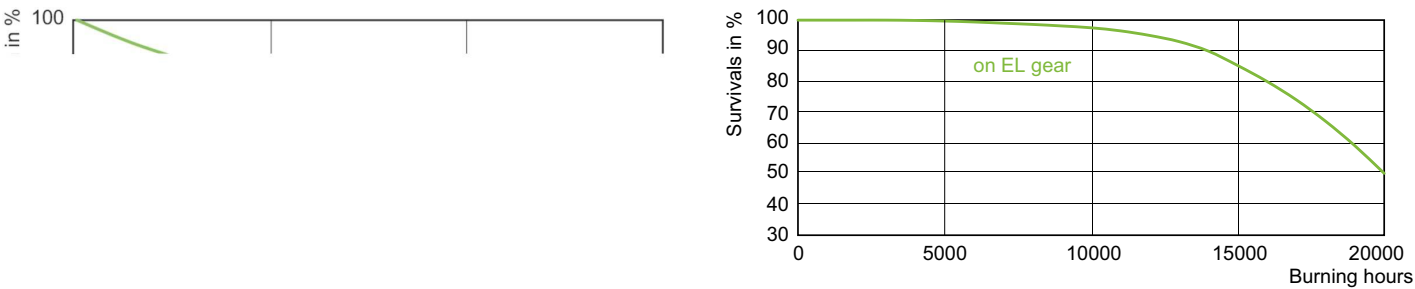

LDLE_CDMTC-E_0002-Life expectancy diagram

