


Eco LED Batten Gen4

ECOBAT202ECSLSG4

- Comes with an opalised diffuser for even light distribution.
- Uses quick release clips and removable connectors for easy installation.
- Increased visual comfort with less than 1% flicker.

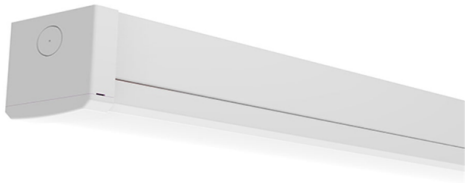


LUMEN  COLOUR 

Performance

System Power	18W, 14W, 16W, 11W
Exit Lumen	2000lm, 1500lm, 1700lm, 1200lm
Efficacy	110lm/W
CCT	4000K, 5000K, 6500K
CRI	80
Operating Temperature	0 to 40
MacAdam Steps	5SDCM
Ingress Protection Rating	IP20
Beam Distribution	Symmetric
Beam Angle	120°
Lifetime	54,000hrs (L70/B50) @ 40°C

Line Drawings



Product Images



Physical

Dimensions	L603 x W74 x H74 mm
Diffuser	Opal
Luminaire Colour	White
Weight	0.80kg
Luminaire Material	Steel (Mild)
Driver Location	Integrated
Finish	Powder Coated
Installation	Ceiling Surface Mounted

Electrical

Dimming	Non - Dimmable
Voltage	240V
Inrush Current	14A
Inrush Current Duration	120µs
Line Current	0.08A
Electrical Rating	Class 1

