

# MODERN & STYLISH QUICK CONNECT LED EXIT LUMINAIRE



## **STINGRAY 2** LED EXIT LIGHT COMPLETE WITH LITHIUM IRON PHOSPHATE BATTERY

A modern quick connect exit sign ideal for commercial interior applications.



# STINGRAY 2 LED EXIT LIGHT COMPLETE WITH LITHIUM IRON PHOSPHATE BATTERY

A stylish, quick connect LED exit luminaire for interior exit sign application.

## FEATURES

- Compliant to AS/NZS 2293
- Ceiling mount, with optional wall mount
- Complete with replaceable Lithium Iron Phosphate (LiFePO<sub>4</sub>) battery
- Optional black 'theatre' body housing and pictogram inserts
- Optional IP65 KIT (Aqualock)
- Manual test
- Maintained emergency exit
- All in one solution including all pictogram inserts
- Also available in DALI version
- 24m viewing distance
- 3 year warranty including battery

## BENEFITS

- Long LED life of 50,000 hours L70 provides low maintenance costs
- One box solution with a fully integrated assembly makes for easier installation
- Replaceable Lithium Iron Phosphate (LiFePO<sub>4</sub>) battery

## SPECIFICATIONS

- Wattages: Maximum 4.6W
- Photometric Measurements: 27lm at 1W
- Voltage: 240V
- Ingress Protection: IP20 rated & optional IP65 kit
- Maximum Ambient Temperature: Ta40°C
- LED Life: 50,000 hours L70
- Weight: 1.2kg
- Dimension: L395 x W81 x H245 (mm)
- Colour: White (Black option available)
- Battery Specification: LiFePO<sub>4</sub> Battery, 1 Cell 3.2V 1500 mAh
- Classification:
  - STLED-L (Standard): C0/C180:D3.2 C90/C270:E2 (2HR)

## OPTIONAL ACCESSORIES

- AQUALOCK-W : IP65 kit
- Rod Suspension Kit
- Cantilever Bracket Wall Mount Kit

## REPLACEMENT BATTERY

- BATPK1500/1L11: LiFePO<sub>4</sub> Battery, 1 Cell 3.2V 1500 mAh

## APPLICATION

Ideal for emergency lighting, commercial and apartment buildings, retail, cinemas and halls.




STLED-L



STTLED-L



AQUA LOCK-W (IP65) with LED Stingray

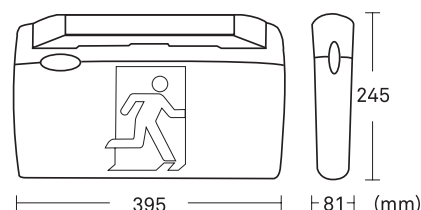

All pictogram inserts  
STLED-L (Standard)



All pictogram inserts  
STTLED-L (Theatre)

# STINGRAY 2 LED EXIT LIGHT

## COMPLETE WITH LITHIUM IRON PHOSPHATE BATTERY



STLED-L

### STLED-L (STANDARD):

#### AS/NZS2293.1:2018 CLASSIFICATION TABLE

ALLOWABLE LUMINAIRE MOUNTING HEIGHT (M)	LUMINAIRE MAXIMUM SPACING FOR EACH PLANE (M)	
	C0/C180	C90/C270
2.1	6.5	5
2.4	6.5	5.2
2.7	6.5	5.2

PRODUCT CODE	DESCRIPTION	WATTAGE	DIMENSION (MM)	MASS (KG)
STLED-L	Standard STINGRAY2	4.6W (maximum)	L395 x W81 x H245	1.2
STTLED-L	Theatre/Black STINGRAY2	4.6W (maximum)	L395 x W81 x H245	1.2

### ACCESSORIES

BATPK1500/1L11	LiFePO4 Battery, 1 Cell 3.2V 1500 mAh
AQUALOCK-W	IP65 Enclosure
99023330	Rod Suspension Kit 1600mm white
EXCB	Cantilever Bracket Wall Mount Kit

240V

4.6W  
MAXIMUM

ta40

50,000  
HOURS  
RATED AVERAGE  
DESIGN LIFE\*

3  
YEAR  
WARRANTY†  
INCLUDING BATTERY

IP20  
RATED

24m  
VIEWING  
DISTANCE



\*Rated LED design life where stated is based upon application of PIERLITE's operating and maintenance guidelines; see [www.gerardlighting.com.au](http://www.gerardlighting.com.au)  
Actual product life may vary dependent upon frequency of maintenance and product application. Due to continual product improvement, information is subject to change without notification. †Gerard Lighting Pty Ltd standard Terms and Conditions apply.



Issue: November 2018