

Vandalux®

The benchmark range of fluorescent luminaires for hostile, vandal-prone environments or adverse industrial applications.



Specification

- Pressure die-cast, low copper aluminium alloy body with powder coat paint finish in RAL 8301 grey
- Models can be customised to suit specific applications, environments and operational criteria
- Optional prismatic, clear or opalised polycarbonate lens, UV stabilised
- White powder coated gear tray has screw locators and lanyards for ease of maintenance
- Replaceable single piece EPDM gasket ensures the high IP66 rating
- Cable entry via 20mm threaded ports at both ends plus provision via centre of the base
- Various accessories allow mounting on to wall and pole brackets, supplied separately
- 18W emergency versions have a thermally isolated battery housing annexed to the body
- Ex Zone rated versions available
- Energy efficient T5 HE and T5 HO lamp systems available
- IK10 impact resistance



Quick Spec

Pierlite Vandalux IP66, die-cast LM6 aluminium body with powdercoat finish and polycarbonate lens in prismatic, clear or opal; rated IK10.

Design Application

Heavy industrial areas, railway stations, wharves, sports grounds, car parks, construction sites, maritime areas, factories, mine sites and schools. Contact Pierlite regarding suitability for use in chemically laden environments.

Product Codes




Code	Version	Dim (mm)	Mass (kg)
VP114	1 x 14W T5	670 x 140 x 120	4.0
VP118H	1 x 18W T8	670 x 140 x 120	4.5
VP128	1 x 28W T5	1310 x 140 x 120	7.0
VP136H	1 x 36W T8	1310 x 140 x 120	7.5
VP214	2 x 14W T5	670 x 140 x 120	4.0
VP218H	2 x 18W T8	670 x 140 x 120	5.0
VP228	2 x 28W T5	1310 x 140 x 120	7.0
VP236H	2 x 36W T8	1310 x 140 x 120	8.0

Accessories

C36VANDALUX	Ceiling Mount Bkt
C34VANDALUX	Corner Wall Bkt 5' upcast, Dia. 34mm spigot
C33VANDALUX	Flat Wall Bkt 5' upcast, Dia. 34mm spigot
C29VANDALUX	Horizontal Wall Bkt 36W
C28VANDALUX	Horizontal Wall Bkt 18W
PMB32/VAN	Single Pipe Mt Bkt T/S Dia. 42 - 46mm
PMB40/VAN	Single Pipe Mt Bkt T/S Dia. 48 - 51mm
C32VANDALUX	Spigot Mt Kit, Cable Gland T/S dia.34mm pipe
C35VANDALUX	Universal Bkt

Performance

VP 236 2x TLD 36W/840

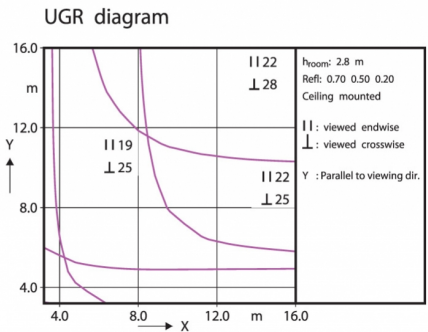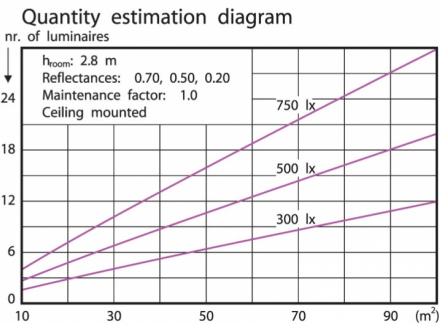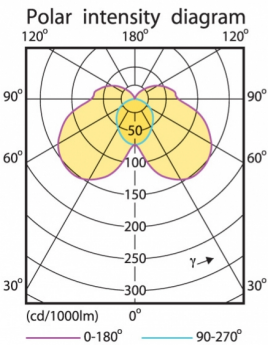



Adverse Lighting



Max Dim (mm)
1610 x 140 x
120