


COMMERCIAL LED CORROSION PROOF FITTINGS

NEW!

SULTAN LED Corrosion Proof Available in 1,200mm (4ft) Single & Double, Standard or Emergency

- LED replacement for 36W fluorescent fittings
- 90 lumens per circuit watt
- 5,000K cool white light output
- 30,000 hour average rated LED life
- Suitable for PIR switching
- Complete with stainless steel clips
- Polycarbonate base and diffuser ensure corrosion resistance and high impact rate (IK 08)
- Emergency version c/w test switch provides 3 hour emergency duration
- 10% lumen output in emergency mode
- IP65 - can be used for internal or external applications



CODE	WIDTH	HEIGHT	LENGTH
RSU245012/E-24	85mm	77mm	1,230mm
RSU485012/E-24	103mm	77mm	1,230mm

	1 x 24W	2 x 24W
Standard	RSU245012-24	RSU485012-24
Emergency	RSU245012E-24	RSU485012E-24
Comparable to:	1 x 36W	2 x 36W
Total Power (W):	24	48
Power Factor:	>0.9	>0.9
Total Light Output (lm):	2,160	4,320
Beam Angle (deg):	120	120
Lux at 1m (lux):	550	1,100
CCT (K):	5,000	5,000
CRI:	80	80
Efficacy (lm/cctW):	90	90
Lifetime (hrs):	30,000	30,000
Length (mm):	1,230	1,230
Width (mm):	85	103
Height (mm):	77	77
Weight (kg):	1.32	1.54
IP:	65	65



COMMERCIAL

LED CORROSION PROOF FITTINGS


SULTAN LED Corrosion Proof

Available in 600mm (2ft) Single & Double



- LED replacement for 18 W fluorescent fittings
- 90 lumens per circuit watt
- 5,000K cool white light output
- 30,000 hour average rated LED life
- Suitable for PIR switching
- Complete with stainless steel clips
- Polycarbonate base and diffuser ensure corrosion resistance and high impact rate (IK 08)
- Emergency version c/w test switch provides 3 hour emergency duration
- 10% lumen output in emergency mode
- IP65 - can be used for internal or external applications

	1 x 12W	2 x 12W
	RSU125006-24	RSU245006-24
Comparable to:	1 x 18W	2 x 18W
Total Power (W):	12	24
Power Factor:	>0.9	>0.9
Total Light Output (lm):	1,100	2,100
Beam Angle (deg):	120	120
Lux at 1m (lux):	300	600
CCT (K):	5,000	5,000
CRI:	80	80
Efficacy (lm/cctW):	92	88
Lifetime (hrs):	30,000	30,000
Length (mm):	632	632
Width (mm):	85	103
Height (mm):	77	77
Weight (kg):	0.8	0.95
IP:	65	65



CODE	WIDTH	HEIGHT	LENGTH
RSU125006-24	85mm	77mm	632mm
RSU245006-24	103mm	77mm	632mm

LED

incl.

✓

3 YRS

88-92

LmW

IP 65

OP 220 240

PHOTO METRICS



COMMERCIAL

LED CORROSION PROOF FITTINGS

Sleek, slim and robust, the new SULTAN LED corrosion proof from ROBUS is a perfect LED retrofit solution where fluorescent corrosion proofs are used. The high strength opal diffuser delivers a superior evenly diffused light output perfect for use in car parks, cold stores, corridors and garages.

FEATURES:

CORROSION PROOF

IP65

SLIM PROFILE

83mm wide for single fittings
103mm wide for double fittings

HIGH STRENGTH POLYCARBONATE BASE & DIFFUSER

Wide beam angle and no glare
Evenly diffused light

EASY INSTALLATION

Wired through the back and wired
through the fitting

COST EFFECTIVE


35% energy saving
30,000 hour average rated LED life
Reduced energy, maintenance
and disposal

WIDE RANGE OF APPLICATIONS

No heat filaments or electrodes
Resistant to shock and vibration

PERFORMANCE DRIVEN

Up to 90 lumens per circuit watt
SMD LED's 3 year warranty

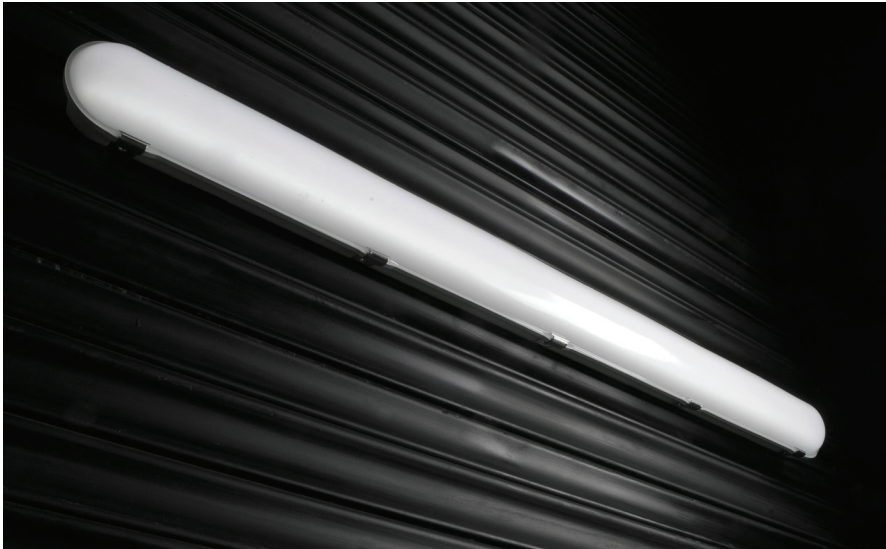

COMMERCIAL
LED CORROSION PROOF FITTINGS

THE SLEEK LINEAR FLUORESCENT REPLACEMENT

Single 4FT	RSU245012-24
Double 4FT	RSU485012-24
Single 2FT	RSU125006-24
Double 2FT	RSU245006-24

SULTAN
BUILT TO LAST

