



LED OYSTER & PENDANT LIGHTS

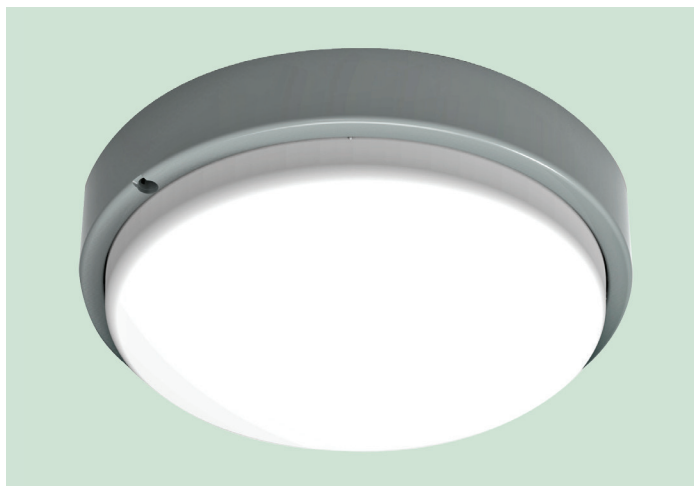


www.sal.net.au

LED OYSTER LIGHT SL2106TC BENNY



DIP SWITCH

- Select colour temperature with DIP switch

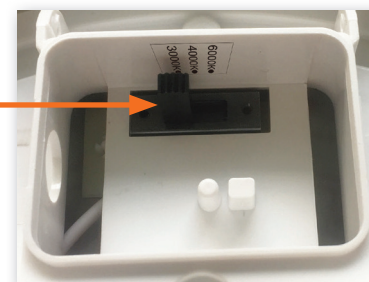


CONSTRUCTION

- Select colour temperature with DIP switch
- Polycarbonate housing
- Opal polycarbonate diffuser
- Double insulated
- Built-in high efficiency SMD LED chips

IP RATING

- IP65 weatherproof

DIMENSIONS

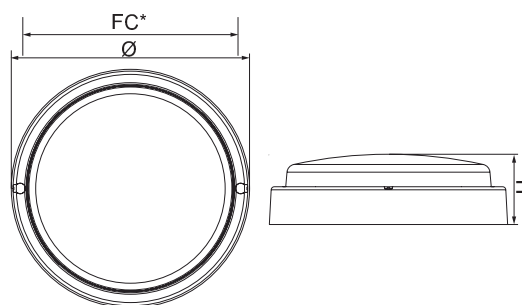

OPTIONS (Available to order)

SL2106/30TC/S

- Sunset function
- Extended on time

SL2106/40TC/C

- Shorter time to stand-by
- Stand-by feature: 10% or 30% output
- Stand-by period: 30 mins. or 60 mins.

SL2106/30TC/S

- Features integral 360° microwave occupancy sensor
- Time to off: 10 mins.

SL2106/40TC/C

- Features integral 360° microwave occupancy sensor
- Time to stand-by: 12 mins
- Stand-by feature: 20% output



Model No.	Input	Power	Lumen	CCT	CRI	Dimensions Ø x H	FC*	Fitting Colour
SL2106/20TC	240V	10W	800lm	3000K/4000K/6000K selectable	>80	220 mm x 65 mm	204 mm	White
SL2106/30TC	240V	20W	1600lm	3000K/4000K/6000K selectable	>80	280 mm x 71 mm	263 mm	White
SL2106/30TC/S	240V	20W	1600lm	3000K/4000K/6000K selectable	>80	280 mm x 71 mm	263 mm	White
SL2106/40TC	240V	24W	2000lm	3000K/4000K/6000K selectable	>80	350 mm x 81 mm	332 mm	White
SL2106/40TC/C	240V	24W	2000lm	3000K/4000K/6000K selectable	>80	350 mm x 81 mm	332 mm	White

*FC = Fixing Centres

Specifications above are for reference only and may vary without prior notice