



## LED COMMERCIAL EXTERIOR LIGHTS

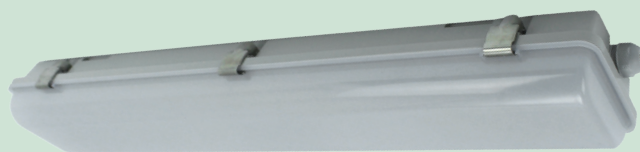

www.sal.net.au

# IP65 LED WEATHERPROOF BATTEN SL9726/TC SOL




SL9726/20TC




SL9726/40TC

### DIMENSIONS

SL9726/20TC

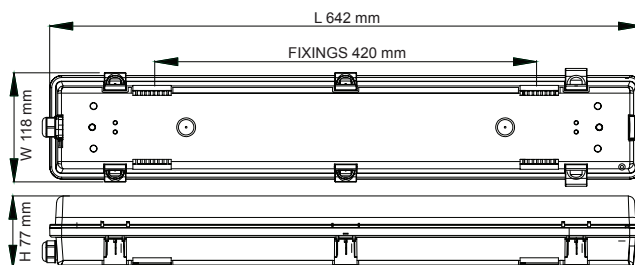

SL9726/40TC

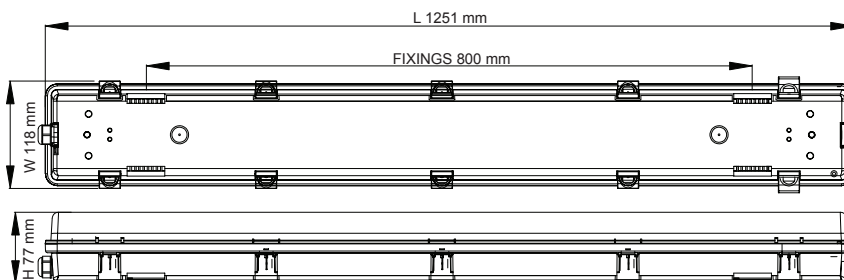

### CONSTRUCTION

- Polycarbonate body & diffuser
- Stainless steel clips, vandalproof
- Built-in high efficiency SMD LED chips
- Constant current LED driver fitted

### IP RATING

- IP65 weatherproof

### FEATURES

- Surface/suspended mounting clips to maintain IP rating



Surface mounting bracket




Suspension Kits

### INSTALLATION TYPE

- Surface mounted
- Suspended (Suspension unit is required)

### ACCESSORIES

- PVC cable glands
- Surface mounting bracket & clip



### DIP SWITCH

- Select colour temperature with DIP switch



Model No.	Input	Power	Lumen	CCT	CRI	Beam Angle	Dimensions L x W x H	IK Rating
SL9726/20TC	240V	20W	1800lm	3000K/4000K/6000K	>80	120°	642 mm x 118 mm x 77 mm	08
SL9726/40TC	240V	40W	3600lm	3000K/4000K/6000K	>80	120°	1251 mm x 118 mm x 77 mm	08