



KINGSTON DIMMABLE SL2115/TCD - 13W/30W

Dimmable, super low profile LED Oyster 13, 24 or 30 watt, with selectable CCT, IP54

Application

A perfect choice for apartments, residential or commercial spaces

Design Specifications

- Selectable CCT 3000K / 4000K / 5700K
- High performance IP54 opal PC mounting base and LED optical module
- High efficiency LED optics, CRI > 80, 100° beam distribution
- Integral, dimmable LED driver, choice of 13, 24 or 30 watt
- Double insulated, ceiling mount



Performance

- Dimmable - **YES**
- Dimmer Type - **Trailing edge**



Technical Specification

Product	Model No.	Input Voltage (V/AC)	Power (W)	Lumens (lm)	CCT (K)	CRI
	SL2115/25TCD	240	13	1000/1150/1050	3000/4000/5700	80
	SL2115/30TCD	240	24	1900/2100/2000	3000/4000/5700	80
	SL2115/40TCD	240	30	2600/2800/2700	3000/4000/5700	80


Dimmable	Beam Angle (°)	Body Colour	Diameter (mm)	Dim (mm)
YES	100	White	244	26(H)
YES	100	White	294	26(H)
YES	100	White	420	30(H)


Due to continued product and technology enhancements, data sourced from sal.net.au shall not form part of any contract and or technical performance guarantee unless expressly confirmed in writing by SAL at the time of order. Products are sold in accordance with [SAL Terms and Conditions of sale](#) and all images shown are for illustration purposes only and may vary from the actual colour or finish. Unless specifically stated, all IP ratings nominated for Interior products are from "below the ceiling".

Dimensions

SL2115_25TCD

SL2115_30TCD

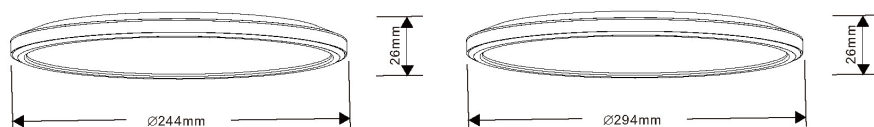

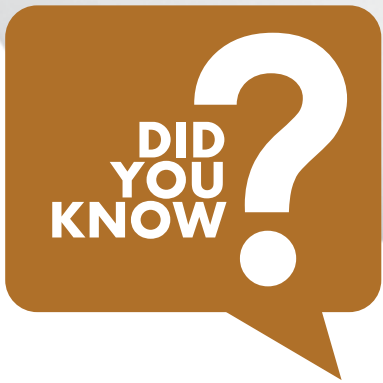A brown speech bubble with a white question mark and the text 'DID YOU KNOW?' in white.

**DID
YOU
KNOW?**

A table with three columns representing different colour temperatures: Warm White (3000K), Cool White (4000K), and Daylight (5700K). The table has a grey header row and three colored data rows (orange, green, and blue).

TC SELECTABLE COLOUR		
WARM WHITE 3000K	COOL WHITE 4000K	DAYLIGHT 5700K

Not sure about what colour temperature you need for an installation? Consider selecting the TC (tri-colour) range from SAL, which allows the installer to simply select the CCT between 3000K, 4000K or 5700K via the integral DIP switch. Easy to use, less stock to manage and allows the installer to create the perfect room ambience.