



LED DIFFUSED BATTEN

S9733L WIDELINE

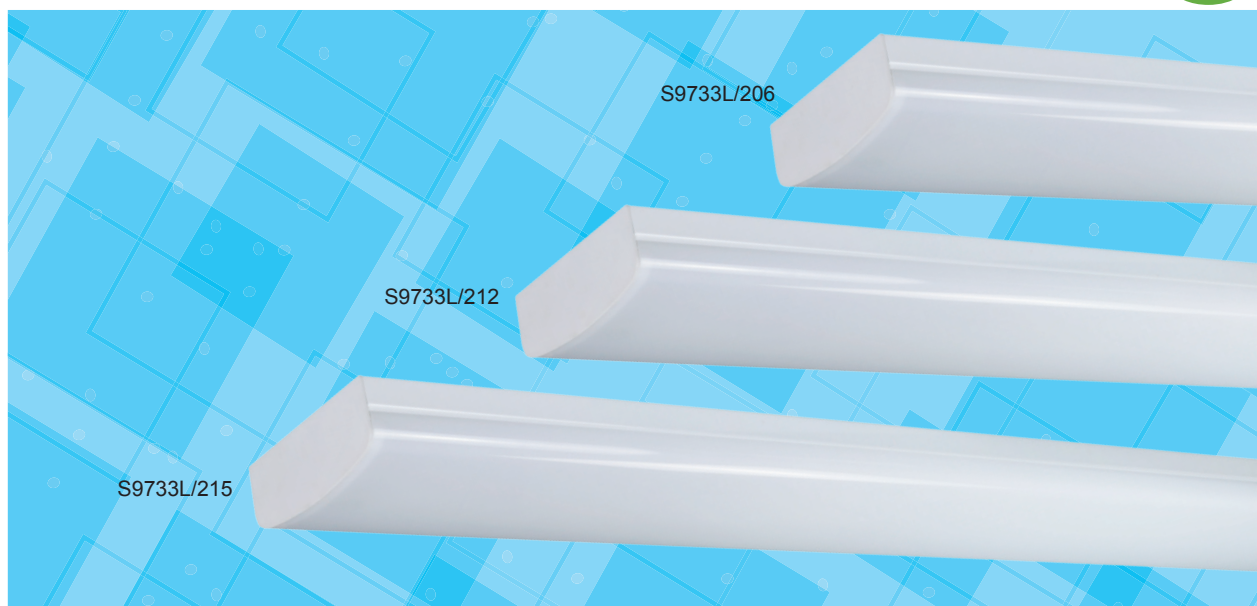

DIMENSIONS

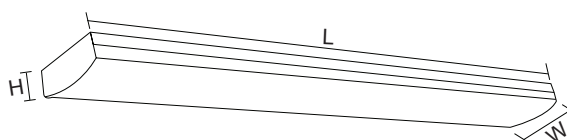

CONSTRUCTION

- Wide steel body
- Powder coated finish
- Opal polycarbonate diffuser
- High efficiency SMD LED chips
- Built-in constant current non-dimmable LED driver

- Large terminal block, easy installation
- Select colour temperature with DIP switch (TC models)

IP RATING

- IP20 suitable for interior use only

Model No.	Input	Power	Lumen	CCT	Beam Angle	CRI	Fitting Colour	Dimensions L x W x H
S9733L/212CW	240V	40W	3600lm	4000K	120°	>80	White	1144 x 160 x 60 mm
S9733L/212DL	240V	40W	3700lm	5700K	120°	>80	White	1144 x 160 x 60 mm
S9733L/206TC	240V	20W	1800lm	3000K/4000K/5700K	120°	>80	White	610 x 160 x 60 mm
S9733L/212TC	240V	38W	3700lm	3000K/4000K/5700K	120°	>80	White	1145 x 160 x 60 mm
S9733L/215TC	240V	65W	5400lm	3000K/4000K/5700K	120°	>80	White	1495 x 160 x 60 mm

PHOTOMETRIC DATA

UNIT: cd C0/C180 — C90/C270 —

S9733L/212DL

