



### STARGEM III SE7080/1TC - 15W

15 watt IP65 wall mounted LED floodlight with TC selectable colour temperature

### STARGEM III SE7080/2TC - 2 X 15W

2 x 15 watt IP65 wall mounted LED floodlight with TC selectable colour temperature



SE7080/1TC/BK



SE7080/2TC/BK


#### Application

A stylish solution for residential exterior spaces


#### Design Specifications

- Robust adjustable black aluminium optical head assembly
- Durable polycarbonate mounting base
- Opal polycarbonate diffuser, beam distribution 100° per head
- CCT colour selectable 3000K/4000K/5700K
- High efficiency SMD LED chips, integral non-dimmable LED driver

#### Dimensions



SE7080/1TC/BK

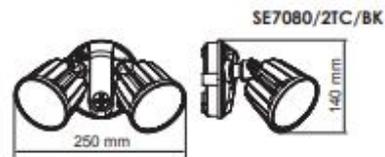

SE7080/2TC/BK



#### Technical Specifications

Model No.	Input (V)/(Hz)	Power (W)	Lumen (lm)	CCT (K)	CRI	Beam Angle	Dimmable	Fitting Colour
SE7080/1TC/BK	240/50	15	1200/1300/1250	3000/4000/5700	> 80	100°	No	Black
SE7080/2TC/BK	240/50	2 x 15	2 x 1200/1300/1250	3000/4000/5700	> 80	2 x 100°	No	Black

For terms and conditions of catalogue data use, refer to INDEX