

Catalogue No: **CAQ7-16-11-240VAC**
CONTACTOR 3P 15kVAr 240V AC COIL 1N/O 1N/C AUXILIARY

Motor Control and Drives > Motor Starting and Protection > Contactors > Sprecher+Schuh Contactors > CA7 Contactors
> CAQ7 Capacitor Switching Contactors



Representative Photo Only
(actual product may vary based on configuration selections)

Contactor 15KVaristor Capacitor 240 auxiliary 1N/O 1N/C



- Available in AC or DC control coil versions to suit your application requirements
- Common accessories across CA7 contactors simplifies inventory requirements and maximises usability
- Reversible (line or load side) coil terminations provides total flexibility
- DIN rail mountable for easy installation

SPECIFICATIONS	
Component Type Motor Control and Drives	Standard Contactor
Ie, Rated Operational Current, AC-1, 415V, 40°C	32 A @415V, 40°C
kW Rating, AC-3, 415V, 60°C	15.5 kW @415V, 60°C
Ie, Rated Operational Current, AC-3, 415V, 60°C	16 A @415V, 60°C
kW Rating, AC-3, 690V, 60°C	25 kW @690V, 60°C
Ie, Rated Operational Current, AC-3, 690V, 60°C	9 A @690V, 60°C
Integrated Aux	1 N/O + 1 N/C
Coil Type	Conventional
Coil Voltage	240 V AC V
IP Rating	IP20

REFERENCES	
IECEx Certificate	-
Supplier Declaration of Conformity:	-
Installation Guide:	-
User Manual:	-
Manufacturer Datasheet:	-
Manufacturer Catalogue & Product Selection:	-

Catalogue No: **CAQ7-16-11-240VAC**
CONTACTOR 3P 15kVAr 240V AC COIL 1N/O 1N/C AUXILIARY

Motor Control and Drives > Motor Starting and Protection > Contactors > Sprecher+Schuh Contactors > CA7 Contactors
 > CAQ7 Capacitor Switching Contactors

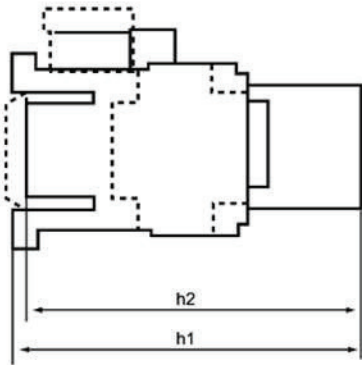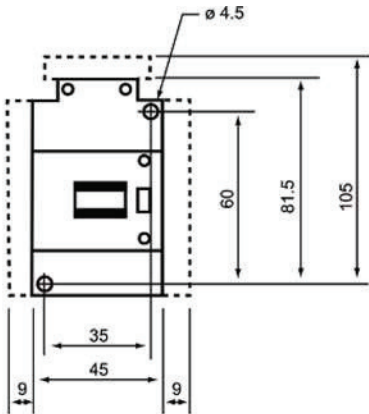

- Dimensions in mm
- Dimensions not intended for manufacturing purposes

Contactor	AC operated contactor		DC operated contactor	
	h1	h2	h1	h2
CAQ 7-16	120	115	146	141
CAQ 7-37	137	132	181	176

Dimension Diagram

Technical Diagram