

Catalogue No: **CMR7N-24VAC**

RESET MAGNET 24VAC CT7N/CT8

Motor Control and Drives > Motor Starting and Protection > Motor Protection > Sprecher + Schuh Overloads > Thermal (Bi-Metallic) Overloads > CT8 and CT7N Accessories



Representative Photo Only
(actual product may vary based on configuration selections)

Remote Reset Solenoid for CT8/CT7N, 24V 50/60Hz

- Choice of overload type to suit your application requirements
- Compact dimensions saves panel space


SPECIFICATIONS

Component Type	Motor Control and Drives	Accessory
Un, Nominal Operational Voltage, AC	24 V AC	
Rated Frequency	50 / 60 Hz	
Rated Operation Voltage	690 V AC	

REFERENCES

IECEX Certificate	-
Supplier Declaration of Conformity:	-
Installation Guide:	-
User Manual:	-
Manufacturer Datasheet:	-
Manufacturer Catalogue & Product Selection:	-

Remote Reset Solenoid
CMR7N

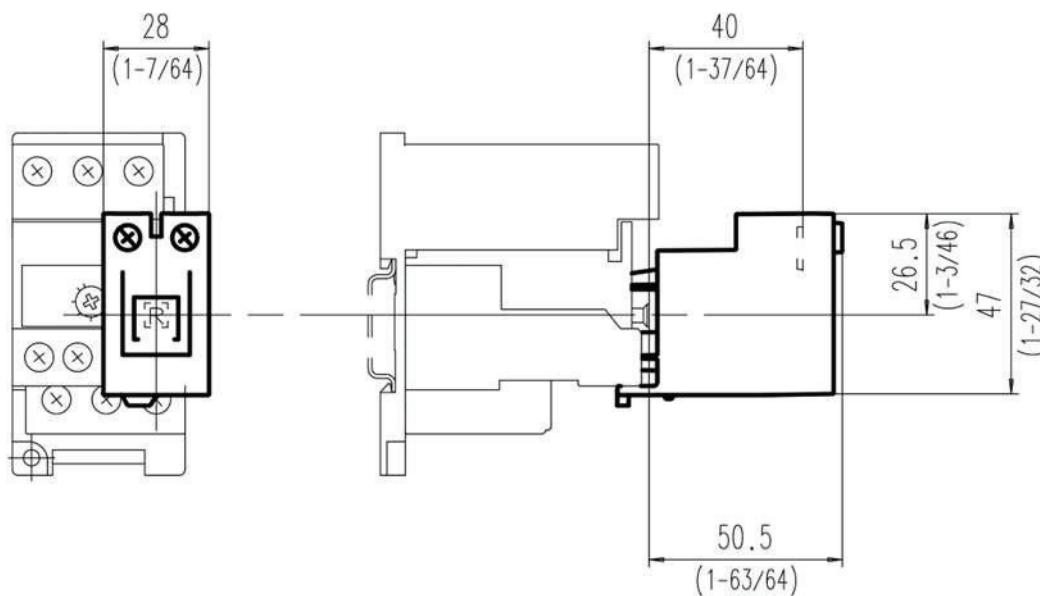

Dimension Diagram