

# Catalogue No: **EREV4-5PB-415VAC**

## STARTER COMPACT REVERSING START/STOP 2.2kW 415V AC CONTROL

Motor Control and Drives > Motor Starting and Protection > Assembled Motor Starters > Sprecher + Schuh Motor Starters > Reversing Motor Starters > EREV4 Streamline Reversing Motor Starters 2.2 to 4kW



Representative Photo Only  
(actual product may vary based on configuration selections)

Reversing Starter 2.2KW, IP66 Polycarbonate Enclosure, Control voltage 415 V AC, Forward, Reverse And Stop/Reset Pushbuttons, No Overload

- Wide range of NHP motor starting method versions available, allowing for correct selection of a motor starter to suit the application load condition requirements during starting
- Available in a number of IP ratings and enclosure type, to allow selection to meet the different installation environments

### SPECIFICATIONS

kW Rating, AC-3, 415V	2.2 kW @415V
Component Type Motor Control and Drives	Reversing Starter
IP Rating	IP66
Motor Connection	3 wire
Enclosure Type	Insulated polycarbonate enclosed (IP 66)
Control Voltage, AC, Nom	415 V AC
Button Arrangement	Reset Forward / Reverse / Stop


### REFERENCES

IECEX Certificate	-
Supplier Declaration of Conformity:	-
Installation Guide:	-
User Manual:	-
Manufacturer Datasheet:	-
Manufacturer Catalogue & Product Selection:	-

Catalogue No: **EREV4-5PB-415VAC**

**STARTER COMPACT REVERSING START/STOP 2.2kW 415V AC CONTROL**

Motor Control and Drives > Motor Starting and Protection > Assembled Motor Starters > Sprecher + Schuh Motor Starters > Reversing Motor Starters > EREV4 Streamline Reversing Motor Starters 2.2 to 4kW

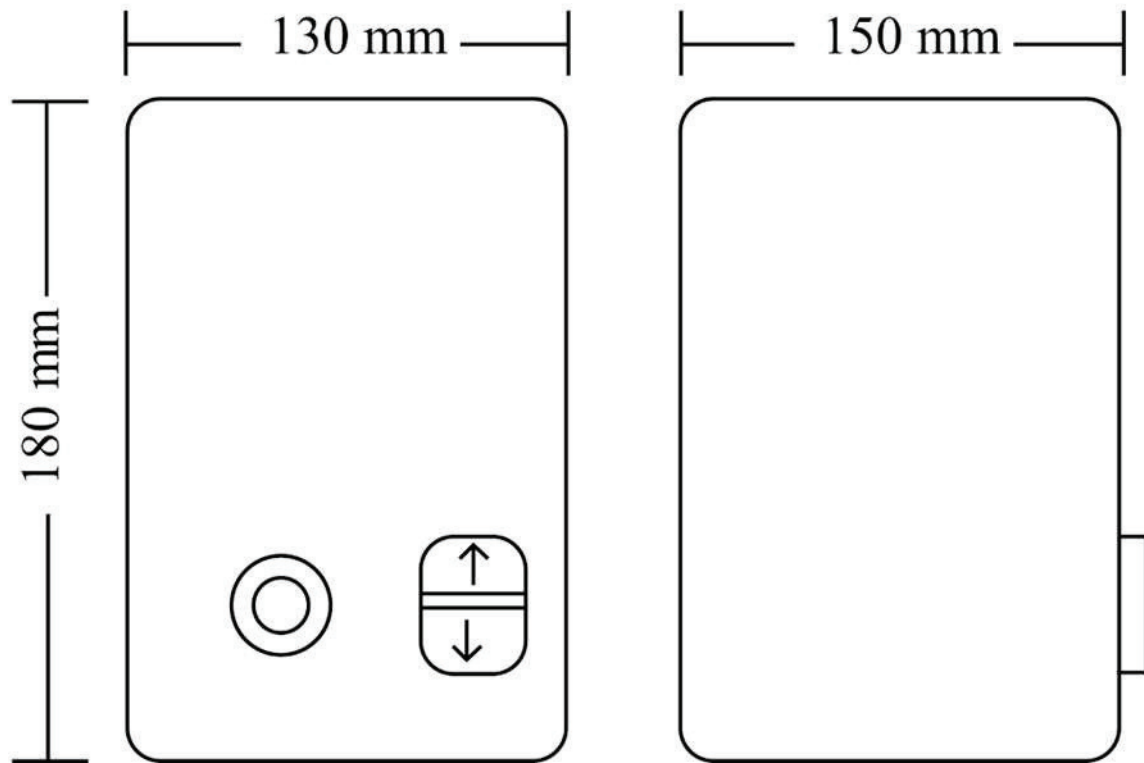

Dimension Diagram

Technical Diagram