


Water Immersion Elements (1¼" BSP Screw-in type) (Includes Thermostat Pocket)

Stokes Synertec's 1¼" BSP Screw-in type Immersion elements are available in single loop, double loop and dual elements (2) forms. Special voltages and wattages are available on request. All elements are supplied with a fibre sealing gasket. Optional terminal cover complete with a 16mm flexible conduit adaptor is available on request.

1 ¼ " Incoloy Sheath - Single and Double Loop


Cat. No.	Watts	Volts	A'mm
2221-125	600	240	150
2222-125	800	240	200
2223-125	1200	240	250
2224-125	1500	240	180
2225-125	1800	240	200
2226-125	2000	240	220
2227-125	2400	240	255
2228-125	3000	240	305
2229-125	3600	240	355
2230-125	4800	240	455

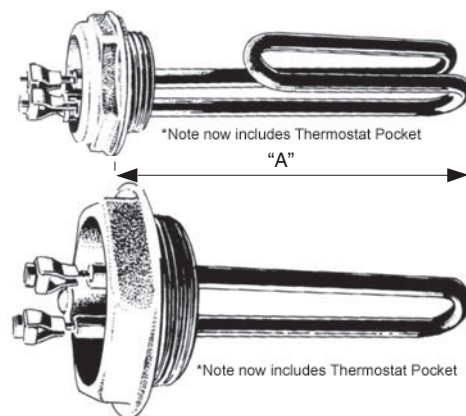

Incoloy Sheath - Dual Elements (120 kW/sq.m and 31 kW/sq.m)

Cat No.	120kw/sq.m	31kw/sq.m	Volts	A'mm
2261-125	1200	300	240	150
2262-125	1600	450	240	200
2263-125	2400	600	240	250
2264-125	3000	750	240	300
2265-125	3600	900	240	350
2266-125	4000	1000	240	385
2267-125	4800	1200	240	455
2268-125	6000	1500	240	550
2269-125	7200	1800	240	655
2270-125	9600	2400	240	855

Sheath ratings (120kW/sq.m and 31kW/sq.m)

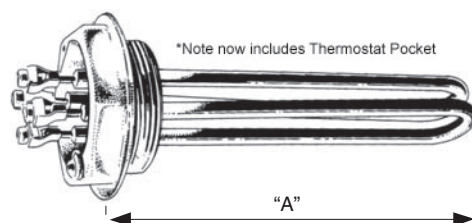


Oil Immersion Elements (Screw-in type) (Includes Thermostat Pocket)

Stokes Synertec's 1¼" Oil heating Elements are designed with various sheath ratings to suit most grades of oil and alkaline cleaning solutions. Special voltages and wattages are available on request. Heaters are supplied with a sealing gasket. Optional terminal cover complete with a 16mm flexible conduit adaptor.

1¼" BSP Series

Incoloy/Sheath - Dual Element (Sheath Ratings: 31kW/sq.m & 7.75kW/sq.m)

Cat.No.	31kw/sq.m	7.75kw/sq.m	Volts	A'mm
2251-125	1000	250	240	364
2252-125	1600	375	240	585
2253-125	2000	500	240	680
2254-125	2500	625	240	855
2255-125	3000	750	240	997
2256-125	3600	900	240	1190
2257-125	4000	1000	240	1320
2258-125	5000	1250	240	1640

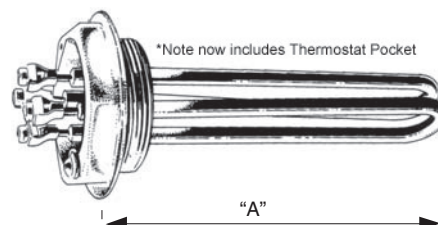

1¼" BSP Brass Lock Nut

Cat.No. 2221-21



Spun Aluminium Terminal Cover

Cat.No. 2219