



HSI-MP METALARC™ PROTECTED OVOID




- A family of metal halide lamps specially designed for use in open fixtures
- Excellent colour maintenance throughout lamp life
- UV-stop outer jacket for reduced risks of fading
- Large variety of colours and wattages, in both clear and phosphor coated lamps
- Very economical light source for downlighting applications in large public spaces, for example airport terminals, halls, hotel lobbies and open-plan offices
- Average lamp life: 15000 hours*

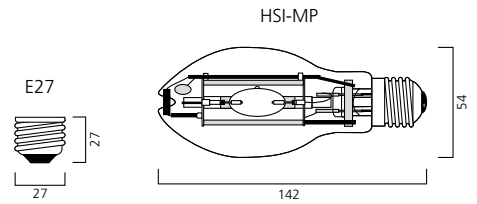


Metal Halide HSI-MP/WDL/CL




Metal Halide HSI-MP/WDL/CO



Metal Halide HSI-MP/NDL/CL



Metal Halide HSI-MP/NDL/CO



HSI-MP METALARC

| Code | Description | Watt | Volt | Current | Cap | Lamp Finish | Colour Temp | CRI Group | Luminous Flux* | Packing Qty. |
|------------------------|----------------|------|------|---------|-----|-------------|-------------|-----------|----------------|--------------|
| HSI-MP MetalArc | | | | | | | | | | |
| 207300 | MP 70W CL/WDL | 75W | 95V | 1.00A | E27 | Clear | 3000K | 2B | 5500 lm | 12 |
| 645610 | MP 70W CO/WDL | 75W | 95V | 1.00A | E27 | Coated | 2900K | 2A | 5200 lm | 12 |
| 208120 | MP 70W CL/NDL | 75W | 95V | 1.00A | E27 | Clear | 4000K | 2A | 800 lm | 12 |
| 208130 | MP 70W CO/NDL | 75W | 95V | 1.00A | E27 | Coated | 3800K | 2A | 5500 lm | 12 |
| 644090 | MP 100W CL/WDL | 100W | 100V | 1.15A | E27 | Clear | 3000K | 2B | 8500 lm | 12 |
| 644080 | MP 100W CO/WDL | 100W | 100V | 1.15A | E27 | Coated | 2900K | 2A | 7900 lm | 12 |
| 208220 | MP 100W CL/NDL | 100W | 105V | 1.15A | E27 | Clear | 4000K | 2A | 8500 lm | 12 |
| 208230 | MP 100W CO/NDL | 100W | 105V | 1.15A | E27 | Coated | 3800K | 2A | 8100 lm | 12 |
| 645600 | MP 150W CL/WDL | 150W | 95V | 1.80A | E27 | Clear | 3000K | 2B | 13000 lm | 12 |
| 645720 | MP 150W CO/WDL | 150W | 95V | 1.80A | E27 | Coated | 2900K | 2A | 12500 lm | 12 |
| 208320 | MP 150W CL/NDL | 150W | 95V | 1.80A | E27 | Clear | 4000K | 2A | 13000 lm | 12 |
| 644240 | MP 150W CO/NDL | 150W | 95V | 1.80A | E27 | Coated | 3800K | 2A | 12500 lm | 12 |

* Vertical position data