



SHP / SHP-T/ LU STANDARD



- Exclusive 'frameless' construction for improved reliability with fewer early failures
- Large wattage range with either clear tubular or coated ellipsoidal outer bulb
- Pleasant golden white light gives a warm colour appearance
- High luminous efficacy of up to 130 lm/W
- Major application in road lighting, both on motorways and in residential streets
- Excellent choice for general industrial lighting, both indoors and for outdoor floodlighting

SHP	50W	70W	100W	150W	250W	400W	
L	165	165	178	227	227	292	
D	72	72	78	91	91	122	
SHP-T	50W	70W	100W	150W	250W	400W	1000W
L	156	156	-	211	260	292	400
D	39	39	-	48	48	48	68
LU	1000W						
L	385						
D	80						

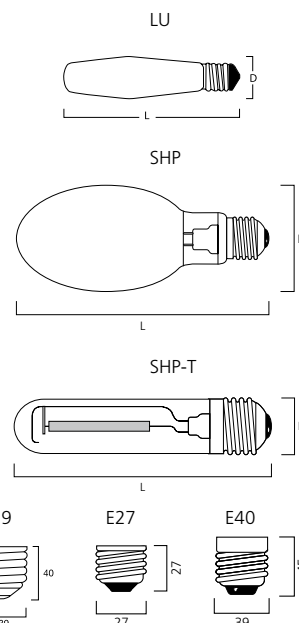

SHP / SHP-T / LU STANDARD

Code	Description	Watt	Volt	Current	Cap	Lamp Finish	Colour Temp	CRI Group	Luminous Flux	Average Rated Life	Packing Qty.
SHP Standard Elliptical											
673380	SHP 50W	50W	85V	0.76A	E27	Coated	2050K	4	3300 lm	20000 hrs	40
673260	SHP 70W	70W	90V	0.98A	E27	Coated	2050K	4	5800 lm	20000 hrs	40
206921	SHP 100W	100W	100V	1.20A	E27	Coated	2050K	4	8500 lm	20000 hrs	12
673150	SHP 150W	150W	100V	1.80A	E40	Coated	2050K	4	14000 lm	20000 hrs	12
672070	SHP 250W	250W	100V	3.00A	E40	Coated	2050K	4	27000 lm	20000 hrs	12
672050	SHP 400W	400W	105V	4.45A	E40	Coated	2050K	4	47000 lm	20000 hrs	12
SHP-T Standard Tubular											
204550	SHP-T 50W	50W	85V	0.76A	E27	Clear	2050K	4	3500 lm	20000 hrs	40
673340	SHP-T 70W	70W	90V	0.98A	E27	Clear	2050K	4	6000 lm	20000 hrs	40
673140	SHP-T 150W	150W	100V	1.80A	E40	Clear	2050K	4	14500 lm	24000 hrs	12
672060	SHP-T 250W	250W	100V	3.00A	E40	Clear	2050K	4	28000 lm	24000 hrs	12
672040	SHP-T 400W	400W	105V	4.60A	E40	Clear	2050K	4	48000 lm	24000 hrs	12
205180	SHP-T 1000W	960W	100V	10.6A	E40	Clear	2050K	4	130000 lm	18000 hrs	4
673000	LU 1000W	1000W	250V	4.70A	E39	Clear	2050K	4	130000 lm	24000 hrs	6