

[SENTRY]

LED FLOODLIGHT



Description

Versatile and designed to suit a wide range of industrial and commercial lighting applications with an efficacy of up to 150lm/W, the [SENTRY] is the ideal replacement for conventional flood lighting across the range of wattages. The [SENTRY] body is built from premium aluminium ensuring maximum strength with minimum weight.




Key Features

- Wattage Selectable (200W model only)
- Unique angled bracket design to allow easy installation with power tools
- Slim design for easy installation
- Highly efficient achieving up to 150lm/W
- Suitable for a wide range of applications including area, security and commercial lighting
- Asymmetric beam angle for more effective and even light distribution

Wattage Selection*

Onboard wattage selection with five selectable wattages.

**FS-200DT2-W model only*



Flexible Installation

Angled bracket to allow easy installation with power tools.


Wattage Selectable Options

FS-200DT2-W Model

Selectable Wattages 200W/180W/150W/120W/100W

Output Levels


100W	- 16,300lm
120W	- 19,440lm
150W	- 23,625lm
180W	- 27,360lm
200W	- 30,000lm

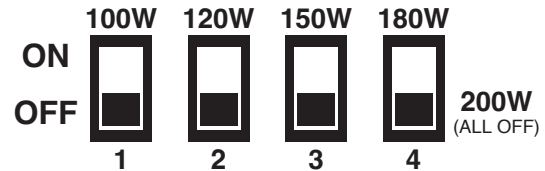

Technical Specifications

Rated Life	≥50,000 hours	Operating Temperature	-20°C to + 40°C
Body	Aluminium	Input Voltage	90-305 VAC ~ 50/60Hz
Installation	Adjustable bracket	IP Rating	IP65
Beam Angle	Asymmetric T2	IK Rating	IK08
Power Factor	>0.90	Connection	Flex and plug (1.2m)
CRI	>70	Weight	100W: 2.7kg / 150W: 3.2kg / 200W-100W: 3.8kg

Dimensional Drawing

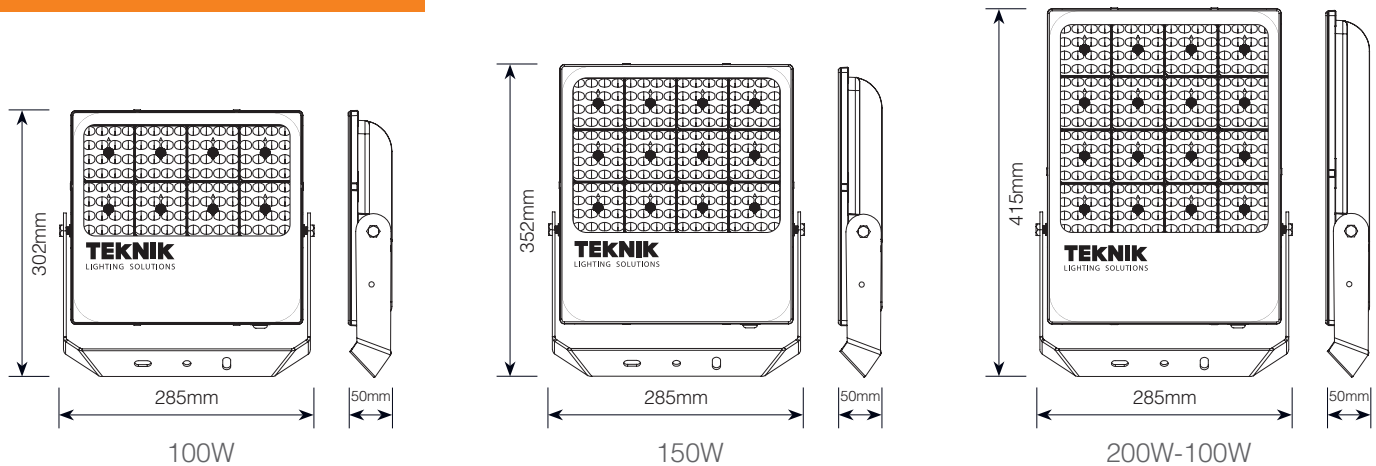

Product Data

Part Number	Power	Lumen Output	CCT
FS-100DT2	100W	15,000lm	5000K
FS-150DT2	150W	22,500lm	5000K
FS-200DT2-W	200W-100W	30,000lm-16,300lm	5000K

Accessories



Pole Mount
FV-BRKT-PM