

# [OYSTER]


## LED CEILING LIGHT

The [OYSTER] is a LED ceiling light designed to suit a range of residential and commercial applications. It's long life time of over 50,000 hours is backed by it's tier 1 components.



### Features and Benefits

- > Versatile fitting with tri-colour switchable function: 3000K, 4000K, 5700K
- > Tier 1 components ensure a long lifetime of >50,000 hours

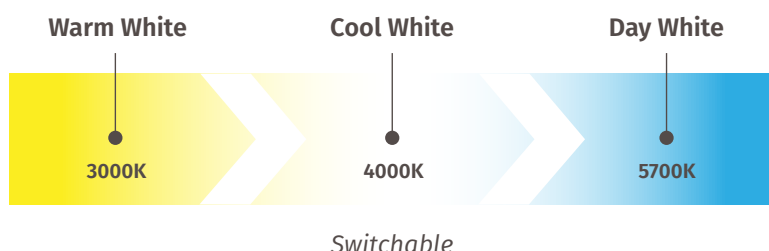

| PART NUMBER   | POWER | CCT(SWITCHABLE)      | LUMEN OUTPUT | BEAM ANGLE | DIMENSION    |
|---------------|-------|----------------------|--------------|------------|--------------|
| OU-350-16S120 | 16W   | 3000K, 4000K, 57000K | 1440-1570lm  | 120°       | Ø350 x 106mm |
| OU-380-25S120 | 25W   | 3000K, 4000K, 57000K | 2170-2500lm  | 120°       | Ø380 x 120mm |



IP20




## [OYSTER] LED CEILING LIGHT DATA SHEET



### Technical Specifications

|                     |                     |                              |                          |
|---------------------|---------------------|------------------------------|--------------------------|
| <b>Rated Life</b>   | ≥50,000 hours       | <b>Operating Temperature</b> | -20°C to +45°C           |
| <b>Body</b>         | Polycarbonate/Steel | <b>Input Voltage</b>         | 220-240VAC ~ 50/60Hz     |
| <b>Installation</b> | Surface mount       | <b>IP Rating</b>             | IP20                     |
| <b>Beam Angle</b>   | 120°                | <b>Connection</b>            | Terminal Block           |
| <b>Power Factor</b> | >0.9                | <b>Net Weight</b>            | 16W(0.635kg) 25W(0.74kg) |
| <b>CRI</b>          | >80                 |                              |                          |

### Dimensional Drawing

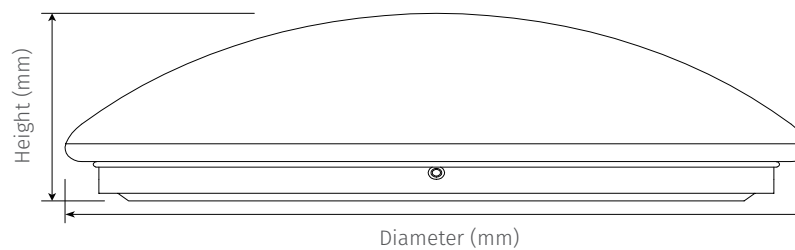

| Model         | Dia. | H   | N.W (Kgs) |
|---------------|------|-----|-----------|
| OU-350-16S120 | Ø350 | 106 | 0.635     |
| OU-380-25S120 | Ø380 | 120 | 0.74      |

Unit = mm