

Moisture-proof diffuser luminaire


An IP65 rated LED luminaire for high quality low energy lighting in wet, dusty environments. Switchable light colour: choose between warm white (3000 K), cool white (4000 K) or daylight (5700 K) to suit the application. High quality opal polycarbonate (UV stabilised) diffuser ensures uniform lighting without visible spots. High efficacy, up to 50% energy saving compared with T8 fluorescent. The traditional design gives an aesthetically pleasing appearance – ideal for point for point replacement on refurbishment projects.

Body: polycarbonate


Diffuser: opal polycarbonate (UV stabilised)

Brackets: stainless steel

Weight: 1.23 kg

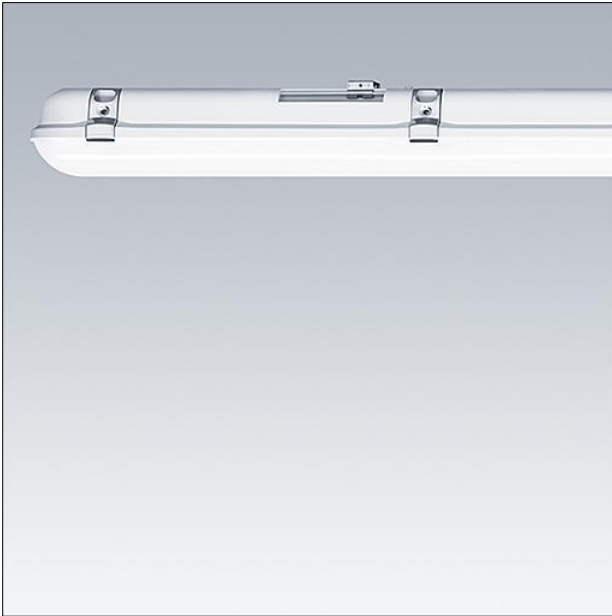


TE_JULIE_F_side.jpg

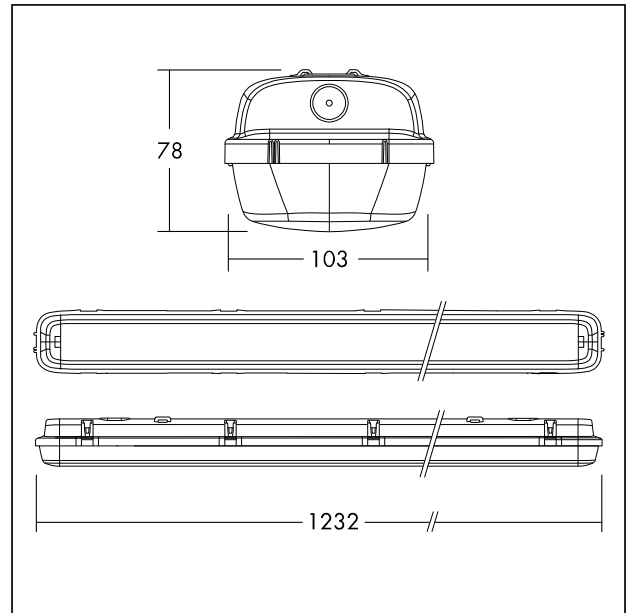

TE_JULIE_M_IILD2_1200.wmf

Light Distribution

STD - standard

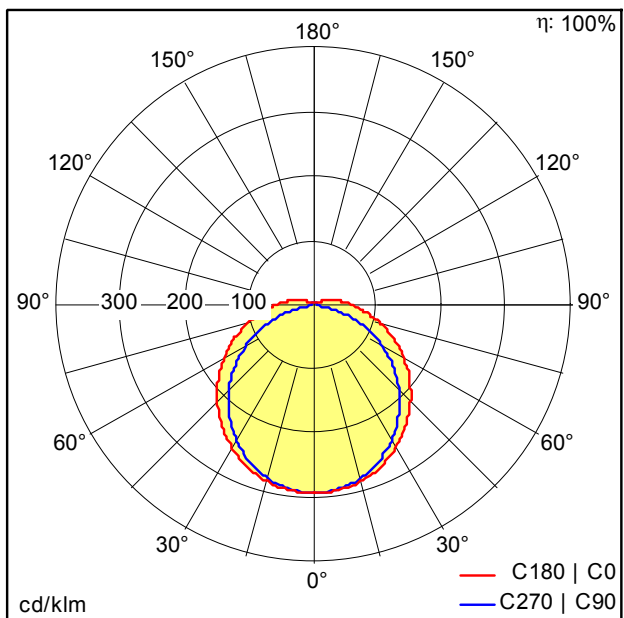

TE_JULIE_VAR_LED_1200_4200_4000K.idt