


TECHNICAL DATA SHEET

Riteway Cable Tray

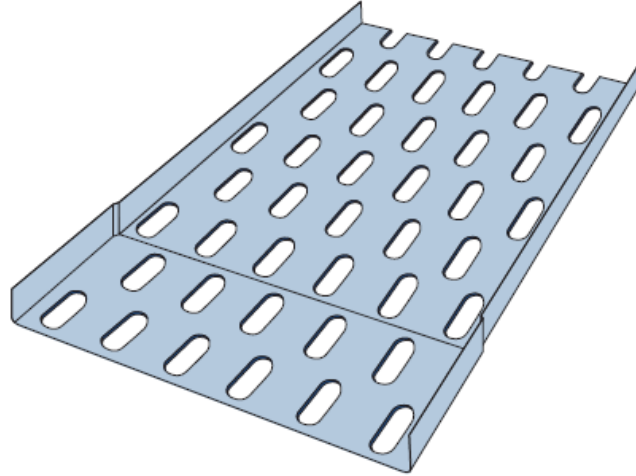

Load Data

Tray width (mm)	Span Metres				
	1.0	1.2	1.5	2.0	2.4
75	10.0	6.9	4.4	2.5	1.75
100	10.0	6.9	4.4	2.5	1.75
150	10.0	6.9	4.4	2.5	1.75
200	10.0	6.9	4.4	2.5	1.75
300	12.8	8.8	5.6	3.2	2.05
450	24.0	16.6	10.6	6.0	3.85
600	24.0	16.6	10.6	6.0	3.85

Note: Load Carrying Capacities (kg/m) of Standard Galvabond Riteway Tray.

Features

12mm Square Edge. "Joggled" end on tray provides built in splice connection on straight lengths.

Punched slots accept 12.7mm wide cable tie.

Recommended joining hardware is:

M6 x 8 Gutter Bolt and M6 Flange Nut.

Standard Finish: Galvabond.

Also available in: Hot dipped galvanised, Aluminium, Powder Coated & 316 Stainless Steel.

Nominated Standard Widths:

75, 100, 150, 200, 300, 450 and 600mm.