

STANDARD, FLAT & VENTILATED COVERS FOR STAINLESS STEEL GRADE 316 FINISH REPLACE PREFIX “LA” & “LE” WITH “LU”

LADDER AND TRAY COVERS

Covers are normally specified where protection is required:

1. To safeguard against damage to cable and insulation from falling objects—dropped tools, discarded cigarettes, sparks or solid materials.
2. Covers protect cable insulation and fixings (plastic ties etc.) from harmful effects of ultra-violet light or weathering deterioration.
3. In areas where high levels of airborne particles are present, covers prevent accumulation of dust or other debris on cables, which may cause heat build up, fire hazards or absorb moisture, which may shorten life of installation.

AVAILABILITY




Standard covers are available for all Unistrut® cable ladder systems and UNI-TRAY® systems. Standard length is 3 meters. Flat, peaked or ventilated covers are available by special order.

MATERIAL

Hot-dip galvanised steel sheet to AS1397.

STEEL STANDARD COVERS

Type	Nominal Width	Width	Part Number
UT3/UT5 & 12B	150	176	LEE6013H
UT3/UT5 & 12B	300	326	LEE6033H
UT3/UT5 & 12B	450	476	LEE6043H
UT3/UT5 & 12B	600	626	LEE6063H
16A	150	201	LEG6013H
16A	300	351	LEG6033H
16A	450	501	LEG6043H
16A	600	651	LEG6063H
20B/20C	150	215	LEK6013H
20B/20C	300	365	LEK6033H
20B/20C	450	515	LEK6043H
20B/20C	600	665	LEK6063H
12B/16A/20B & 20C RAIL IN	150	154	LEM6013H
12B/16A/20B & 20C RAIL IN	300	304	LEM6033H
12B/16A/20B & 20C RAIL IN	450	454	LEM6043H
12B/16A/20B & 20C RAIL IN	600	604	LEM6063H

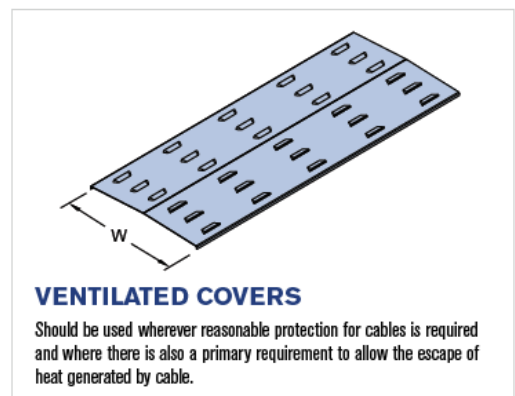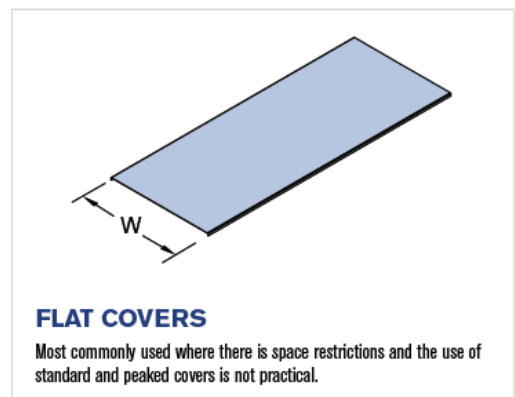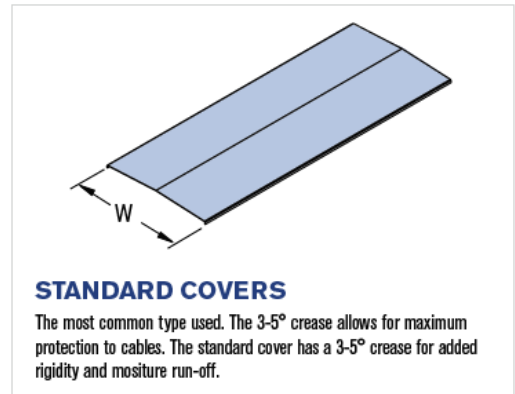

For UT3 & UT5 covers use the LE60** SERIES