


## VSD/EMC CABLES

## LOW VOLTAGE INDUSTRIAL CABLES

### 300/500V Flexible VSD/EMC Control Cable

Class 5 Flexible Stranded Bare Copper Conductor, PVC V75 Insulated, Bedded, Sheathed and Tinned Copper Braid Screened.

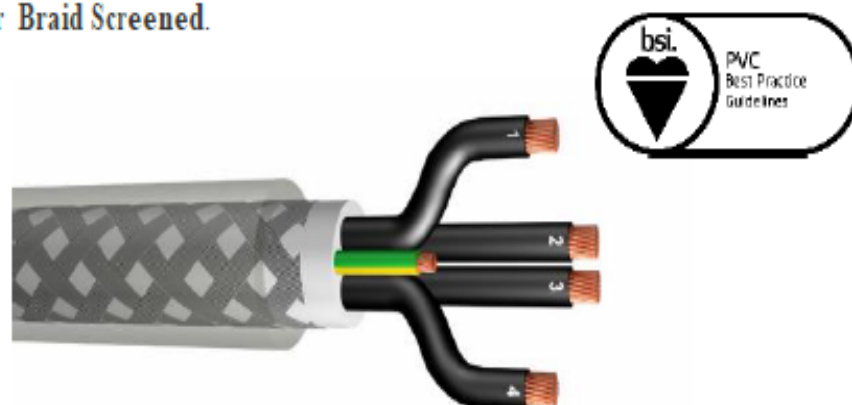

| Product Code | No of Cores | Nominal Area (mm <sup>2</sup> ) | Over Bedding Dia. (mm) | Cable Diameter (mm) | Cable Weight (Kg/km) |
|--------------|-------------|---------------------------------|------------------------|---------------------|----------------------|
| 8200         | 2C+E        | 0.5                             | 4.8                    | 7.2                 | 89.5                 |
| 8201         | 3C+E        | 0.5                             | 5.7                    | 7.9                 | 105.8                |
| 8202         | 4C+E        | 0.5                             | 6.3                    | 8.5                 | 119.7                |
| 8203         | 6C+E        | 0.5                             | 7.0                    | 9.2                 | 147.9                |
| 8204         | 11C+E       | 0.5                             | 9.1                    | 11.7                | 228.9                |
| 8205         | 24C+E       | 0.5                             | 13.1                   | 15.3                | 383.6                |
|              |             |                                 |                        |                     |                      |
| 8206         | 3C+E        | 0.75                            | 6.2                    | 8.4                 | 121.2                |
| 8207         | 6C+E        | 0.75                            | 7.6                    | 10.0                | 163.0                |
| 8208         | 11C+E       | 0.75                            | 9.9                    | 12.5                | 292.6                |
| 8209         | 17C+E       | 0.75                            | 11.8                   | 14.8                | 393.2                |